
DIN Rail Mounting Power Supply


ACRO ENGINEERING INC.



CE

c UL us LISTED

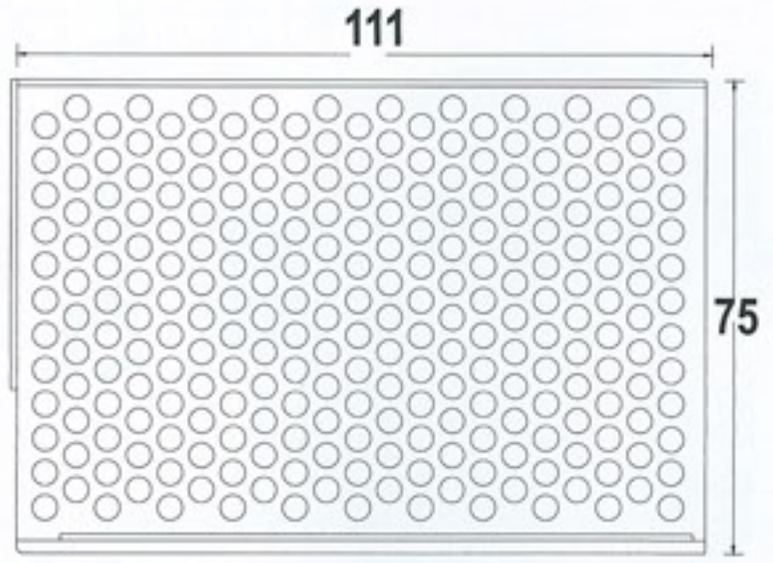

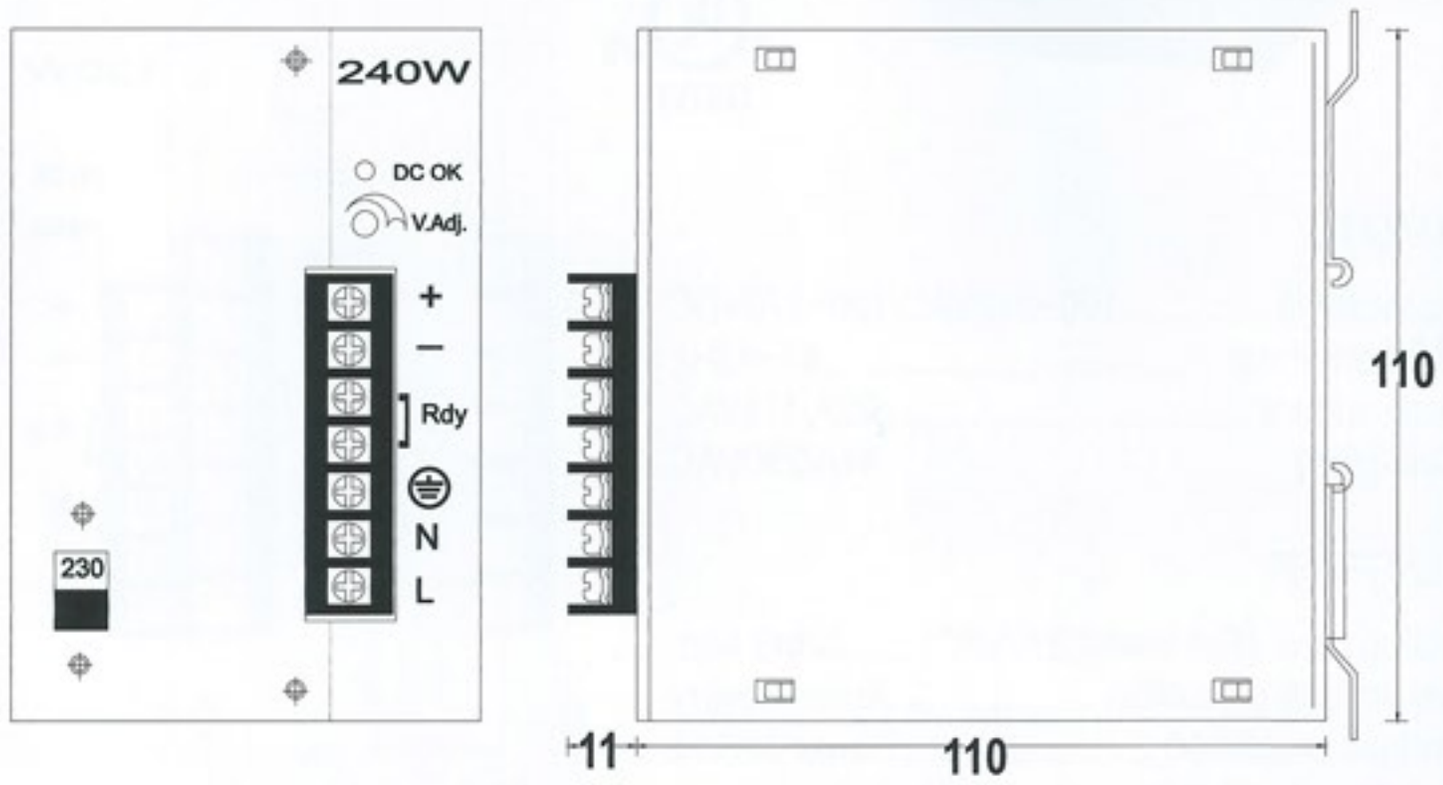

INPUT

Input voltage .....115/230VAC selectable
Input frequency.....47~63Hz
Inrush current 22A/115VAC
(Cold start) 44A/230VAC

OUTPUT

Hold-up time (Full load@230VAC) .....20mS Min.
Over voltage protection .....Autorecovery
Overload protection .....Power limited
Short circuit protection .....Autorecovery

Dimensions:121(D)x110(H)x75(W)mm

AD1240S Series — Single output

Model	O/P voltage Adjustment	Loading (A) Min.	Rated	Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD1240-12S	+12VDC±10%	0A	20A	20A	100mVp-p	± 1%	± 1%	80%	17VDC Max.	Option	None	Yes	Yes	None
AD1240-24S	+24VDC±10%	0A	10A	10A	150mVp-p	± 1%	± 1%	82%	30VDC Max.	Option	None	Yes	Yes	None
AD1240-48S	+48VDC±10%	0A	5A	5A	250mVp-p	± 1%	± 1%	82%	56VDC Max.	Option	None	Yes	Yes	None

AD1360S Series — Single output

Model	O/P voltage Adjustment	Loading (A) Min.	Rated	Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD1360-24S	+24VDC±10%	0A	15A	15A	150mVp-p	± 1%	± 1%	82%	30VDC Max.	Option	None	None	Yes	None
AD1360-48S	+48VDC±10%	0A	7.5A	7.5A	250mVp-p	± 1%	± 1%	82%	56VDC Max.	Option	None	None	None	None

AD2240S Series — Dual output

Model	O/P voltage Adjustment	Loading (A) Min.	Rated	Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD22402S	+24VDC±10%	0A	9A	9A	150mVp-p	± 1%	± 2%	82%	30VDC Max.	None	200pcs	None	None	None
	+5VDC ------	0A	3A	3A	60mVp-p	± 2%	± 2%		-------					
AD22403S	+48VDC±10%	0A	4.5A	4.5A	250mVp-p	± 1%	± 2%	82%	56VDC Max.	None	200pcs	None	None	None
	+5VDC ------	0A	3A	3A	60mVp-p	± 2%	± 2%		-------					

SEC.RU | Короткий путь к информации
Скачано с sec.ru