






INPUT

Input voltage100~240VAC/120~370VDC
Input frequency.....47~63Hz
Inrush current22A/115VAC
(Cold start) 44A/230VAC

OUTPUT

Hold-up time (Full load@230VAC)20mS Min.
Over voltage protectionAutorecovery
Overload protectionPower limited
Short circuit protectionAutorecovery

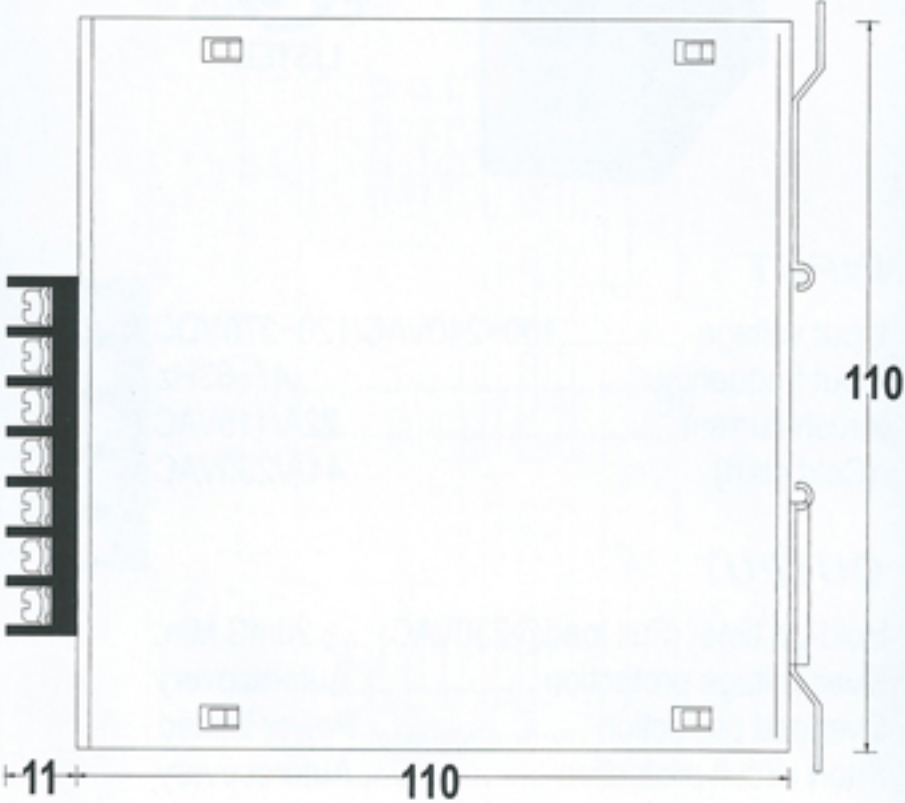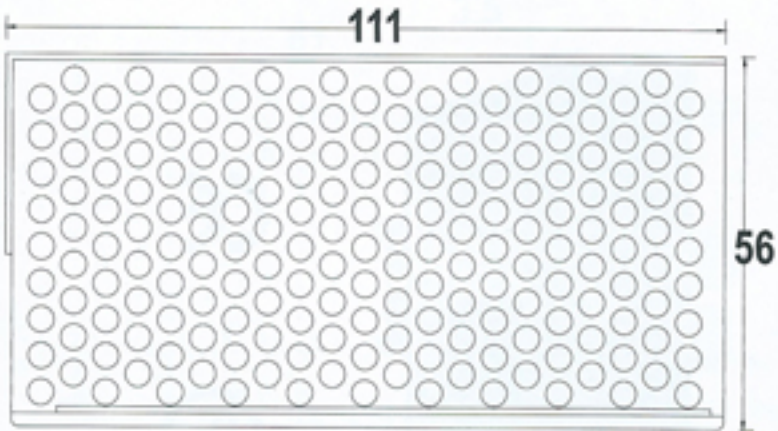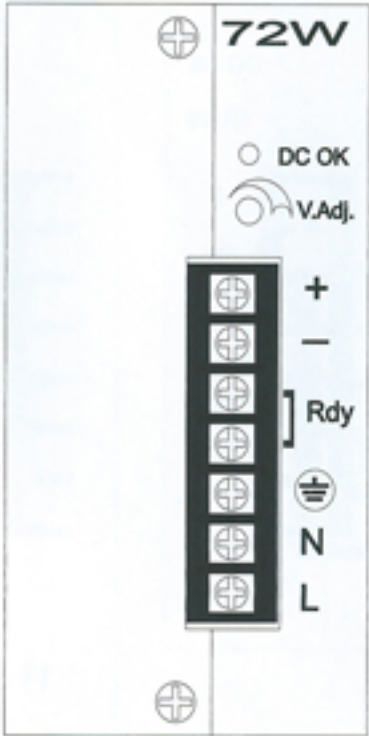

Dimensions:121(D)x110(H)x56(W)mm

AD1072F Series

Single output

Model	O/P voltage Adjustment	Loading (A)			Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
		Min.	Rated	Max.										
AD1072-12F	+12VDC±10%	0A	6.0A	6.0A	100mVp-p	± 1%	± 1%	78%	17VDC Max.	Option	None	Yes	Yes	None
AD1072-24F	+24VDC±10%	0A	3.0A	3.0A	150mVp-p	± 1%	± 1%	81%	30VDC Max.	Option	None	Yes	Yes	None
AD1072-48F	+48VDC±10%	0A	1.5A	1.5A	250mVp-p	± 1%	± 1%	82%	56VDC Max.	Option	None	Yes	None	None

