






## INPUT

Input voltage .....100~240VAC/120~370VDC  
Input frequency.....47~63Hz  
Inrush current .....22A/115VAC  
(Cold start) 44A/230VAC

## OUTPUT

Hold-up time (Full load@230VAC) .....20mS Min.  
Over voltage protection .....Autorecovery  
Overload protection .....Power limited  
Short circuit protection .....Autorecovery

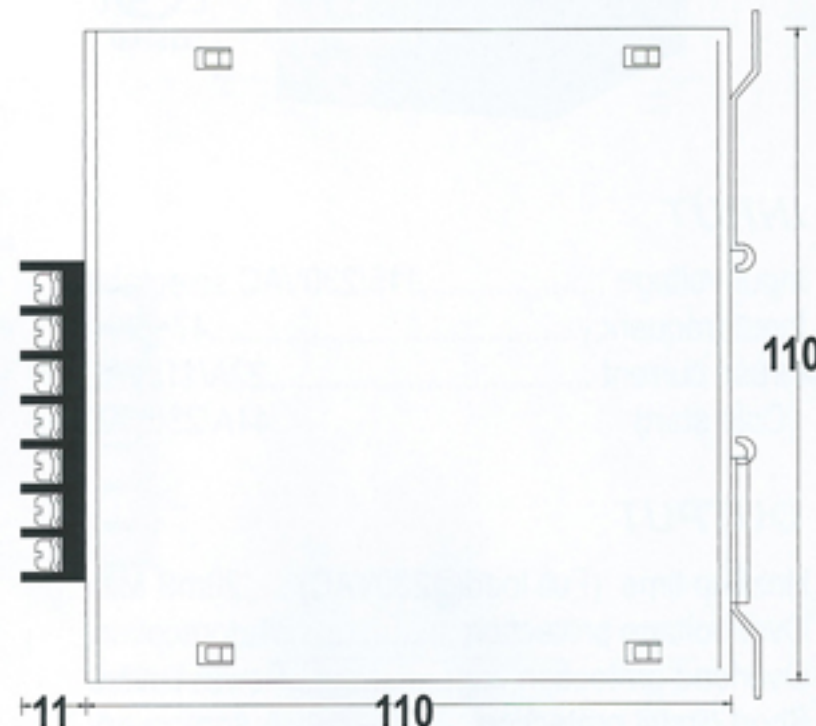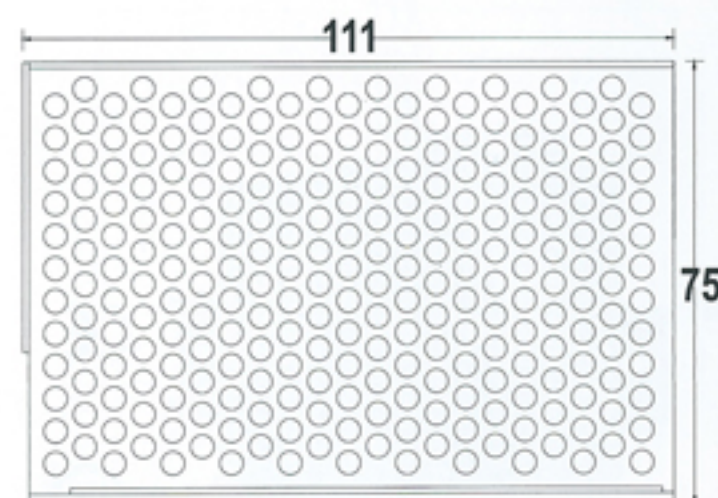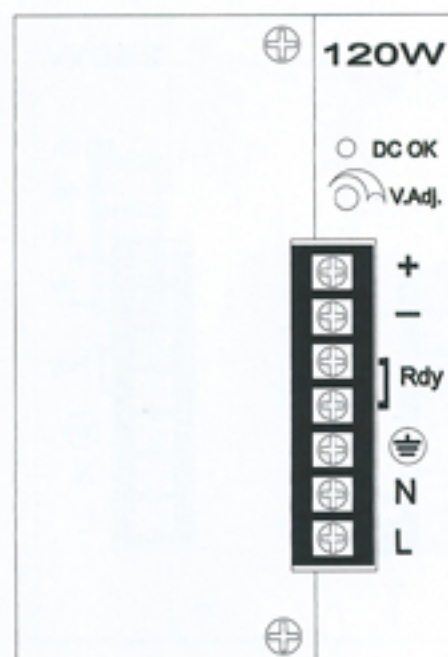

Dimensions:121(D)x110(H)x75(W)mm

## AD1120F Series

## Single output

| Model      | O/P voltage Adjustment | Loading (A)<br>Min. Rated Max. | Ripple Noise | Line Reg. | Load Reg. | Eff. | O.V.P.     | Redundant Function | MOQ  | CB  | UL  | TUV  |
|------------|------------------------|--------------------------------|--------------|-----------|-----------|------|------------|--------------------|------|-----|-----|------|
| AD1120-12F | +12VDC±10%             | 0A 10A 10A                     | 100mVp-p     | ± 1%      | ± 1%      | 81%  | 17VDC Max. | Option             | None | Yes | Yes | None |
| AD1120-24F | +24VDC±10%             | 0A 5A 5A                       | 150mVp-p     | ± 1%      | ± 1%      | 83%  | 30VDC Max. | Option             | None | Yes | Yes | None |
| AD1120-48F | +48VDC±10%             | 0A 2.5A 2.5A                   | 250mVp-p     | ± 1%      | ± 1%      | 84%  | 56VDC Max. | Option             | None | Yes | Yes | None |

## AD1150F Series

## Single output

| Model      | O/P voltage Adjustment | Loading (A)<br>Min. Rated Max. | Ripple Noise | Line Reg. | Load Reg. | Eff. | O.V.P.     | Redundant Function | MOQ  | CB  | UL  | TUV  |
|------------|------------------------|--------------------------------|--------------|-----------|-----------|------|------------|--------------------|------|-----|-----|------|
| AD1150-12F | +12VDC±10%             | 0A 12.5A 12.5A                 | 100mVp-p     | ± 1%      | ± 1%      | 80%  | 17VDC Max. | Option             | None | Yes | Yes | None |
| AD1150-24F | +24VDC±10%             | 0A 6.3A 6.3A                   | 150mVp-p     | ± 1%      | ± 1%      | 82%  | 30VDC Max. | Option             | None | Yes | Yes | None |
| AD1150-48F | +48VDC±10%             | 0A 3.2A 3.2A                   | 250mVp-p     | ± 1%      | ± 1%      | 83%  | 56VDC Max. | Option             | None | Yes | Yes | None |



**SEC.RU**

ПОРТАЛ ПО БЕЗОПАСНОСТИ