
DIN Rail Mounting Power Supply


ACRO ENGINEERING INC.




CE

c UL us LISTED

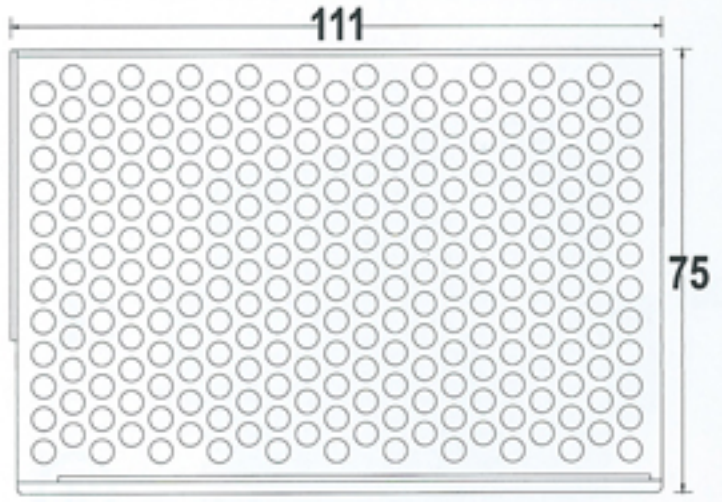

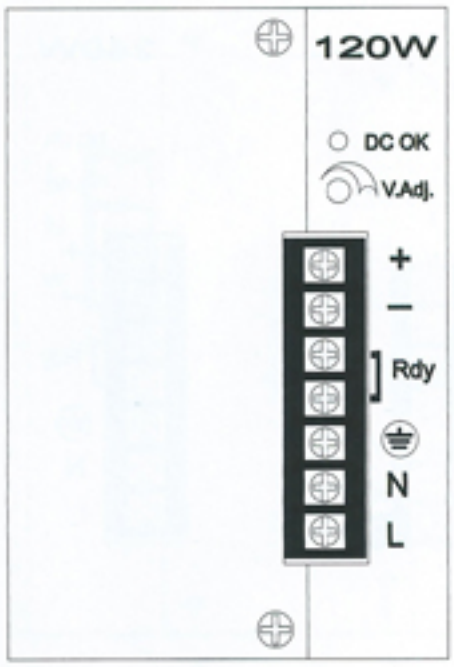

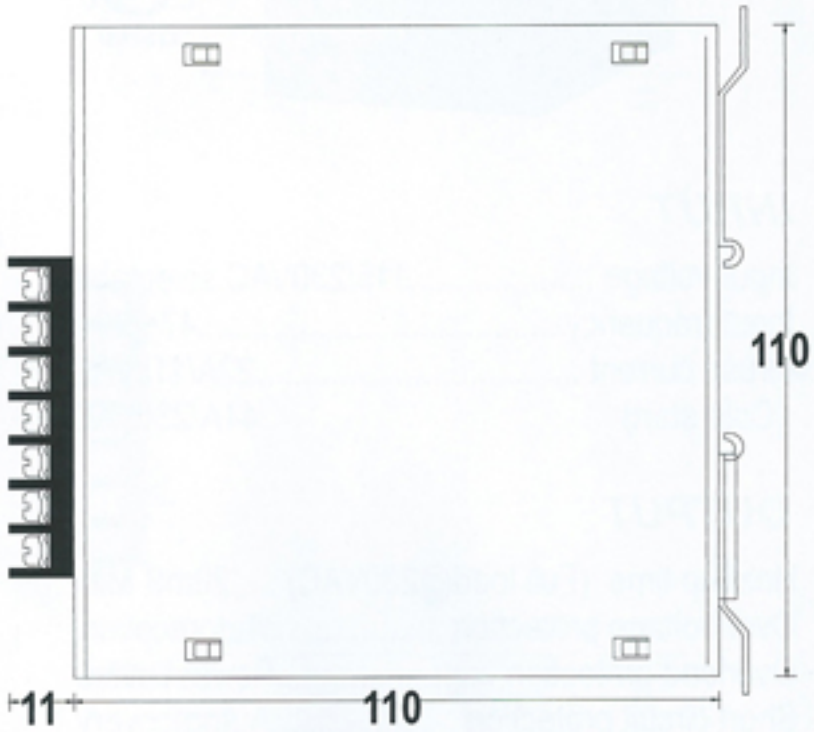

INPUT

Input voltage .....100~240VAC/120~370VDC
Input frequency.....47~63Hz
Inrush current 22A/115VAC
(Cold start) 44A/230VAC

OUTPUT

Hold-up time (Full load@230VAC) .....20mS Min.
Over voltage protection .....Autorecovery
Overload protection .....Power limited
Short circuit protection .....Autorecovery

Dimensions:121(D)x110(H)x75(W)mm

AD1120F Series Single output

Model	O/P voltage Adjustment	Loading (A) Min.	Rated	Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD1120-12F	+12VDC±10%	0A	10A	10A	100mVp-p	± 1%	± 1%	81%	17VDC Max.	Option	None	Yes	Yes	None
AD1120-24F	+24VDC±10%	0A	5A	5A	150mVp-p	± 1%	± 1%	83%	30VDC Max.	Option	None	Yes	Yes	None
AD1120-48F	+48VDC±10%	0A	2.5A	2.5A	250mVp-p	± 1%	± 1%	84%	56VDC Max.	Option	None	Yes	Yes	None

AD1150F Series Single output

Model	O/P voltage Adjustment	Loading (A) Min.	Rated	Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD1150-12F	+12VDC±10%	0A	12.5A	12.5A	100mVp-p	± 1%	± 1%	80%	17VDC Max.	Option	None	Yes	Yes	None
AD1150-24F	+24VDC±10%	0A	6.3A	6.3A	150mVp-p	± 1%	± 1%	82%	30VDC Max.	Option	None	Yes	Yes	None
AD1150-48F	+48VDC±10%	0A	3.2A	3.2A	250mVp-p	± 1%	± 1%	83%	56VDC Max.	Option	None	Yes	Yes	None

SEC.RU | Короткий путь к информации Скачано с sec.ru