





INPUT

Input voltage115/230VAC selectable
Input frequency.....47~63Hz
Inrush current22A/115VAC
(Cold start) 44A/230VAC

OUTPUT

Hold-up time (Full load@230VAC)20mS Min.
Over voltage protectionAutorecovery
Overload protectionPower limited
Short circuit protectionAutorecovery

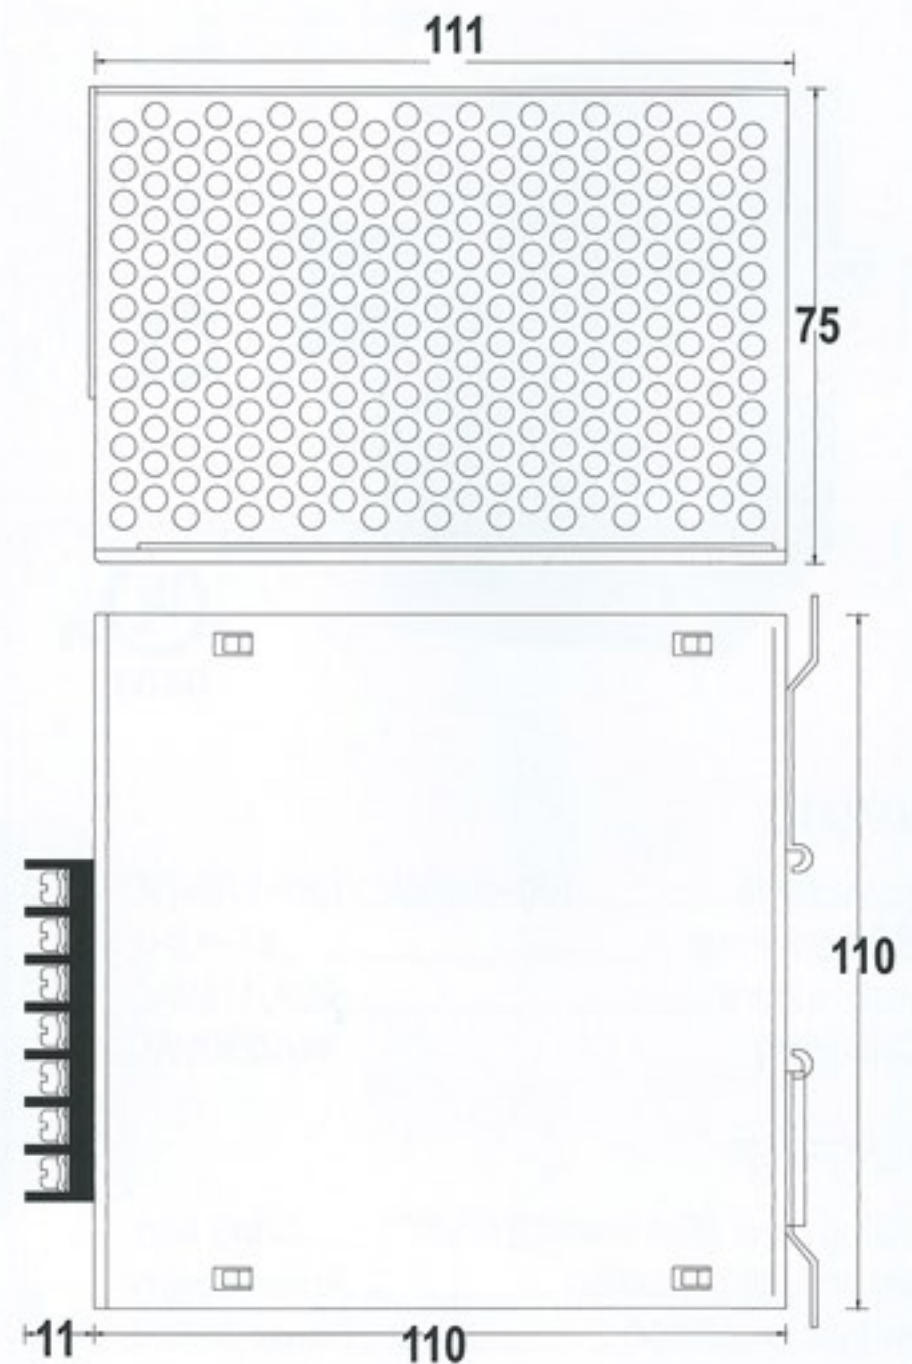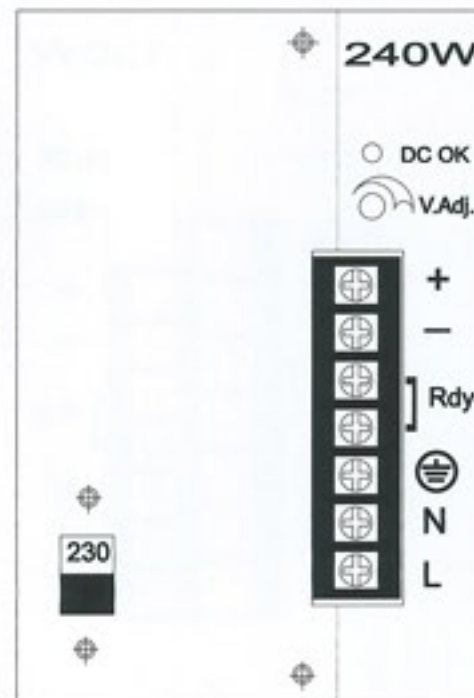

Dimensions:121(D)x110(H)x75(W)mm

AD1240S Series

Single output

Model	O/P voltage Adjustment	Loading (A) Min. Rated Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD1240-12S	+12VDC±10%	0A 20A 20A	100mVp-p	± 1%	± 1%	80%	17VDC Max.	Option	None	Yes	Yes	None
AD1240-24S	+24VDC±10%	0A 10A 10A	150mVp-p	± 1%	± 1%	82%	30VDC Max.	Option	None	Yes	Yes	None
AD1240-48S	+48VDC±10%	0A 5A 5A	250mVp-p	± 1%	± 1%	82%	56VDC Max.	Option	None	Yes	Yes	None

AD1360S Series

Single output

Model	O/P voltage Adjustment	Loading (A) Min. Rated Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD1360-24S	+24VDC±10%	0A 15A 15A	150mVp-p	± 1%	± 1%	82%	30VDC Max.	Option	None	None	Yes	None
AD1360-48S	+48VDC±10%	0A 7.5A 7.5A	250mVp-p	± 1%	± 1%	82%	56VDC Max.	Option	None	None	None	None

AD2240S Series

Dual output

Model	O/P voltage Adjustment	Loading (A) Min. Rated Max.	Ripple Noise	Line Reg.	Load Reg.	Eff.	O.V.P.	Redundant Function	MOQ	CB	UL	TUV
AD22402S	+24VDC±10%	0A 9A 9A	150mVp-p	± 1%	± 2%	82%	30VDC Max.	None	200pcs	None	None	None
	+5VDC -----	0A 3A 3A	60mVp-p	± 2%	± 2%		-----					
AD22403S	+48VDC±10%	0A 4.5A 4.5A	250mVp-p	± 1%	± 2%	82%	56VDC Max.	None	200pcs	None	None	None
	+5VDC -----	0A 3A 3A	60mVp-p	± 2%	± 2%		-----					

