



ISO 9001

Art. WO 824
WO 1024



- | | | | |
|--------------|--|--------------|--|
| (GB) | "O" GROOVED WHEEL SINGLE BEARING | (RUS) | РОЛИК НИЖНИЙ, ПРОФИЛЬ «О», ОДНОПОДШИПНИКОВЫЙ |
| (D) | LAUFROLLE FÜR „O“ PROFIL MIT LAGER | (TR) | "O" OLUKLU TEKERLEK, TEK RULMANLI |
| (F) | ROUE À GORGE EN « O » ET UN ROULEMENT | (AR) | "O" ٥٥٥٥ ٥٥٥ ٥٥٥ ٥٥٥ ٥٥٥ ٥٥٥ ٥٥٥ |
| (E) | RODAMIENTO EXCLUSIVO CON RUEDA ROSCADA EN "O" | (CHN) | "O"型槽轮单轴承 |
| (P) | ROLAMENTO ÚNICO DE ROLDANA SULCADA EM "O" | (MAL) | BEARING TUNGGAL RODA BERALUR "O" |
| (I) | RUOTA MONOCUSCINETTO CON SCANALATURA "O" | (H) | O-HORNYS GÖRGÖ EGY CSAPÁGGYAL |
| (CZ) | KLADKA SPODNÍ POJEZDOVÁ „O“ PROFIL, JEDNOLOŽISKOVÁ | (PL) | ROLKA O PROFILU „O“ Z POJEDYNCZYM ŁOŻYSKIEM |
| (NL) | "O" WIEL ENKELE LAGER | (SK) | KLADKA SPODNÁ POJAZDOVÁ „O“ PROFIL, JEDNOLOŽISKOVÁ |
| (DK) | "O" HJUL MED RILLER ENKELT LEJE | (RO) | ROATĂ FORMĂ „O“ CU UN SINGUR LAGĂR |
| (N) | "O"-RILLEDE HJUL MED ENKELTLAGER | (HR) | KOTAČ S „O“ UTOROM I JEDNIM LEŽAJEM |
| (S) | ENKELLAGRAT SPÄRHJUL MED "O" SPÄR | (SLO) | TEKALNO KOLO Z "O" UTOROM Z ENIM LEŽAJEM |
| (FIN) | "O"-URAINEN PYÖRÄ YKSITÄISELLÄ LAAKERILLA | | |

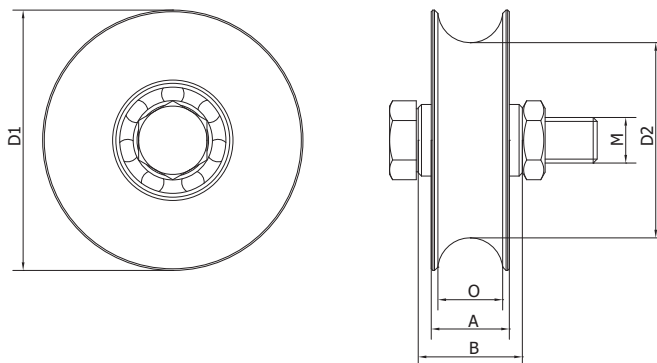

Art.	D1	D2	A	B	M	O	CAPACITY	1 pc			
	O		mm			O	kg	kg	pcs	kg	
WO 824	80	59	24	32	M14x55	21	150	0,6	20	12	
WO 1024	100	79	24	32	M14x55	21	300	1,1	16	17,6	



SEC.RU

ПОРТАЛ ПО БЕЗОПАСНОСТИ