






ISO 9001

Art. WSO 824;
924; 1024



- (GB) "O" GROOVED WHEEL SINGLE BEARING, INTERNAL SUPPORT
(D) LAUFROLLE MIT „O“ PROFIL MIT STÜTZE UND LAGER
(F) ROUE À GORGE EN « O » ET UN ROULEMENT, SUPPORT INTERNE
(E) RODAMIENTO EXCLUSIVO CON RUEDA ROSCADA EN "O", SOPORTE INTERNO
(P) ROLAMENTO ÚNICO DE ROLDANA SULCADA EM "O", SUPORTE INTERNO
(I) RUOTA MONOCUSCINETTO CON SCANALATURA A "O", SOSTEGNO INTERNO
(CZ) KLADKA SPODNÍ POJEZDOVÁ „O“ PROFIL S VNITŘNÍ PODPĚROU, JEDNOLOŽISKOVÁ
(NL) "O" WIEL ENKELE LAGER, INTERNE STEUN
(DK) "O" HJUL MED RILLER ENKELT LEJE, INDVENDIGT BESLAG
(N) "O"-RILLEDE HJUL MED ENKELTLAGER, INNVENDIG STØTTE
(S) ENKELLAGRAT SPÄRHJUL MED "O" SPÄR, INTERNT STÖD
(FIN) "O"-URAINEN PYÖRÄ YKSITTÄISELLÄ LAAKERILLA, SISÄINEN TUKI
(RUS) РОЛИК НИЖНИЙ, ПРОФИЛЬ «О», С ВНУТРЕННИМ КРОНШТЕЙНОМ, ОДНОПОДШИПНИКОВЫЙ
(TR) "O" OLUKLU TEKERLEK, TEK RULMANLI, DAHİLİ DESTEK
(AR)  "O" 
(CHN) "O"型槽轮单轴承,内支架
(MAL) BEARING TUNGKAL RODA BERALUR "O", SOKONGAN DALAMAN
(H) O-HORNYOS GÖRGŐ EGY CSAPÁGGYAL, A GÖRGŐ A MEGTÁMASZTÁSBA SÜLLYED
(PL) ROLKA O PROFILU „O” Z POJEDYNCZYM ŁOŻYSKIEM, PODPARCIE WEWNĘTRZNE
(SK) KLADKA SPODNÁ POJAZDOVÁ „O” PROFIL S VNÚTORNOU PODPEROU, JEDNOLOŽISKOVÁ
(RO) ROATĂ FORMĂ „O” CU UN SINGUR LAGĂR, SUPORT INTERN
(HR) KOTAČ S „O” UTOROM I JEDNIM LEŽAJEM, UNUTARNJI DRŽAČ
(SLO) TEKALNO KOLO Z "O" UTOROM Z ENIM LEŽAJEM, NOTRANJJI PODPORNIK

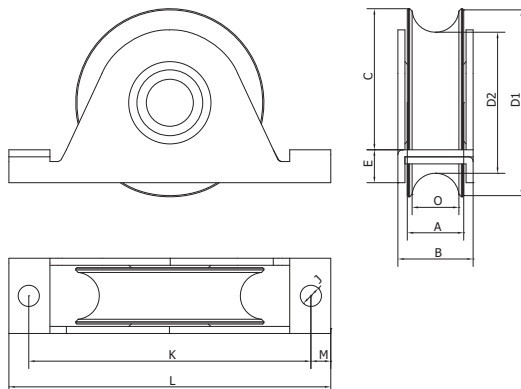

Art.	D1	D2	A	B	C	E	J	K	L	M	O	CAPACITY	1 pc		
	O		mm				O	mm			O	kg	kg	pcs	kg
WSO 824	80	59	24	31	59	18	9	125	155	15	21	300	0,85	12	10,2
WSO 924	90	69	24	31	64	18	9	125	155	15	21	300	1,04	12	12,48
WSO 1024	100	79	24	31	69	18	9	125	155	15	21	300	1,3	10	13



SEC.RU

ПОРТАЛ ПО БЕЗОПАСНОСТИ