





ISO 9001

Art. END S, M, L



- | | | | |
|------------|---------------------------------------|------------|---------------------------------------|
| GB | RUBBER END STOP WITH SCREW | RUS | ОГРАНИЧИТЕЛЬ ХОДА РЕЗИНОВЫЙ, С ВИНТОМ |
| D | GUMMIANSCHLAG MIT SCHRAUBE | TR | VİDALI LASTİK UÇ TESPİT PARÇASI |
| F | BUTÉE EN CAOUTCHOUC AVEC VIS | AR | محدد الحركة مع المطاط |
| E | TOPE FINAL DE GOMA CON TUERCA | CHN | 螺钉紧固橡胶终点挡块 |
| P | BATENTE DE BORRACHA COM PARAFUSO | MAL | PENYENDAL Hujung Getah Dengan Skru |
| I | FERMO DI FINE CORSA IN GOMMA CON VITE | H | GUMI ÜTKÖZŐ CSAVARRAL |
| CZ | DORAZ GUMOVÝ SE ŠROUBEM | PL | ODBOJNIK GUMOWY ZE ŚRUBĄ |
| NL | RUBBEREN EINDSTOP MET SCHROEF | SK | DORAZ GUMOVÝ SO SKRUTKOU |
| DK | GUMMIENDESTOP MED SKRUE | RO | OPRITOR CURSĂ DE CAUCIUC CU FILET |
| N | GUMMI ENDESTOPPER MED SKRUE | HR | GUMENI GRANIČNIK S VIJKOM |
| S | ÄNDSTOPP AV GUMMI MED SKRUV | SLO | GUMIJASTI ZAUSTAVLJALNIK Z VIJAKOM |
| FIN | KUMINEN PÄÄTYPYSÄYTIN RUUVILLA | | |

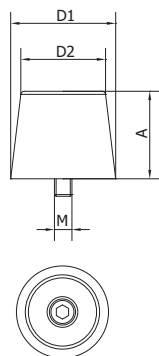

Art.	D1	D2	A	M	1pc			
	O		mm		kg	pcs	kg	
END S	29	22	12,5	M5	0,008	20	0,16	
END M	29	24	24,5	M6	0,02	20	0,4	
END L	39	34	39	M10	0,05	20	1	



SEC.RU

ПОРТАЛ ПО БЕЗОПАСНОСТИ