

[1] **EU-TYPE EXAMINATION CERTIFICATE**

[2] Equipment or protective system intended for use in potentially explosive atmospheres –
Directive 2014/34/EU

[3] EU-type examination certificate Number: **CETS 22 ATEX 017 X** Issue:0

[4] Product: **FLAME DETECTORS SPECTRON-601-EXD, SPECTRON-801-EXD,
SPECTRON-804-EXD, SPECTRON-901-EXD**

[5] Manufacturer: **SCIENTIFIC PRODUCTION ASSOCIATION SPECTRON
LIMITED LIABILITY COMPANY (SPA SPECTRON LLC)**

[6] Legal address: **620036, Yekaterinburg, st. Listvennaya, 61, Russia**

Actual address: **623700, Berezovsky, Sverdlovsk region, st. Lenina, 2D, Russia**

[7] This product any of acceptable variation thereto is specified in the schedule to this certificate
and the documents therein referred to.

[8] The Certification body SIA «CE-Test», notified body number 2861 in accordance with
Article 17 of the Directive 2014/34/EU of European Parliament and of the Council, dated 26
February 2014, certifies that this product has been found to comply with the Essential Health
and Safety Requirements relating to the design and construction of products intended for use in
potentially explosive atmospheres, given in Annex II to the Directive.

The examination and test results are recorded in confidential Evaluation report
number 017/2022 from 01.02.2022

[9] Compliance with Essential Health and Safety Requirements has been assured by
compliance with: EN IEC 60079-0:2018, EN 60079-1:2014, EN 60079-11: 2012.

[10] If the sign «X» is placed after the certificate number, it indicates that the product is subject to
Specified Conditions of Safe Use specified in the schedule to this certificate

[11] This EU-Type Examination Certificate relates only to the design and construction of the
specified product in accordance to the Directive 2014/34/EU. Further requirements of the
directive apply to the manufacturing process and supply of this product. These are not covered by
this certificate.

[12] The marking of the equipment or protective system shall include the following:



I M2 Ex db I Mb

II 2G Ex db IIB T6 Gb


II 2D Ex tb IIIC T85°C Db

Or

II 2G Ex db IIB T6 Gb

II 2D Ex tb IIIC T85°C Db

-55 °C ≤ Ta ≤ +85°C

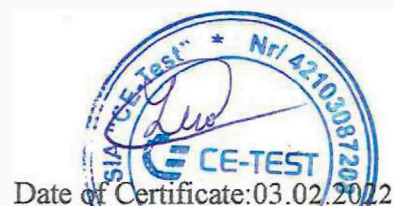

Date of Certificate: 03.02.2022

Responsible person: Ing. Pavlo Khorunzhyi
Head of certification body

Certificate without signature are void. This certificate may only be reproduced in its entirety
and without any change, schedule included.

Page 1 of 4 of certificate CETS 22 ATEX 017 X

[13] SCHEDULE

[14] EU-TYPE EXAMINATION CERTIFICATE: **CETS 22 ATEX 017 X** Issue: 0

[15] Description of Product

The detector is an automatic optoelectronic device that is designed to detect fires by infrared radiation of the flame, generate and transmit a signal to the equipment of technical means of warning, fire alarm and fire extinguishing control. Spectron flame detectors are explosion-proof devices, they have versions that differ in functionality, housing material, output signal type and explosion protection.

Different models differ from each other in size and equipment installed inside them.

Spectron ₁ XXX ₂ XXX ₃ X ₄

Spectron ₁ Equipment name

Modifications:

XXX ₂ Spectron -601-Exd, Spectron -801-Exd, Spectron -804-Exd, Spectron -901-Exd

XXX ₃ Type of protection of the flame retardant enclosure Exd

Body material:

X₄ A - aluminum alloy;
H - stainless steel;
M - galvanized carbon steel.

The cylindrical flameproof enclosure of the Spectron Flame Detector consists of a housing and two covers secured with screws. Inside the flameproof enclosure there is an electronic board and terminals for external connections. The board is installed inside the case and secured with screws. The front cover is fastened to the body with screws, light-transmitting elements are installed on the front cover from the inside, Spectron 601 has two, and Spectron 804, Spectron 901 - four light-transmitting elements. The back cover is fixed to the body with screws and provides a flameproof connection, there are two threaded holes on the back cover for attaching cable glands. Unused cable entry holes must be closed with Ex blanking plugs. Self-loosening of the screws securing the front and rear covers is prevented by the use of spring washers. Self-loosening of threaded connections of cable glands is prevented by using locknuts or sealing compound.

There are seals between the housing and the covers, providing IP 68 protection against external influences over the entire temperature range.

Table 1 - Technical characteristics of flame detectors Spectron.

Name of indicator, unit of measurement	Value
Supply voltage, V (direct current)	9..32
Ambient temperature range, °C	From -55 to +85 °C
Enclosure protection according to IEC 60529:2013	IP68

Certificate without signature are void. This certificate may only be reproduced in its entirety and without any change, schedule included.

For a more detailed description of the design, please refer to the respective instruction manual.

[16] Test Report

The examination and test results are recorded in confidential Evaluation Report number 017/2022 from 01.02.2022

[17] Specific conditions of use

Missing

[18] Essential health and safety requirements

The Essential Health and Safety Requirements (EHSRs) covered by the standards listed at item 9.

Additional information: None.

[19] Drawings and Documents

The documents are listed in the Evaluation report number 017/2022 from 01.02.2022

Title Technical Documents	Decimal number	Date
Operation Manual UV/IR MULTI RATIO FLAME-FIRE DETECTOR IP329/330-5-1 "Spectron" "Spectron-601-Exd-A" "Spectron-601-Exd-M" "Spectron-601-Exd-N"	SPEC. 420529.000.001-31 OM	2022
Safety drawing Spectron-601-Exd-A	SPEC.425248.660.000-01 SD	04.2017
Assembly drawing Spectron-601-Exd-A-V(-IP), Spectron-601-Exd-A-V(-IP)-HART, Spectron-601-Exd-A(-HART), Spectron-501-Exd-A	SPEC.425248.660.000-02 AD	04.2018
Specification Spectron-601-Exd-A-V(-IP), Spectron-601-Exd-A-V(-IP)-HART, Spectron-601-Exd-A(-HART), Spectron-501-Exd-A	SPEC.425248.660.000-02 SP	08.2018
Safety drawing Spectron-601-Exd-N(M)	SPEC.425248.660.000-02 SD	04.2017
Assembly drawing Spectron-601-Exd-N(I), Spectron-601-Exd-N-V(-IP), Spectron-601-Exd-N-V(-IP)-HART, Spectron-601-Exd-N(M)(-HART), Spectron-501-Exd-N(M)	SPEC.425248.620.000 AD	10.2019
Specification Spectron-601-Exd-N(M), Spectron-601-Exd-N-V(-IP), Spectron-601-Exd-N-V(-IP)-HART, Spectron-601-Exd-N(M)(-HART), Spectron-501-Exd-N(M)	SPEC.425248.620.000 SP	05.2019
Operation Manual FIRE ALARM FLAME DETECTOR IP330-2-1 "Spectron" "Spectron-801-Exd-A" "Spectron-801-Exd-M"	SPEC.420529.000.001-32 OM	2022

Certificate without signature are void. This certificate may only be reproduced in its entirety and without any change, schedule included.

Page 3 of 4 of certificate CETS 22 ATEX 017 X

Spectron-801-Exd-N		
Assembly drawing Spectron-801-Exd-A, Spectron-801-Exd-A-HART, Spectron-701-Exd-A	SPEC.425241.400.000-01 AD	07.2019
Specification Spectron-801-Exd-A, Spectron-801-Exd-A-HART, Spectron-701-Exd-A	SPEC.425241.400.000-01 SP	04.2018
Operation Manual FIRE ALARM FLAME DETECTOR IP330-3-1 "Spectron" "Spectron-804-Exd-A" "Spectron-804-Exd-M" "Spectron-804-Exd-N"	SPEC.420529.000.001-33 OM	01.2022
Operation Manual FIRE ALARM FLAME DETECTOR IP 329/330-6-1 "Spectron" "Spectron-901-Exd-A" "Spectron-901-Exd-M" "Spectron-901-Exd-N"	SPEC.420529.000.001-34 OM	01.2022
Assembly Drawing Spectron-804-Exd-A-HART, Spectron-804-Exd-A Spectron-901-Exd-A-V(-IP)-HART, Spectron-901-Exd-A-HART, Spectron-901-Exd-A, Spectron-804-Exd-A-V(-IP)-HART	SPEC.425241.910.000 AD	09.2021
Specification Spectron-804-Exd-A-HART, Spectron-804-Exd-A, Spectron-901-Exd-A-B(-IP)-HART, Spectron-901-Exd-A-HART, Spectron-901-Exd-A, Spectron-804-Exd-A-B(-IP)-HART	SPEC.425241.910.000 SP	09.2021
Safety drawing Spectron-801-Exd-A, Spectron-804-Exd-A, Spectron-901-Exd-A	SPEC.425241.400.000-01 SD	09.2019
Assembly Drawing Spectron-801-Exd-N(M), Spectron-801-Exd-N(M)-HART, Spectron-701-Exd-N(M)	SPEC.425241.400.000-02 AD	05.2019
Specification Spectron-801-Exd-N(M) Spectron-801-Exd-N(M)-HART, Spectron-701-Exd-N(M)	SPEC.425241.400.000-02 SP	05.2019
Assembly Drawing Spectron-804-Exd-M/N Spectron-901-EXD-M/N	SPEC.425241.800.000 AD	09.2021
Specification Spectron-804-Exd-M/N Spectron-901-EXD-M/N	SPEC.425241.800.000 SP	09.2021
Safety drawing Spectron-801-Exd-N(M), Spectron-804-Exd-N(M), Spectron-901-Exd-N(M)	SPEC.425241.400.000-02 SD	09.2019

Certificate without signature are void. This certificate may only be reproduced in its entirety and without any change, schedule included.

Page 4 of 4 of certificate CETS 22 ATEX 017 X