

Рисунок 11 – Подготовка к регулировке уставок расцепителя защиты

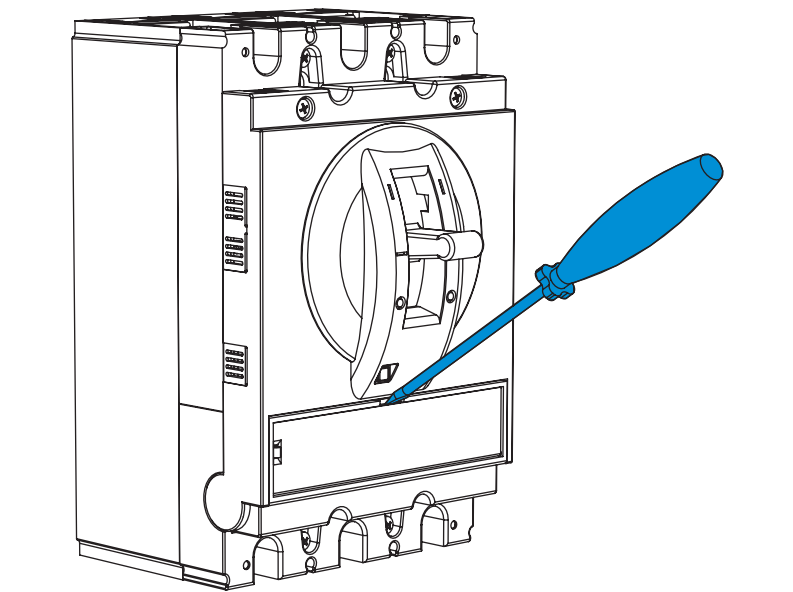


Рисунок 12 – Регулировка уставок термомангнитного расцепителя защиты

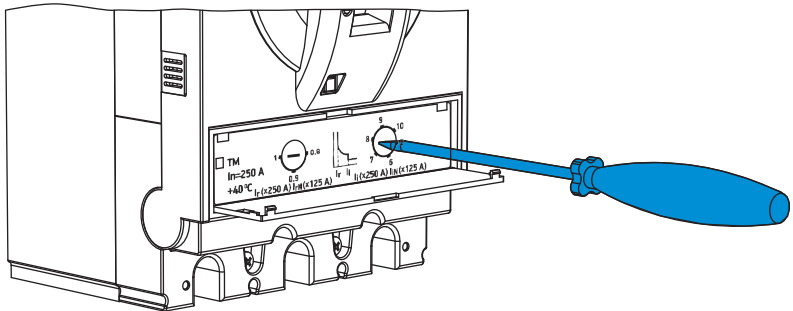


Рисунок 13 – Регулировка уставок электронного расцепителя защиты


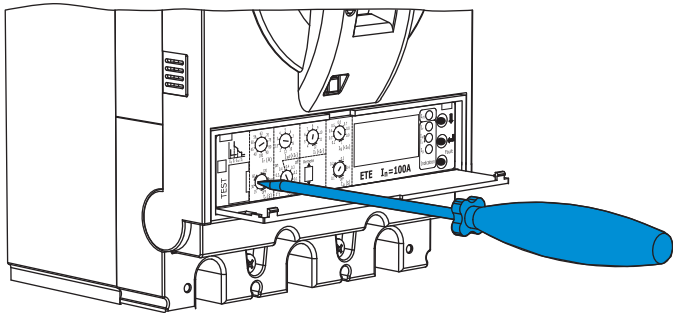


Рисунок 14 – Регулировка уставок блока защиты от токов утечки



QR код руководства по эксплуатации OptiMat T

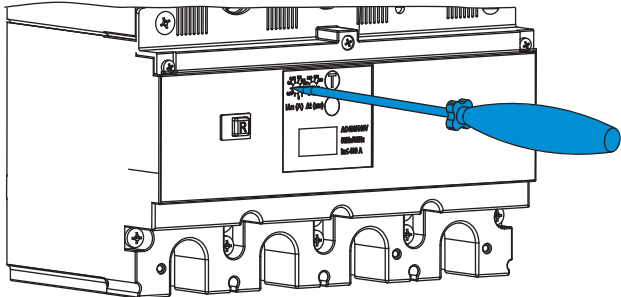

TM, TM-M, M, M-M,
версия SD, версия HV



ETN, ETN-M, ETA, ETA-M,
ETA-COM, ETA-M-COM,
ETE, ETE-M

Выключатели автоматические OptiMat T250, OptiMat T250-RC

OPTIMA
KEAZ

ЕАС

M8: 8,8-10,8 H-M

Technical drawings of the 1000V 100A circuit breaker, showing front, side, and top views with dimensions in mm.

Front View (Left): Shows the main body with a width of 105 mm and a height of 265 mm. The mounting bracket has a width of 147 mm and a height of 165 mm. The terminal spacing is 35 mm. The maximum terminal height is 22 mm, and the maximum terminal width is 21.5 mm. The mounting hole is M8. The bottom terminal spacing is 35 mm.

Side View (Middle): Shows the side profile with a width of 140 mm and a height of 130 mm. The mounting bracket has a width of 69 mm and a height of 118 mm. The maximum terminal height is 6 mm, and the maximum terminal width is 22 ± 1 mm.

Top View (Right): Shows the top of the unit with a width of 340 mm and a height of 240 mm. The mounting bracket has a width of 85.8 mm and a height of 130 mm. The terminal spacing is 35 mm. The maximum terminal height is 22 mm, and the maximum terminal width is 21.5 mm. The mounting hole is M8. The bottom terminal spacing is 35 mm.

The technical drawing consists of two parts. On the left is a perspective view of a book cover. It features a central rectangular panel with a black border containing a stylized illustration of a sailboat on water. Above this panel is a small, light-colored rectangular label. The cover has a thick spine on the left and rounded corners. On the right is a top-down view of the cover, showing its rectangular shape with wavy, decorative edges. This view includes a grid of lines and two dimension lines: a horizontal one at the top labeled '105' and a vertical one on the left labeled '110'.

Наименование	Количество 3Р	Количество 4Р
Автоматический выключатель	1 шт	1 шт
Винт М8	6 шт	8 шт
Шайба М8	6 шт	8 шт
Пружинная шайба М8	6 шт	8 шт
Винтовое соединение М4	4 шт	4 шт
Гайка М4	4 шт	4 шт
Межполюсные перегородки	4 шт	6 шт
Разъем с клеммником (расцепители: ЕТА-СОН, ЕТА-М-СОН, ЕТЕ, ЕТЕ-М)	1 шт	1 шт
Маркировка для привода моторного ЕSМO	1 шт	1 шт

Тип	А	Б	В	Г
OptiMat T250 3p	35	–	4-ø4,5 или M4	130
OptiMat T250 4p	35	70	4-ø4,5 или M4	130
OptiMat T250-RC	35	70	4-ø4,5 или M4	205