

USER'S MANUAL

16-Port 10/100TX 802.3at PoE +
2-Port Gigabit TP/SFP Combo
Web Smart Ethernet Switch

► STW-1622HP

Trademarks

Copyright © BEWARD Co., Ltd. 2021.

Contents are subject to revision without prior notice.

BEWARD is a registered trademark of BEWARD Co., Ltd. All other trademarks belong to their respective owners.

Disclaimer

BEWARD does not warrant that the hardware will work properly in all environments and applications, and makes no warranty and representation, either implied or expressed, with respect to the quality, performance, merchantability, or fitness for a particular purpose. BEWARD has made every effort to ensure that this User's Manual is accurate; BEWARD disclaims liability for any inaccuracies or omissions that may have occurred.

Information in this User's Manual is subject to change without notice and does not represent a commitment on the part of BEWARD. BEWARD assumes no responsibility for any inaccuracies that may be contained in this User's Manual. BEWARD makes no commitment to update or keep current the information in this User's Manual, and reserves the right to make improvements to this User's Manual and/or to the products described in this User's Manual, at any time without notice.

If you find information in this manual that is incorrect, misleading, or incomplete, we would appreciate your comments and suggestions.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the Instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

CE Mark Warning

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

Energy Saving Note of the Device

This power required device does not support Standby mode operation. For energy saving, please remove the power cable to disconnect the device from the power circuit. In view of saving the energy and reducing the unnecessary power consumption, it is strongly suggested to remove the power connection for the device if this device is not intended to be active.

WEEE Warning



To avoid the potential effects on the environment and human health as a result of the presence of hazardous substances in electrical and electronic equipment, end users of electrical and electronic equipment should understand the meaning of the crossed-out wheeled bin symbol. Do not dispose of WEEE as unsorted municipal waste and have to collect such WEEE separately.

TABLE OF CONTENTS

1. INTRODUCTION	8
1.1 Packet Contents	8
1.2 Product Description	9
1.3 How to Use This Manual	12
1.4 Product Features	13
1.5 Product Specification	16
2. INSTALLATION	19
2.1 Hardware Description	19
2.1.1 Switch Front Panel	19
2.1.2 LED Indications	19
2.1.3 Switch Rear Panel	21
2.2 Install the Switch	22
2.2.1 Desktop Installation	22
2.2.2 Rack Mounting	23
2.2.3 Installing the SFP Transceiver	24
3. SWITCH MANAGEMENT	26
3.1 Requirements	26
3.2 Management Access Overview	27
3.3 Web Management	28
3.4 SNMP-Based Network Management	29
3.5 BEWARD Smart Discovery Utility	30
4. WEB CONFIGURATION	32
4.1 Main Web Page	35
4.2 System	39
4.2.1 System Information	40
4.2.2 User Configuration	41
4.2.3 IP Configuration	42
4.2.3.1 IPv4	42

4.2.3.2 IPv6	42
4.2.4 SNMP Settings	43
4.2.4.1 SNMP View Table	45
4.2.4.2 SNMP Group Table	46
4.2.4.3 SNMP User Table	47
4.2.4.4 SNMP Community Table	48
4.2.4.5 SNMP Host Table	49
4.2.4.6 SNMP Configuration	50
4.2.5 NTP Settings	51
4.2.6 Syslog Settings	52
4.2.7 Factory Default	53
4.2.8 Configuration	54
4.2.8.1 Backup	54
4.2.8.2 Restoration	54
4.2.9 Firmware Update	55
4.3 PoE Configuration	56
4.3.1 PoE Chip Information	57
4.3.2 PoE Port Settings	58
4.3.3 PoE Alive Check	59
4.3.4 PoE Port Sequential	60
4.3.5 PoE Schedule	61
4.4 Basic Configuration	63
4.4.1 Port Configuration	64
4.4.2 Port Mirroring	66
4.4.3 Broadcast Storm Control	68
4.4.4 Bandwidth Control	70
4.5 VLAN Configuration	71
4.5.1 VLAN Overview	71
4.5.2 IEEE 802.1Q VLAN	72
4.5.3 VLAN Mode	76
4.5.4 VLAN Group-based Entry Config	78
4.5.5 VLAN Tag-based Entry Config	79
4.5.6 VLAN Port Config	82
4.5.7 Protocol VLAN Config	85
4.5.8 Q-in-Q Port Config	86
4.5.9 Q-in-Q Index Config	89
4.6 QoS Configuration	91
4.6.1 Understanding QoS	91

4.6.2 QoS Group Member	93
4.6.3 QoS Mode Set	94
4.6.4 QoS Out Queue Aging	95
4.6.5 QoS Remap	96
4.6.6 Class of Service	97
4.6.7 802.1p-based QoS	98
4.6.8 DSCP-based Priority	99
4.6.9 TCP/UDP Port-based QoS	100
4.7 ACL Configuration	101
4.7.1 Understanding ACL	101
4.7.2 ACL Profile List	101
4.7.2.1 MAC	103
4.7.2.2 IP	104
4.7.2.3 IP_EXT	105
4.7.2.4 IPv6	107
4.7.2.5 Advanced	108
4.7.3 ACL Ctag Settings	110
4.7.4 ACL Stag Settings	111
4.7.5 ACL VLAN Settings	112
4.7.6 ACL Bandwidth Settings	113
4.7.7 ACL DSCP Settings	114
4.8 Security	115
4.8.1 Access Security	116
4.8.2 Port-MAC-IP Binding	117
4.8.2.1 Port-MAC-IP Port Setting	117
4.8.2.2 Port-MAC-IP Entry Setting	119
4.8.2.3 DHCP Snooping Entry Setting	121
4.8.3 MAC Address Binding	122
4.9 Advanced Features	125
4.9.1 Spanning Tree Protocol	126
4.9.1.1 STP Global Settings	133
4.9.1.2 STP Port Settings	134
4.9.1.3 MST Configuration Identification	136
4.9.1.4 STP Instance Settings	137
4.9.1.5 MSTP Port Information	138
4.9.1.6 STP Loop Detect Settings	139
4.9.2 Trunk & Link Aggregation	140
4.9.3 IGMP Snooping	143

4.9.3.1 IGMP Snooping Settings	147
4.9.3.2 IGMP Snooping Router Ports Settings	148
4.9.3.3 IGMP Snooping Groups	149
4.9.3.4 IGMP Snooping Ports	150
4.9.4 MLD Snooping	151
4.9.4.1 MLD Snooping Settings	151
4.9.4.2 MLD Snooping Router Ports Settings	152
4.9.4.3 MLD Snooping Groups	153
4.9.4.4 MLD Snooping Ports	154
4.9.5 DHCP Relay Agent	155
4.9.6 Loop Detect	157
4.9.7 GVRP	159
4.9.8 Neighbor MAC ID Settings	160
4.9.9 Voice VLAN Setting	161
4.9.9.1 Voice VLAN State	161
4.9.9.2 Voice VLAN Port Setting	162
4.9.9.3 OUI List	163
4.9.10 LLDP	164
4.9.10.1 LLDP Global Setting	164
4.9.10.2 LLDP Port Setting	166
4.10 Monitoring	168
4.10.1 MIB Counter	169
4.10.2 Scan MAC ID Lookup Table	172
4.10.3 LLDP Remote MIB	173
4.10.4 Syslog	174
4.10.5 CPU Resource Utilization	175
5. SWITCH OPERATION	176
5.1 Address Table	176
5.2 Learning	176
5.3 Forwarding & Filtering	176
5.4 Store-and-Forward	176
5.5 Auto-Negotiation	177
6. Power over Ethernet Overview	178
7. TROUBLESHOOTING	180

APPENDEX A: Networking Connection.....	182
A.1 PoE RJ45 Port Pin Assignments.....	182
A.2 Switch's Data RJ45 Pin Assignments -- 1000Mbps, 1000BASE-T	182
A.3 10/100Mbps, 10/100BASE-TX	182
APPENDIX B: GLOSSARY	184

1. INTRODUCTION

Thank you for purchasing BEWARD Web Smart Ethernet Switch, STW-1622HP mentioned in this Manual refers to STW-1622HP.

STW-1622HP

16-Port 10/100TX 802.3at PoE + 2-Port Gigabit TP/SFP Combo WEB Smart Ethernet Switch

1.1 Packet Contents

Open the box of the Managed PoE Switch and carefully unpack it. The box should contain the following items:

☒ PoE Web Smart Switch	x 1
☒ Quick Installation Guide	x 1
☒ SFP Dust CAP	x 2
☒ Rubber Feet	x 4
☒ Rack Mount Accessory Kit	x 1
☒ Power Cord	x 1

If any of these are missing or damaged, please contact your local reseller for replacement.

1.2 Product Description

BEWARD has released the new version of the STW-1622HP, the layer 2 Web Smart Switch series with PoE injector function built in. is designed for enterprises and industries where a network of PDs can be centrally managed. The Switch's management functions have been enhanced to include intelligent PoE management, IPv6 management, ACL, GVRP, and more.

Cost-optimized Web Smart Switch with L2/L4 Switching and Security


BEWARD Web Smart Switch series is an ideal model which provides cost-effective advantage to local area network and is widely accepted in the SMB office network. It offers **intelligent Layer 2 data packet switching and management functions**, **user-friendly web user interface** and **stable operation**. The Web Smart Switch series complies with **IEEE 802.3at Power over Ethernet Plus (PoE+)** at an affordable price; the Web Smart Switch series is equipped with **8/16/24/100BASE-TX** Fast Ethernet ports and **2 Gigabit TP/SFP combo** interfaces with inner power system. With its **8/16/24** Fast Ethernet ports integrated with 802.3at PoE+ injector function and total power budget of up to **420 watts**, it offers a rack-mountable, affordable, safe and reliable power solution for SMBs deploying Power over Ethernet networks, or requiring enhanced data security and network traffic management.

Intelligent LED Indicator for Real-time PoE Usage

The Web Smart Switch helps users to monitor the current status of PoE power usage easily and efficiently with its advanced LED indication. Called "**PoE Power Usage**" found on the front panel of the STW-1622HP Web Smart Switch, it has four orange LEDs indicating the range of the current PoE power usage.

Solution for IPv6 Networking

With the support for IPv6/IPv4 protocol, and easy and user-friendly management interfaces, the Web Smart Switch is the ideal choice for IP surveillance, VoIP and wireless service providers to connect with the IPv6 network. It also helps SMBs to step in the IPv6 era with the lowest investment and without having to replace the network facilities even though ISPs establish the IPv6 FTTx edge network.

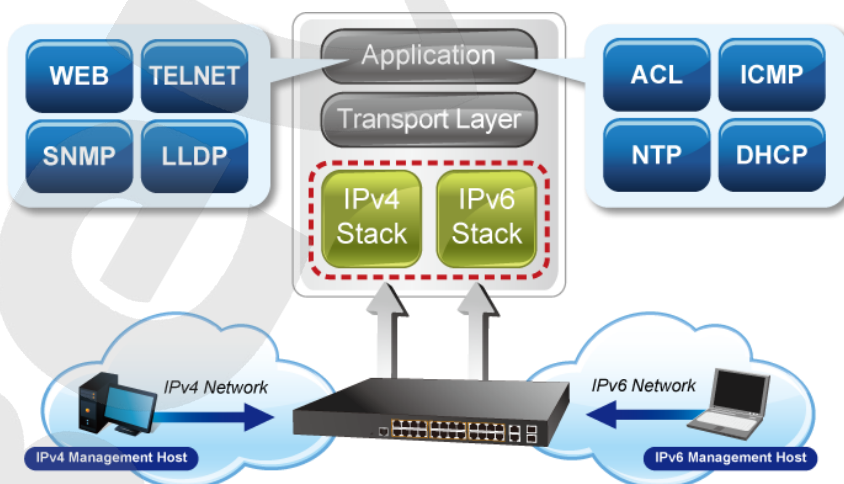


Built-in Unique PoE Functions for Surveillance Management

As the Web Smart Switch for surveillance network, it features the following intelligent PoE management functions:

- Real-time Display of PoE Chipset Temperature
- PD Alive Check
- PoE Port Sequence
- PoE Schedule


Intelligent Powered Device Alive Check

The Web Smart Switch can be configured to monitor a connected PD status in real time via ping action. Once the PD stops working and it is without response, the Web Smart Switch will resume the PoE port power and bring the PD back to work. It will greatly enhance the network reliability through the PoE port resetting the PD's power source, thus reducing administrator management burden.

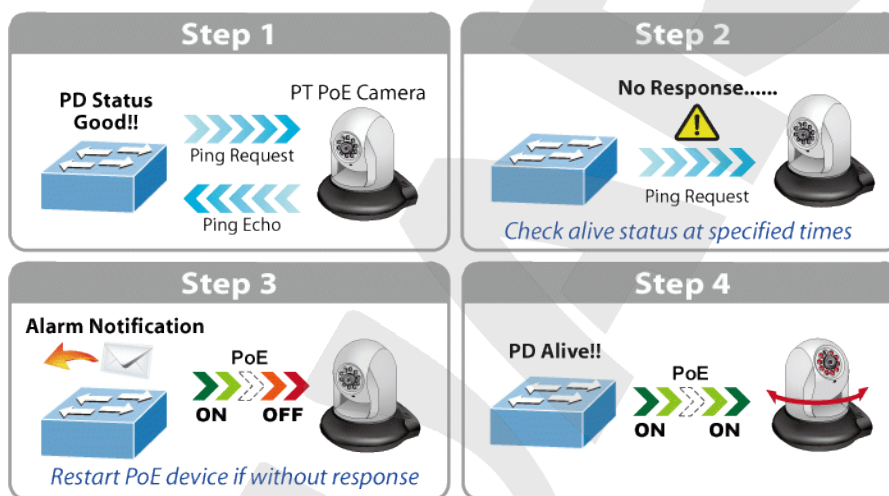

PoE Schedule for Energy Saving

Besides being used for IP surveillance, the Web Smart Switch is certainly applicable to build any PoE network including VoIP and wireless LAN. Under the trend of energy saving worldwide and contributing to the environmental protection on the Earth, the Web Smart Switch can effectively control the power supply besides its capability of giving high watts power. The "PoE schedule" function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs and enterprises save energy and budget.

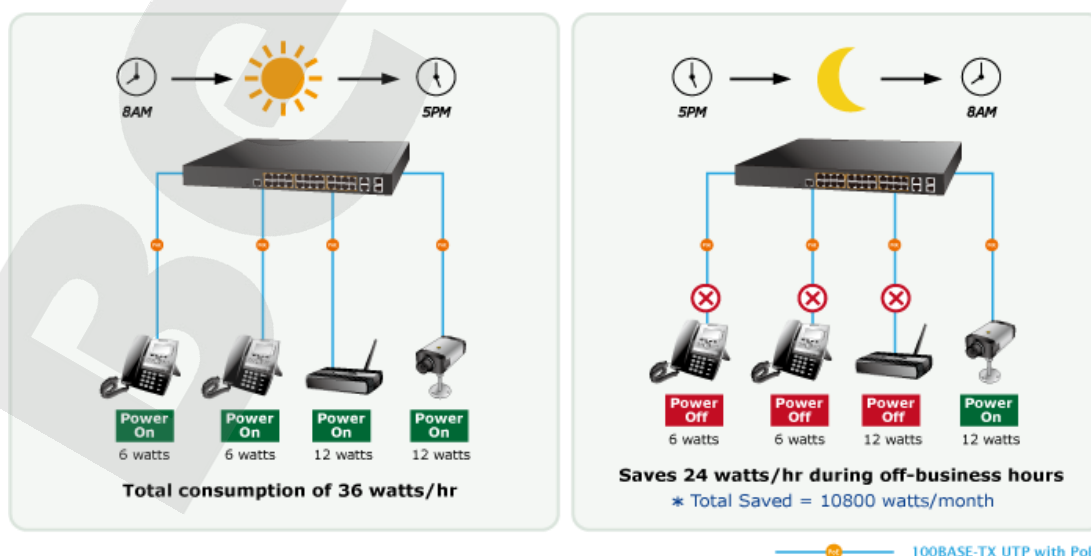


PoE Port Sequence

To prevent all the PoE ports of the Web Smart Switch from being active at the same time when the Switch has booted up, the PoE ports of the Web Smart Switch can be configured to allow each port to be activated at an interval time. In addition, the “Delay” setting is to delay power feeding on each port when the Web Smart Switch has completely booted up.

Robust Layer 2 Features

The Web Smart Switch can be programmed for advanced switch management functions, such as **Multiple Spanning Tree Protocol (MSTP)**, BPDU filtering, BPDU Guard, dynamic port link aggregation, **IGMP/MLD snooping**, DHCP relay agent, loop detection and **GVRP**, voice VLAN and the **Link Layer Discovery Protocol (LLDP)**. The Layer 2 protocol included is to help discover basic information about neighboring devices in the local broadcast domain. Other features included are the port-based/802.1Q VLAN and Q-in-Q VLAN, Layer 2/4 QoS, port mirroring, broadcast storm control and bandwidth control.

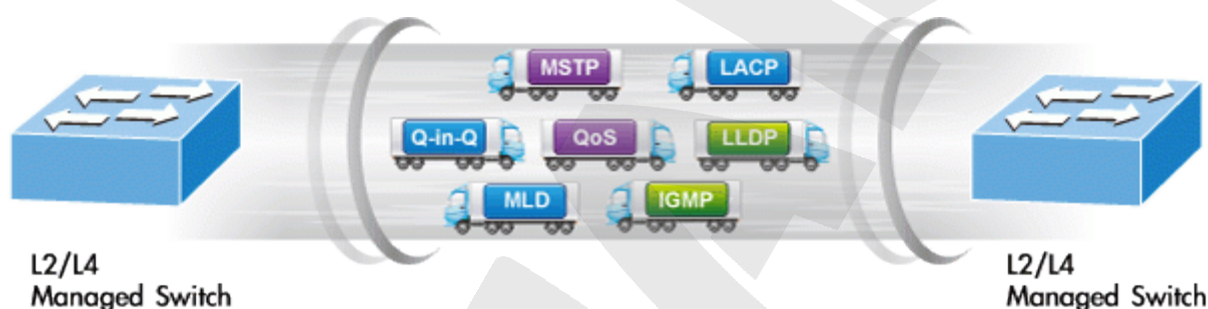

Enhanced Security and Traffic Control

The Web Smart Switch offers the comprehensive **Layer 2 to Layer 4 access control list (ACL)** for enforcing security to the edge. It can be used to restrict network access by denying packets based on source and destination IP/MAC address or defined typical network applications. The Web Smart Switch also provides **DHCP Snooping**, **ARP Inspection** and **MAC Verification** functions to prevent IP snooping from attack and discard ARP packets with invalid MAC address. Also included are per port MAC/IP address binding and MAC address binding. The network administrator can now build highly-secure corporate networks with considerably less time and effort than before.

Cybersecurity Network Solution to Minimize Security Risks

The cybersecurity features that virtually need no effort and cost to have included the protection of the switch management and the enhanced security of the mission-critical network. Both SSH and SSL protocols are utilized to provide strong protection against advanced threats. The network administrator can now construct highly-secure corporate networks with considerably less time and effort than before.

Efficient Management

For efficient management, the Web Smart Switch is equipped with **Web**, and **SNMP** management interfaces. With the built-in Web-based management interface, the Web Smart Switch offers an easy-to-use, platform-independent management and configuration facility. By supporting the standard Simple Network Management Protocol (SNMP), the Web Smart Switch can be managed via any standard management software. Moreover, the Web Smart Switch offers secure remote management by supporting **SNMPv3** connections which encrypt the packet content at each session.

Flexible and Extendable Uplink Solution

The Web Smart Switch provides **2 extra Gigabit TP/SFP combo** interfaces supporting **10/100/1000BASE-T** RJ45 copper to connect with surveillance network devices such as **NVR**, **Video Streaming Server** or **NAS** to facilitate surveillance management. Or through these fiber SFP slots occupied by the **1000BASE-SX/LX** SFP (small form-factor pluggable) fiber transceivers, it can be uplinked to a backbone switch and monitoring center in long distance. The distance can be extended from 550 meters to 2km (multi-mode fiber) to 10/20/40/80/120 kilometers (single-mode fiber or WDM fiber). They are well-suited for applications within the industrial data centers and distributions.

1.3 How to Use This Manual

This User's Manual is structured as follows:

Section 2, INSTALLATION

The section explains the functions of the Web Smart Switch and how to physically install the Web Smart Switch.

Section 3, SWITCH MANAGEMENT

The section contains the information about the software function of the Web Smart Switch.

Section 4, WEB CONFIGURATION

The section explains how to manage the Web Smart Switch by Web interface.

Section 5, COMMAND LINE INTERFACE

The section describes how to use the Command Line interface (CLI).

Section 6, CLI CONFIGURATION

The section explains how to manage the Web Smart Switch by Command Line interface.

Section 7, SWITCH OPERATION

The chapter explains how to do the switch operation of the Web Smart Switch.

Section 8, POWER over ETHERNET OVERVIEW

The chapter introduces the IEEE 802.3af / 802.3at PoE standard and PoE provision of the Web Smart Switch.

Section 9, TROUBLESHOOTING

The chapter explains how to do troubleshooting of the Web Smart Switch.

Appendix A

The section contains cable information of the Web Smart Switch.

1.4 Product Features

► Physical Port

- **8/16/24 10/100BASE-TX** RJ45 copper ports with **IEEE 802.3at/af PoE+** injector function
- **2 10/100/1000BASE-T** Gigabit RJ45 copper ports (Combo Interface)
- **2 1000BASE-X mini-GBIC/SFP slots** (Combo Interface)
- Reset button for system factory default

► Switching

- Hardware-based 10/100Mbps, half/full duplex and 1000Mbps full duplex mode, flow control and auto-negotiation, and auto MDI/MDI-X
- Features Store-and-Forward mode with wire-speed filtering and forwarding rates
- IEEE 802.3x flow control for full duplex operation and back pressure for half duplex operation
- Automatic address learning and address aging
- Supports CSMA/CD protocol

► Power over Ethernet

- Complies with IEEE 802.3at High Power over Ethernet End-Span PSE
- Complies with IEEE 802.3af Power over Ethernet End-Span PSE
- Up to 16 ports of IEEE 802.3af/802.3at devices powered
- Supports PoE Power up to 36 watts for each PoE port
- 50/100/150/190-watt PoE budget
- Auto detects powered device (PD)
- Circuit protection prevents power interference between ports
- Remote power feeding up to 100m
- PoE Management
 - Per port PoE function enable/disable
 - Per Port PoE operation mode selection
 - Per PoE port power budget control
 - PD classification detection and PoE consumption usage status
- Intelligent PoE features –PoE Power sequential
 - PoE schedule
 - Real-time display of PoE chipset temperature
 - PD alive check
 - PoE port sequence
 - PoE schedule

► Layer 2 Features

- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)
- High performance Store and Forward architecture, runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Supports **VLAN**
 - Port-based VLAN, up to 10/18/26 VLAN groups

- IEEE 802.1Q tagged VLAN
- Protocol VLAN
- Provider Bridging (VLAN Q-in-Q) support (IEEE 802.1ad)
- GVRP
- Voice VLAN

■ Supports **Spanning Tree Protocol**

- STP (IEEE 802.1D Spanning Tree Protocol)
- RSTP (IEEE 802.1w Rapid Spanning Tree Protocol)
- MSTP (IEEE 802.1s Multiple Spanning Tree Protocol)
- STP BPDU filtering, BPDU Guard

■ Supports **Link Aggregation**

- IEEE 802.3ad Link Aggregation Control Protocol (LACP)
- 1 LACP group, up to 2 ports per LACP group
- Cisco ether-channel (static trunk)
- 1 trunk group, up to 2 ports per trunk group

■ Provides port mirror (many-to-1)

■ Loop detection

► **Quality of Service**

- Ingress/Egress Rate Limit per port bandwidth control
- Storm Control support
 - Broadcast/ Multicast /DLF (Destination Lookup Fail)/ARP/ICMP
- Traffic classification
 - IEEE 802.1p QoS/CoS
 - TCP/UDP/DSCP/IP precedence of IPv4/IPv6 packets
- Strict priority and Weighted Round Robin (WRR) CoS policies

► **Multicast**

- Supports IPv4 IGMP snooping v1/ v2 and v3
- Supports IPv6 MLD snooping v1, v2

► **Security**

- Access Control List
 - IPv4/IPv6 IP-based ACL
 - MAC-based ACL
- Port-MAC-IP Address Binding
 - Port-MAC-IP Port Setting
 - Port-MAC-IP Entry Setting
- MAC Address Binding
 - Static MAC
 - MAC Filtering
- DHCP snooping to filter distrusted DHCP messages
- ARP Inspection discards ARP packets with invalid MAC address to IP address binding

► **Management**

- IPv4 and IPv6 dual stack management
- Switch management interface
 - Web switch management
 - SNMP v1, v2c and v3
- BOOTP and DHCP for IP address assignment
- System maintenance
 - Firmware upgrade via HTTP
 - Configuration upload/download through web interface
 - Hardware-based reset button for system reset to factory default
- SNTP Network Time Protocol
- Link Layer Discovery Protocol (LLDP)
- Event message logging to remote syslog server
- BEWARD Smart Discovery utility

1.5 Product Specification

Product	STW-1622HP
Hardware Specifications	
Copper Ports	24 10/100BASE-TX RJ45 Auto-MDI/MDI-X ports
Gigabit Copper Ports	2 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
SFP/mini-GBIC Slots	2 1000BASE-X SFP interfaces, shared with Port-17 to Port-18
Switch Architecture	Store-and-Forward
Switch Fabric	8.8Gbps/non-blocking
Switch Throughput@64bytes	5.35Mpps @64bytes
MAC Address Table	16K entries with auto-refresh function
Shared Data Buffer	2,75 Mb
Flow Control	IEEE 802.3x pause frame for full duplex Back pressure for half duplex
Maximum Transmit Unit	1522 bytes
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
LED	System: Power (Green) 10/100BASE-TX RJ45 Interfaces (Port 1 to Port 16): 10/100 LNK/ACT (Green), PoE-in-Use (Orange) 10/100/1000BASE-T RJ45 / SFP Interfaces (Port 17 to Port 18): 1000 LNK/ACT (Green) 100/1000 (Green) PoE Usage: 50W, 100W, 150W, 190W (Orange)
Power Requirements	100~240V AC, 50/60Hz, 4A (max.)
Power Consumption/Dissipation	Max.250 watts/816BTU
Dimensions (W x D x H)	440 x 200 x 44,5 mm, 1U height
Weight	2.55 kg
ESD Protection	2KV DC
Power over Ethernet	
PoE Standard	IEEE 802.3af PoE / PSE IEEE 802.3at PoE / PSE
PoE Power Output	Per Port 56 DC, Max. 30.8 watts
PoE Power Supply Type	End-span
Power Pin Assignment	1/2(+), 3/6 (-)
PoE Power Budget	220 watts
Number of PDs, 7 watts	16
Number of PDs, 15.4 watts	12
Number of PDs, 30 watts	7
Layer 2 Functions	
Port Mirroring	TX/RX/both Many-to-1 monitor

VLAN	802.1Q tagged-based VLAN, up to 30 VLAN groups, out of 4094 VLAN IDs Port-based VLAN, up to 18 VLAN groups MTU VLAN
Link Aggregation	1 group of 2-Port 10/100/1000BASE-T trunk supported
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) STP BPDU filtering, BPDU Guard
IGMP Snooping	IPv4 IGMP snooping v1/ v2
Access Control List	IPv4/IPv6 IP-based ACL MAC-based ACL
QoS	Allow to assign low / high priority on each port First-In-First-Out, All-High-before-Low, Weight-Round-Robin QoS policy
Security	Access Control List – IPv4/IPv6 IP-based ACL – MAC-based ACL Storm Control DHCP snooping to filter distrusted DHCP messages ARP Inspection discards ARP packets with invalid MAC address to IP address binding
Management Functions	
Basic Management Interfaces	IPv4 and IPv6 dual stack management Switch management interface - Web switch management - SNMP v1, v2c and v3 BOOTP and DHCP for IP address assignment System maintenance - Firmware upgrade via HTTP - Configuration upload/download through web interface - Hardware-based reset button for system reset to factory default SNTP Network Time Protocol Link Layer Discovery Protocol (LLDP) Event message logging to remote Syslog server BEWARD smart discovery utility
Secure Management Interfaces	SNMP v3
Standards Conformance	
Regulatory Compliance	FCC Part 15 Class A, CE
Standards Compliance	IEEE 802.3 Ethernet IEEE 802.3u Fast Ethernet IEEE 802.3ab Gigabit Ethernet IEEE 802.3z Gigabit Ethernet IEEE 802.3x Full-duplex flow control IEEE 802.1Q VLAN IEEE 802.1p QoS IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.3af Power over Ethernet

		IEEE 802.3at Power over Ethernet Plus
Cable	Twisted-Pair	10BASE-T: 2-Pair UTP CAT. 3, 4, 5, up to 100 meters 100BASE-TX: 2-Pair UTP CAT. 5, 5e up to 100 meters 1000BASE-T: 4-Pair UTP CAT. 5e, 6 up to 100 meters
	Fiber-Optic	1000BASE-SX : 50/125µm or 62.5/125µm multi-mode fiber optic cable, up to 550m (varying on SFP module) 1000BASE-LX : 9/125µm single-mode fiber optic cable, up to 10/20/30/40/50/70/120 kilometers (depending on the SFP module)
Environment		
Operating		Temperature: 0 ~ 50 degrees C Relative Humidity: 5 ~ 95% (non-condensing)
Storage		Temperature: -10 ~ 70 degrees C Relative Humidity: 5 ~ 95% (non-condensing)

2. INSTALLATION

This section describes the hardware features and installation of the Web Smart Switch on the desktop or rack mount. For easier management and control of the Web Smart Switch, familiarize yourself with its display indicators, and ports. Front panel illustrations in this chapter display the unit LED indicators. Before connecting any network device to the Web Smart Switch, please read this chapter completely.

2.1 Hardware Description

2.1.1 Switch Front Panel

The front panel provides a simple interface monitoring the Web Smart Switch. Figure 2-1 shows the front panel of the Web Smart Switch.

STW-1622HP Front Panel



Figure 2-1: Front Panels of Web Smart Switch Series Model

■ Fast Ethernet TP interface

10/100BASE-TX Copper, RJ45 Twist-Pair: Up to 100 meters.

■ Gigabit TP interface

Port-17, Port-18: 10/100/1000BASE-T Copper, RJ45 Twist-Pair: Up to 100 meters.

■ SFP slots

Port-17, Port-18: 1000BASE-X mini-GBIC slot, SFP (Small Factor Pluggable) transceiver module: From 550 meters to 2km (Multi-mode fiber), up to above 10/20/30/40/50/60/70/120 kilometers (Single-mode fiber).

■ Reset button

At the left of the front panel, the reset button is designed for rebooting the Web Smart Switch without turning off and on the power. The following is the summary table of Reset button functions:

Reset Button Pressed and Released	Function
< 5 sec: System Reboot	Reboot the Web Smart Switch.
> 5 sec: Factory Default	Reset the Web Smart Switch to Factory Default configuration. The Web Smart Switch will then reboot and load the default settings as follows: - Default Username: admin - Default Password: admin - Default IP address: 192.168.0.100 - Subnet mask: 255.255.255.0 - Default Gateway: 192.168.0.254

2.1.2 LED Indications

The front panel LEDs indicates instant status of power and system status, fan status, port links / PoE in-use and data activity;

helps monitor and troubleshoot when needed. Figure 2-2 shows the LED indications of the Web Smart Switch.

STW-1622HP LED Indication

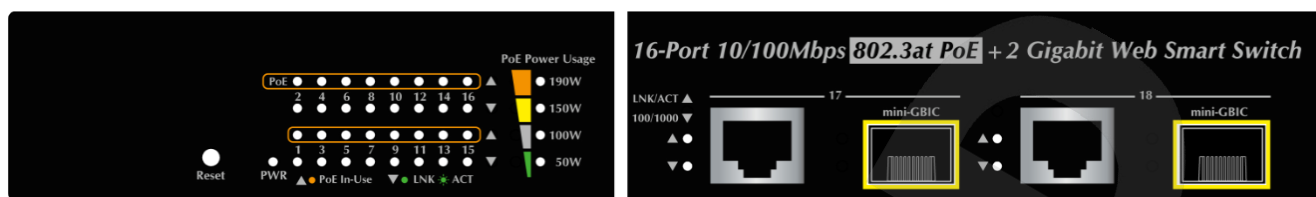


Figure 2-2: Web Smart Switch Series Model LED at Front Panel

STW-1622HP LED Indication Table

■ System

LED	Color	Function
PWR	Green	Lights to indicate that the Switch has power.

■ Per 10/100Mbps Port with PoE Interfaces (Port1 to Port16)

LED	Color	Function
LNK/ACT	Green	Lights: Indicates the link through that port is successfully established at 10/100Mbps.
		Blink: Indicates that the Switch is actively sending or receiving data over that port.
PoE In-Use	Orange	Lights: Indicates the port is providing PoE power.
		Off: Indicates the port is not providing PoE power.

■ Per 10/100/1000Mbps RJ45 Combo Interface (Port17 to Port18)

LED	Color	Function
LNK/ACT	Green	Blink: Indicates the port is successfully established.
100/1000	Green	Blink: Indicates the port is successfully established at 100Mbps.
		Lights: Indicates the port is successfully established at 1000Mbps.
		Off: Indicates the port is successfully established at 10Mbps.

■ Per 1000Mbps SFP Combo Interface (Port17 to Port18)

LED	Color	Function
LNK/ACT	Green	Lights: Indicates the port is successfully established.
		Blink: Indicates that the Switch is actively sending or receiving data over that port.
1000	Green	Lights: Indicates the port is successfully established at 1000Mbps.
		Off: Indicates the port is not established at 1000Mbps.

■ PoE Usage

LED	Color	Function
50W	Orange	Lights to indicate the PoE power consumption has equal 50W or over 50W.
100W	Orange	Lights to indicate the PoE power consumption has equal 100W or over 100W.
150W	Orange	Lights to indicate the PoE power consumption has equal 150W or over 150W.
190W	Orange	Lights to indicate the PoE power consumption has equal 190W or over 190W.

2.1.3 Switch Rear Panel

The rear panel of the Web Smart Switch indicates an AC inlet power socket, which accepts input power from 100 to 240V AC, 50-60Hz. [Figure 2-3](#) shows the rear panel of the Web Smart Switch.

STW-1622HP Rear Panel



Figure 2-3: Rear Panel of Web Smart Switch Series Model

■ AC Power Receptacle

For compatibility with electric service in most areas of the world, the Web Smart Switch's power supply automatically adjusts to line power in the range of 100-240V AC and 50/60 Hz.

Plug the female end of the power cord firmly into the socket on the rear panel of the Web Smart Switch. Plug the other end of the power cord into an electric service outlet and the power will be ready.

The device is a power-required device, which means it will not work till it is powered. If your networks should be active all the time, please consider using UPS (Uninterrupted Power Supply) for your device.

Power Notice: It will prevent you from network data loss or network downtime. In some areas, installing a surge suppression device may also help to protect your Web Smart Switch from being damaged by unregulated surge or current to the Switch.

2.2 Install the Switch

This section describes how to install your Web Smart Switch and make connections to the Web Smart Switch. Please read the following topics and perform the procedures in the order being presented. To install your Web Smart Switch on a desktop or shelf, simply complete the following steps.



As the Web Smart Switch have the same installation procedures, the **STW-1622HP** is picked to be an **example** for describing hardware installation.

2.2.1 Desktop Installation

To install the Web Smart Switch on desktop or shelf, please follow these steps:

Step1: Attach the rubber feet to the recessed areas on the bottom of the Web Smart Switch.

Step2: Place the Web Smart Switch on the desktop or the shelf near an AC power source, as shown in Figure 2-4.

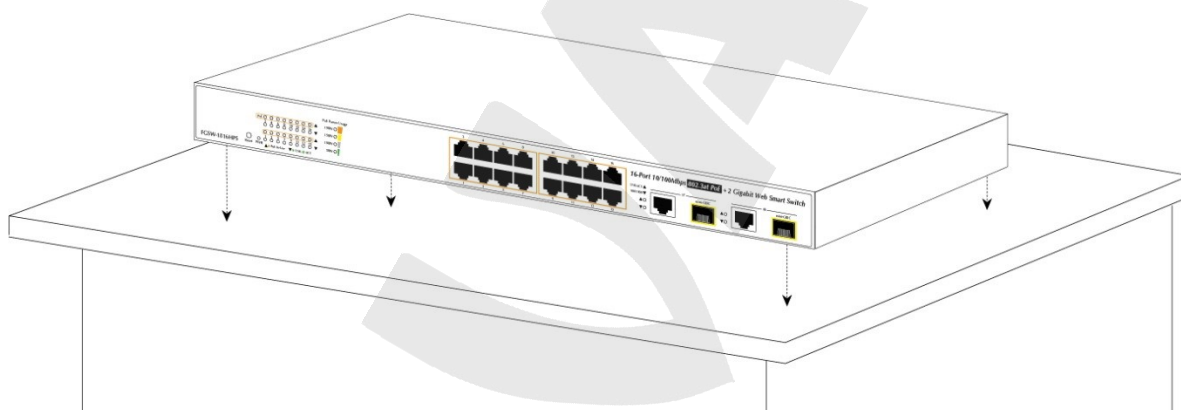


Figure 2-4: Place the Web Smart Switch on the Desktop

Step3: Keep enough ventilation space between the Web Smart Switch and the surrounding objects.



When choosing a location, please keep in mind the environmental restrictions discussed in Chapter 1, Section 4, and specifications.

Step4: Connect the Web Smart Switch to network devices.

Connect one end of a standard network cable to the 10/100/1000 RJ45 ports on the front of the Web Smart Switch. Connect the other end of the cable to the network devices such as printer server, workstation or router.



Connection to the Web Smart Switch requires UTP Category 5 network cabling with RJ45 tips. For more information, please see the Cabling Specification in Appendix A.

Step5: Supply power to the Web Smart Switch.

Connect one end of the power cable to the Web Smart Switch.

Connect the power plug of the power cable to a standard wall outlet.

When the Web Smart Switch receives power, the Power LED should remain solid Green.

2.2.2 Rack Mounting

To install the Web Smart Switch in a 19-inch standard rack, please follow the instructions described below.

Step1: Place the Web Smart Switch on a hard flat surface, with the front panel positioned towards the front side.

Step2: Attach the rack-mount bracket to each side of the Web Smart with supplied screws attached to the package.

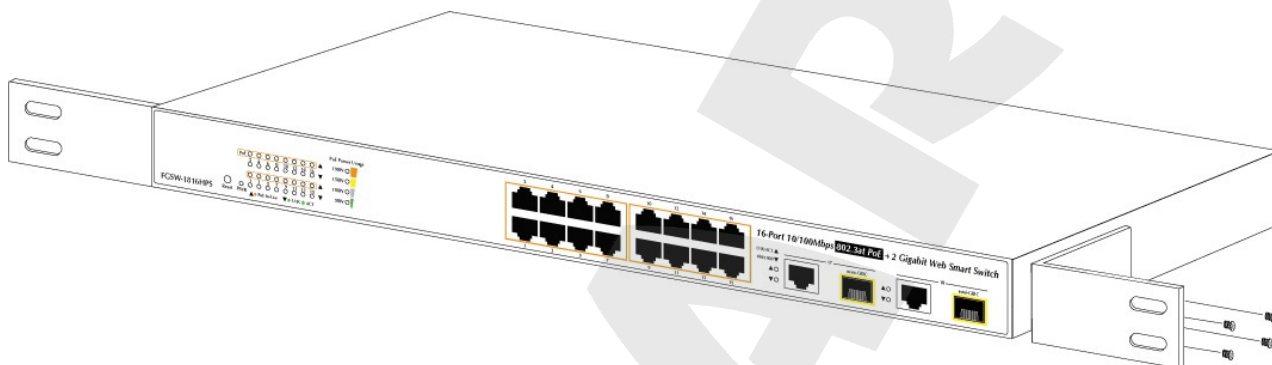


Figure 2-5: Attach Brackets to the Web Smart Switch.



You must use the screws supplied with the mounting brackets. Damage caused to the parts by using incorrect screws would invalidate the warranty.

Step3: Secure the brackets tightly.

Step4: Follow the same steps to attach the second bracket to the opposite side.

Step5: After the brackets are attached to the Web Smart Switch, use suitable screws to securely attach the brackets to the rack, as shown in Figure 2-6.

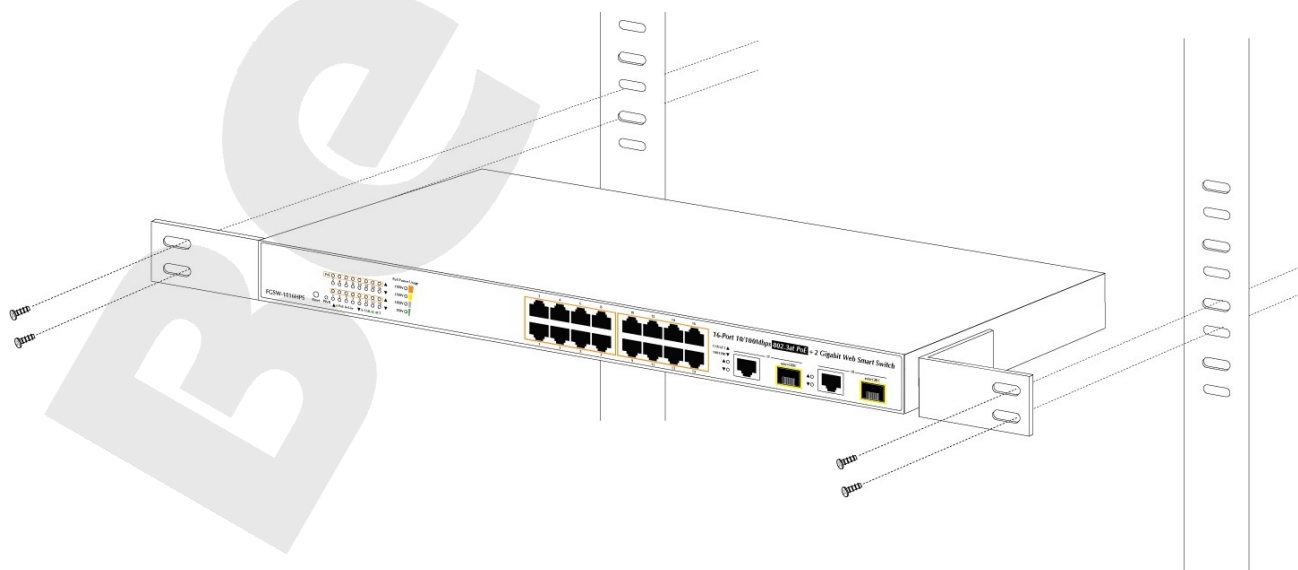


Figure 2-6: Mounting Web Smart Switch in a Rack

Step6: Proceeds with the steps 4 and 5 of session 2.2.1 Desktop Installation to connect the network cabling and supply power to the Web Smart Switch.

2.2.3 Installing the SFP Transceiver

The sections describe how to insert an SFP transceiver into an SFP slot.

The SFP transceivers are hot-pluggable and hot-swappable. You can plug-in and out the transceiver to/from any SFP port without having to power down the Web Smart Switch, as the Figure 2-7 shows.



Figure 2-7: Plug-in the SFP Transceiver

- Before we connect Web Smart Switch to the other network device, we have to make sure both sides of the SFP transceivers are with the same media type, for example: 1000BASE-SX to 1000BASE-SX, 1000BASE-LX to 1000BASE-LX.
- Check whether the fiber-optic cable type matches with the SFP transceiver requirement.
 - To connect to 1000BASE-SX SFP transceiver, please use the multi-mode fiber cable with one side being the male duplex LC connector type.
 - To connect to 1000BASE-LX SFP transceiver, please use the single-mode fiber cable with one side being the male duplex LC connector type.

■ Connect the Fiber Cable

- Insert the duplex LC connector into the SFP transceiver.
- Connect the other end of the cable to a device with SFP transceiver installed.
- Check the LNK/ACT LED of the SFP slot on the front of the Web Smart Switch. Ensure that the SFP transceiver is operating correctly.
- Check the Link mode of the SFP port if the link fails. To function with some fiber-NICs or Media Converters, user has to set the port Link mode to “1000 Force”.

■ Remove the Transceiver Module

- Make sure there is no network activity any more.
- Remove the Fiber-Optic Cable gently.

3. Lift up the lever of the MGB module and turn it to a horizontal position.
4. Pull out the module gently through the lever.



Figure 2-8: How to Pull Out the SFP Transceiver



Never pull out the module without lifting up the lever of the module and turning it to a horizontal position. Directly pulling out the module could damage the module and the SFP module slot of the Web Smart Switch.

3. SWITCH MANAGEMENT

This chapter explains the methods that you can use to configure management access to the Web Smart Switch. It describes the types of management applications and the communication and management protocols that deliver data between your management device (workstation or personal computer) and the system. It also contains information about port connection options.

This chapter covers the following topics:

- Requirements
- Management Access Overview
- Web Management Access
- SNMP Access
- Standards, Protocols, and Related Reading

3.1 Requirements

- Workstations running Windows 10/XP/2003/Vista/7/8/2008, MAC OS X or later, Linux, UNIX, or other platforms are compatible with TCP/IP protocols.
- Workstations are installed with Ethernet NIC (Network Interface Card)
- **Ethernet Port Connection**
 - Network cables -- Use standard network (UTP) cables with RJ45 connectors.
 - The above PC is installed with Web browser.



It is recommended to use Internet Explorer 8.0 or above to access the PoE Web Smart Switch.

3.2 Management Access Overview

The Web Smart Switch gives you the flexibility to access and manage it using any or all of the following methods:

- **Web browser** interface
- An external **SNMP-based network management application**

The Web browser interface support is embedded in the Web Smart Switch software and is available for immediate use. Each of these management methods has their own advantages. Table 3-1 compares the three management methods.

Method	Advantages	Disadvantages
Web Browser	• Ideal for configuring the switch remotely • Compatible with all popular browsers • Can be accessed from any location • Most visually appealing	• Security can be compromised (hackers need only know the IP address and subnet mask) • May encounter lag times on poor connections
SNMP Agent	• Communicates with switch functions at the MIB level • Based on open standards	• Requires SNMP manager software • Least visually appealing of all three methods • Some settings require calculations • Security can be compromised (hackers need only know the community name)

Table 3-1: Comparison of Management Methods

3.3 Web Management

The Web Smart Switch offers management features that allow users to manage the Web Smart Switch from anywhere on the network through a standard browser such as Microsoft Internet Explorer or Google Chrome. After set up your IP address for the Web Smart Switch, you can access the Web Smart Switch 's Web interface applications directly in your Web browser by entering the IP address of the Web Smart Switch.

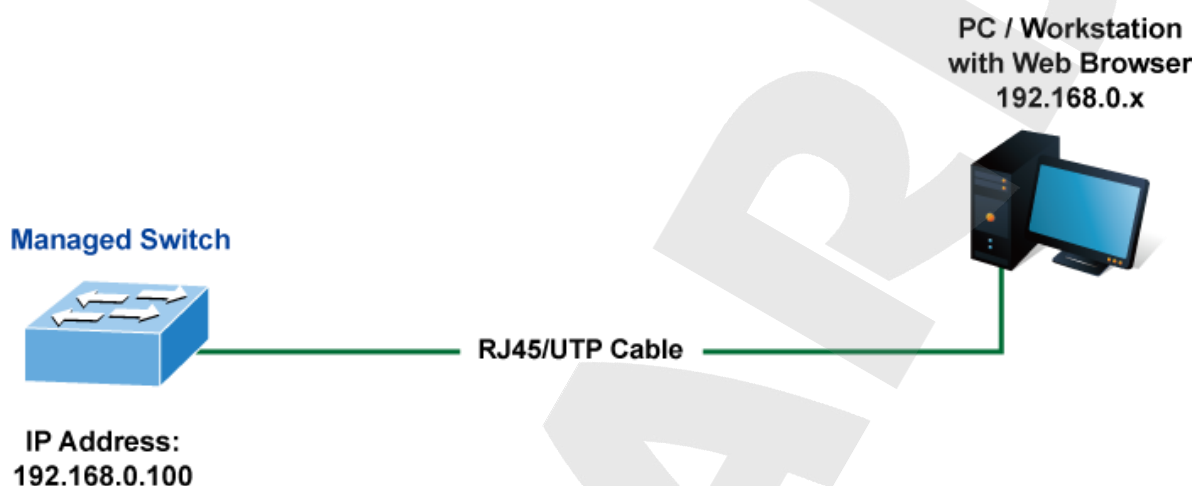


Figure 3-1: Web Management

You can then use your Web browser to list and manage the Web Smart Switch configuration parameters from one central location. Web Management requires either **Microsoft Internet Explorer 8.0** or later.

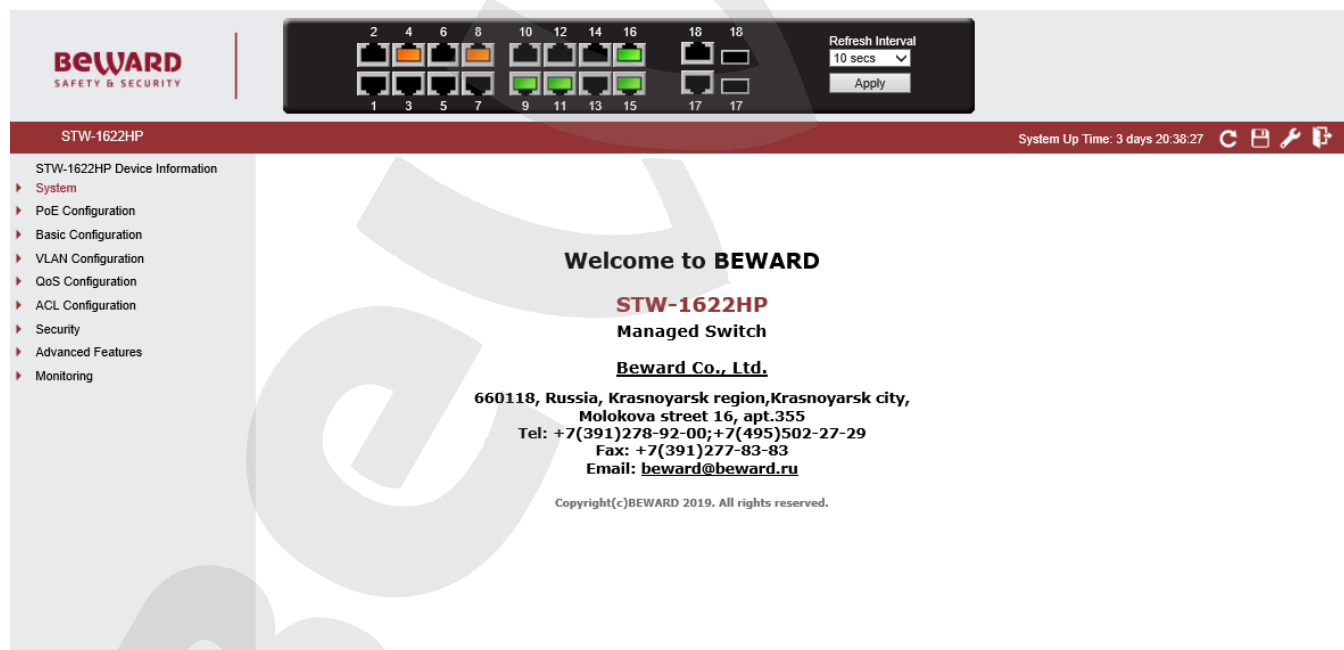


Figure 3-2: Web Main Screen of Web Smart Switch

3.4 SNMP-Based Network Management

You can use an external SNMP-based application to configure and manage the Web Smart Switch, such as SNMP Network Manager, HP Openview Network Node Management (NNM) or What's Up Gold. This management method requires the SNMP agent on the Web Smart Switch and the SNMP Network Management Station to use the **same community string**. This management method, in fact, uses two community strings: the **get community** string and the **set community** string. If the SNMP Network management Station only knows the set community string, it can read and write to the MIBs. However, if it only knows the get community string, it can only read MIBs. The default getting and setting community strings for the Web Smart Switch is public.

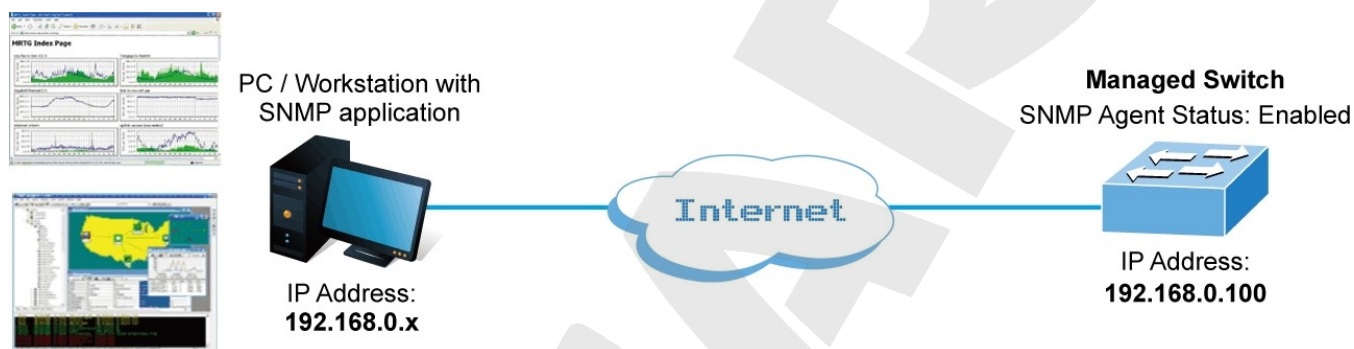


Figure 3-3: SNMP Management

3.5 BEWARD Smart Discovery Utility

For easily listing the Web Smart Switch in your Ethernet environment, the BEWARD Smart Discovery Utility is an ideal solution. The following installation instructions are to guide you to running the BEWARD Smart Discovery Utility.

1. Deposit the BEWARD Smart Discovery Utility in administrator PC.
2. Run this utility as the following screen appears.

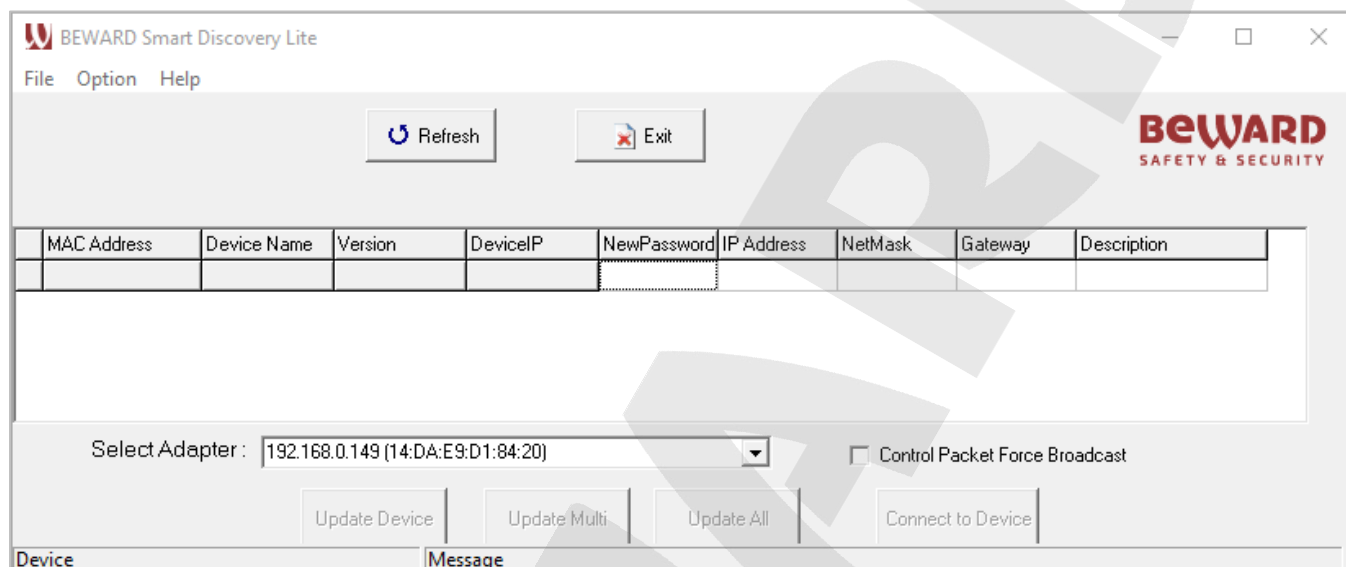


Figure 3-4: BEWARD Smart Discovery Utility Screen



If there are two LAN cards or above in the same administrator PC, choose different LAN card by using the “**Select Adapter**” tool.

3. Press “**Refresh**” button for the currently connected devices in the discovery list as the screen shows below:

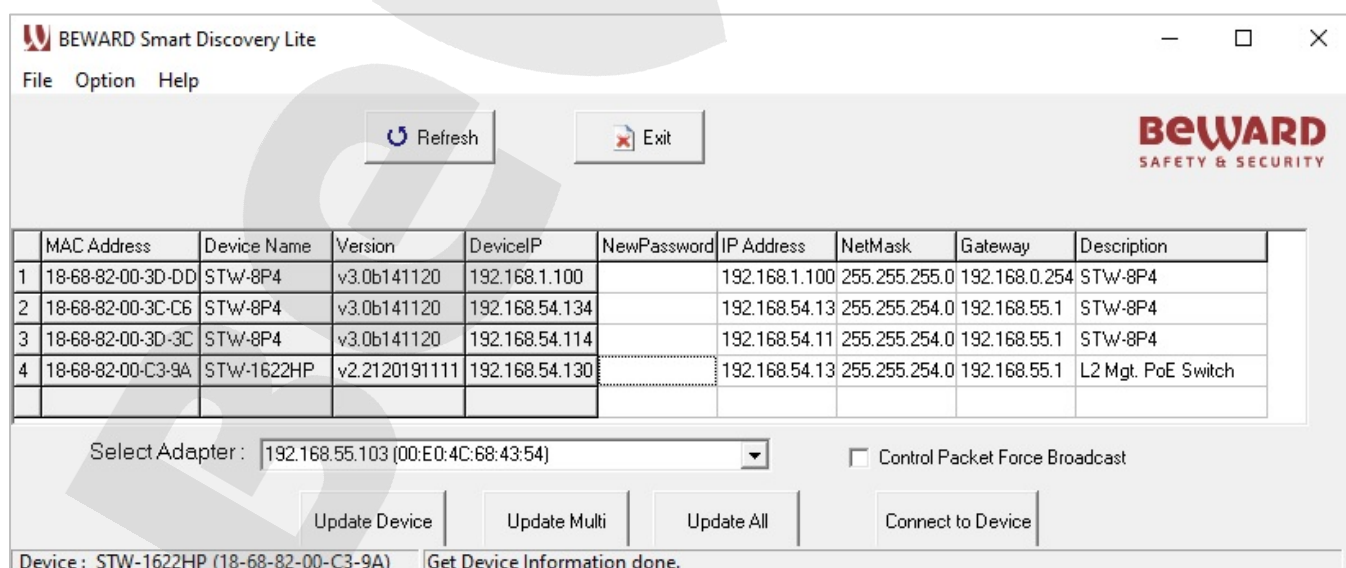


Figure 3-5: BEWARD Smart Discovery Utility Screen

1. This utility shows all necessary information from the devices, such as MAC Address, Device Name, firmware version, and Device IP Subnet address. It can also assign new password, IP Subnet address and description for the devices.
2. After setup is completed, press “**Update Device**”, “**Update Multi**” or “**Update All**” button to take effect. The meanings of the 3 buttons above are shown as below:

- **Update Device:** use current setting on one single device.
- **Update Multi:** use current setting on choose multi-devices.
- **Update All:** use current setting on whole devices in the list.

The same functions mentioned above also can be found in “**Option**” tools bar.

3. Click the “**Control Packet Force Broadcast**” function, it can allow assign new setting value to the Web Smart Switch under a different IP subnet address.
4. Press “**Connect to Device**” button and the Web login screen appears in [Figure 3-4](#).
5. Press “**Exit**” button to shut down the BEWARD Smart Discovery Utility.

4. WEB CONFIGURATION

This section introduces the configuration and functions of the Web-based management.

About Web-based Management

The Web Smart Switch offers management features that allow users to manage the Web Smart Switch from anywhere on the network through a standard browser such as Microsoft Internet Explorer or Google Chrome.

The Web Smart Switch can be configured through an Ethernet connection, making sure the manager PC must be set on the same IP subnet address with the Web Smart Switch.

For example, the default IP address of the Web Smart Switch is **192.168.0.100**, then the manager PC should be set at **192.168.0.x** (where x is a number between 1 and 254, except 100), and the default subnet mask is 255.255.255.0.

If you have changed the default IP address of the Web Smart Switch to 192.168.1.1 with subnet mask 255.255.255.0, then the manager PC should be set at 192.168.1.x (where x is a number between 2 and 254) to do the relative configuration on manager PC.

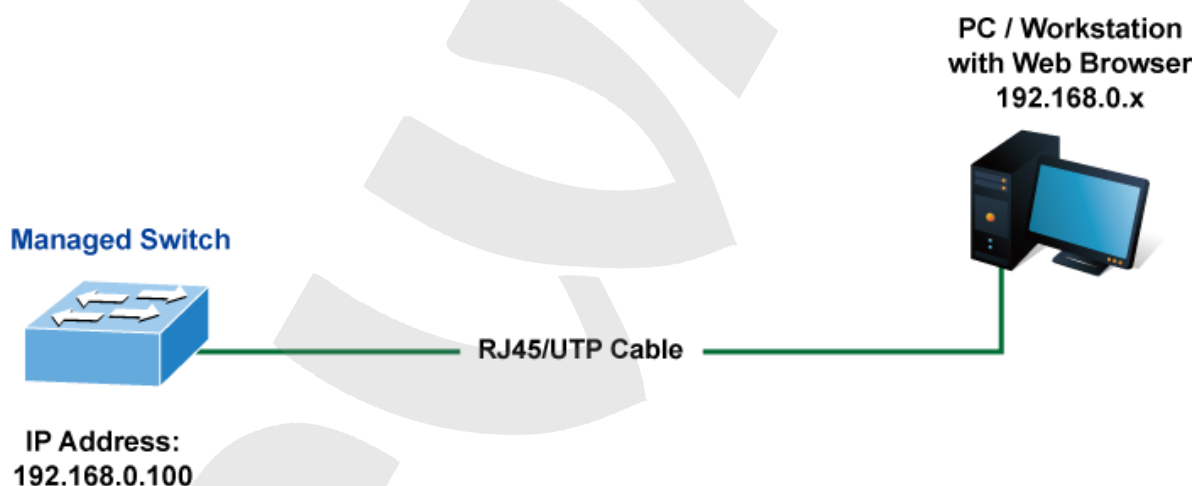


Figure 4-1-1: Web Management

■ Logging on the Web Smart Switch

1. Use Internet Explorer 8.0 or above Web browser. Enter the factory-default IP address to access the Web interface. The factory-default IP Address is shown as follows:

http://192.168.0.100

2. When the following login screen appears, please enter the default username **"admin"** with password **"admin"** (or the username/password you had changed it to) to login the main screen of Web Smart Switch. The login screen in [Figure 4-1-2](#) appears.

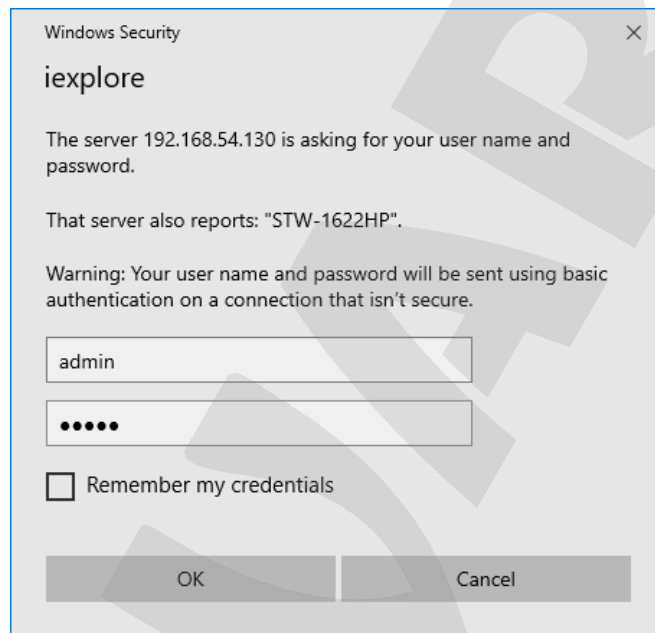


Figure 4-1-2: Login Screen

Default User name: **admin**

Default Password: **admin**

After entering the username and password, the main screen appears as shown in [Figure 4-1-3](#).

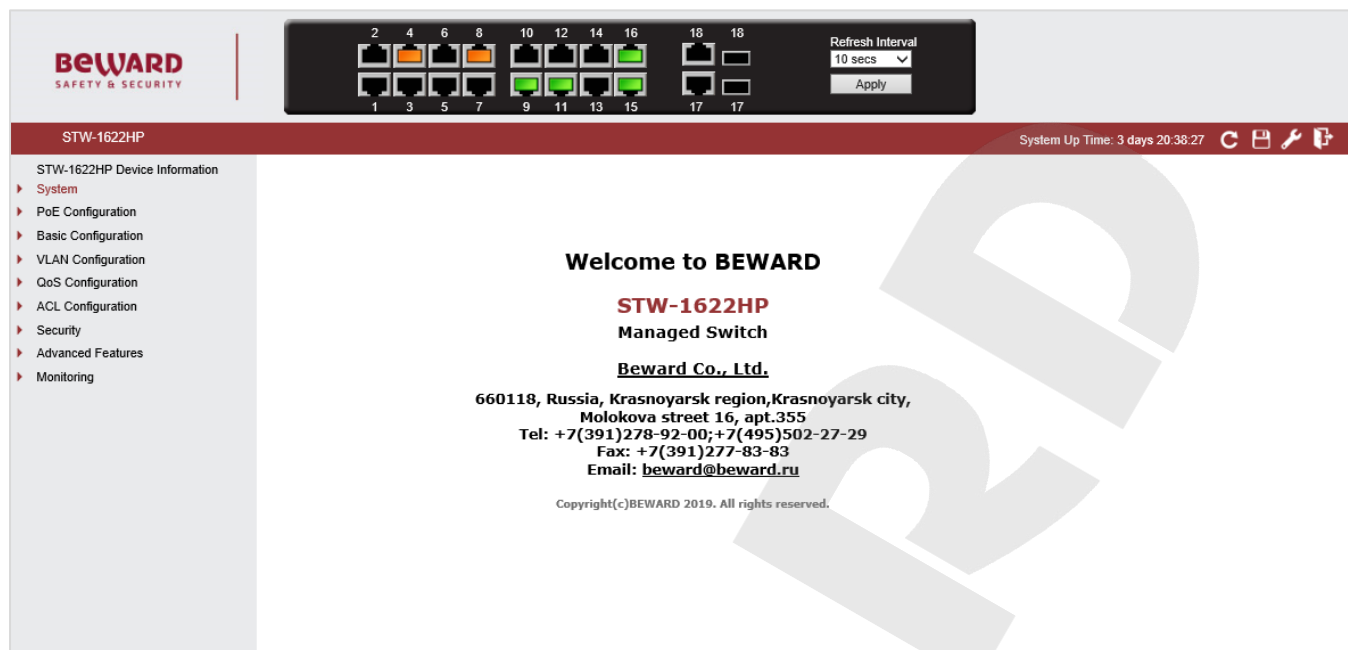


Figure 4-1-3: Web Main Page

Now, you can use the Web management interface to continue the switch management or manage the Web Smart Switch by Web interface. The Switch Menu on the left of the web Page lets you access all the commands and statistics the Web Smart Switch provides.



1. It is recommended to use Internet Explorer 8.0 or above to access Web Smart Switch.
2. The changed IP address takes effect immediately after clicking the **Save** icon on the top Switch Menu bar. You need to use the new IP address to access the Web interface.
3. For security reason, please change and memorize the new password after this first setup.

4.1 Main Web Page

The Web Smart Switch provides a Web-based browser interface for configuring and managing it. This interface allows you to access the Web Smart Switch using the Web browser of your choice. This chapter describes how to use the Web Smart Switch's Web browser interface to configure and manage it.

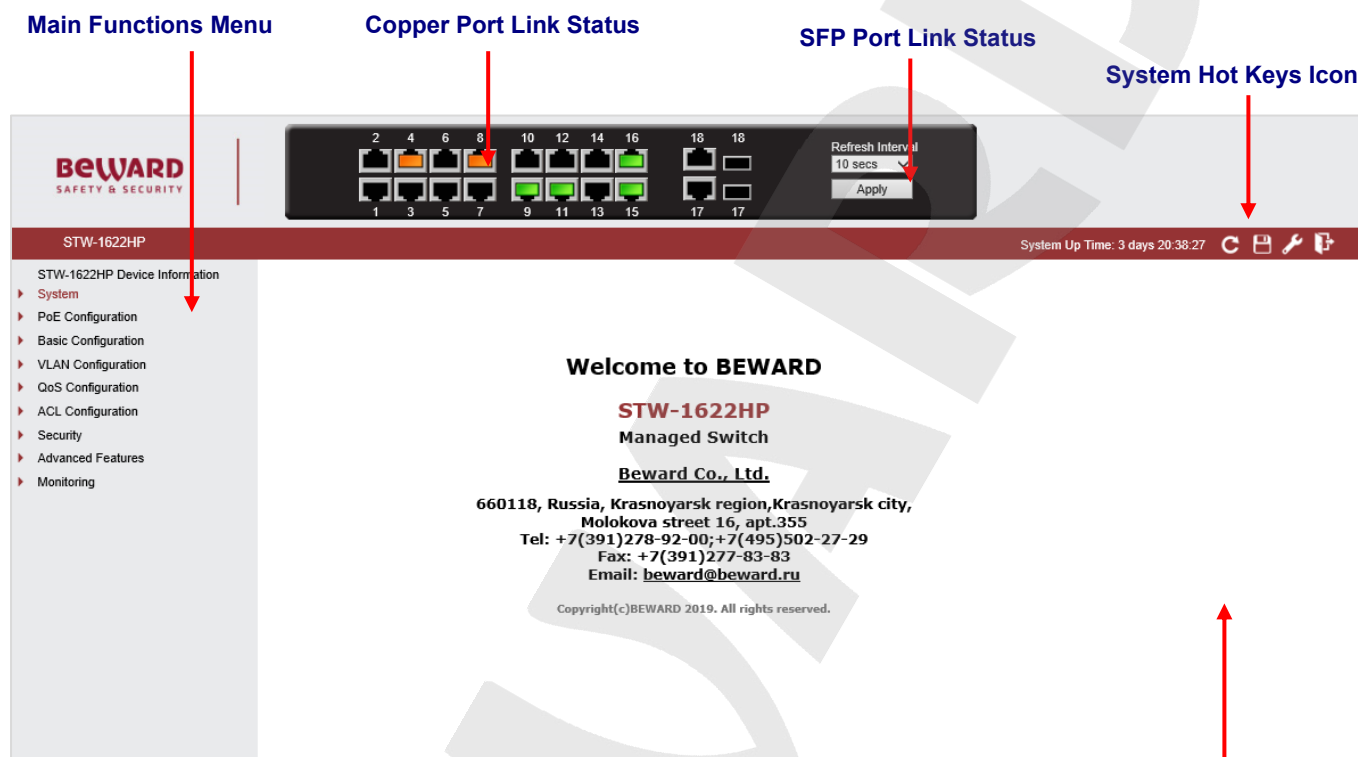


Figure 4-1-4: Web Main Page

Main Screen


Panel Display

The web agent displays an image of the Web Smart Switch's ports. The Mode can be set to display different information for the ports, including Link up or Link down. The port statuses are illustrated as follows:

State	Disabled	Down	Link
RJ45 Ports			
SFP Ports			

Refresh Interval Icon

The refresh interval icon is on the right side of the Web Smart Switch's web panel, it provides the following time setting options to refresh the web panel of Web Smart Switch. The available options are "Never", "5 secs", "10 secs", "30 secs", "1 min" and "Apply" button to take effect.



System Hot Key Icons

The system hot keys icons are in the right side of the Web Smart Switch's web page, from left to right side is System Up Time, refresh button, save config button, reboot button and logout button.

System Up Time: 4 days 16:03:56



Main Menu

Using the onboard web agent, you can define system parameters, manage and control the Web Smart Switch, and all its ports, or monitor network conditions. Via the Web-Management, the administrator can set up the Web Smart Switch by selecting the functions those listed in the Main Function. The screen in [Figure 4-1-5](#) appears.



Figure 4-1-5: Web Smart Switch Main Functions Menu

Device Information

Access Device Information web page, you can view device information of the Web Smart Switch, the screen in [Figure 4-1-6](#) appears and table 4-1-1 show the items of Device Information.

The screenshot shows the web interface for the STW-1622HP switch. At the top, there's a header with the BEWARD logo and a navigation bar. Below the header, there's a status bar showing 'STW-1622HP' and 'System Up Time: 3 days 20:38:41'. The main content area is titled 'Device Information' and contains two sections: 'Device Information' and 'Device Status and Quick Configurations'.

Device Information			
Device Type	Switch	MAC Address	18:68:82:00:c3:9a
Device Name	STW-1622HP	IP Address	192.168.0.100
Location	Location	Subnet Mask	255.255.255.0
Contact	Contact	Gateway	192.168.0.254

Device Status and Quick Configurations			
SNTP	Disabled	MLD Snooping	Disabled
Spanning Tree	Disabled	IGMP Snooping	Disabled

Figure 4-1-6: Web Smart Switch Device Information Web Page

Device Information	
Item	Description
Device Type	Display the device type information.
Device Name	Display the device name information.
Location	Display the device location information.
Contact	Display the device contact information.
MAC Address	Display the device MAC address information.
IP Address	Display the device IP address information.
Subnet Mask	Display the device subnet mask information.
Gateway	Display the device gateway information.
Device Status and Quick Configurations	
Item	Description
SNTP	Display the SNTP status and hyperlink to SNTP setting web page.
Spanning Tree	Display the Spanning Tree status and hyperlink to Spanning Tree setting web page.
MLD Snooping	Display the MLD Snooping status and hyperlink to MLD Snooping setting web page.
IGMP Snooping	Display the IGMP Snooping status and hyperlink to IGMP Snooping setting web page.

Table 4-1-1: Item Descriptions of Device Information

4.2 System

Use the system menu items to display and configure basic administrative details of the Web Smart Switch. Under the system the following topics are provided to configure and view the system information. This section has the following items:

Access system web page, you can view system functions of the Web Smart Switch, the screen in [Figure 4-2-1](#) appears and [table 4-2-1](#) show the items of System.

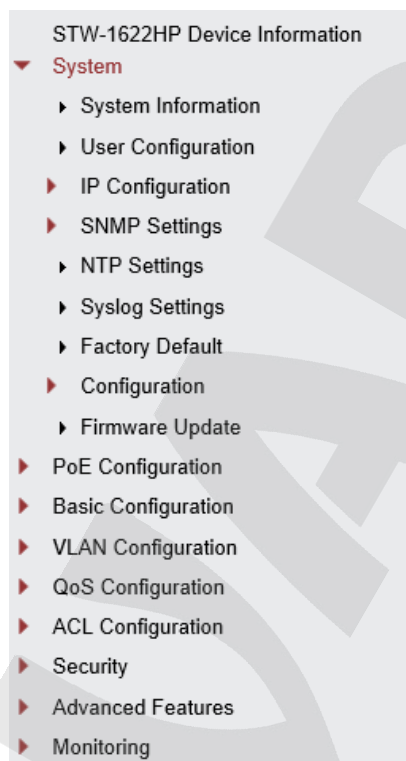


Figure 4-2-1: Web Smart Switch System Web Page

System Configuration	
Item	Description
System Information	The Web Smart Switch system information is provided here.
User Configuration	Configure the Web Smart Switch username and password information on this page.
IP Configuration	Configure the Web Smart Switch-managed IP/IPv6 information on this page.
SNMP Settings	Configure the Web Smart Switch-SNMP functions on this web page.
NTP Settings	Configure the Web Smart Switch-NTP function on this web page.
Syslog Settings	Configure the Web Smart Switch-System log function on this web page.
Factory Default	Reset the Web Smart Switch to default mode that excluding the IP address, User name and Password.
Configuration	Configure the Web Smart Switch configuration file backup and restore.
Firmware Update	This Page facilitates an update of the firmware controlling the Web Smart Switch.

Table 4-2-1: Item Descriptions of System Web Page

4.2.1 System Information

The System Information Page provides information for the current device information. System Information Page helps a switch administrator to identify the hardware MAC address, firmware version and system uptime and also config the device name, comment, location and contact information. The screen in [Figure 4-2-2](#) appears.

The screenshot shows a web interface titled "System Information". It contains several fields for configuration:

- MAC Address: A8:F7:E0:1F:22:34
- Firmware Version: v2.2120190605
- System Up Time: 02:54:48
- Device Name: FGSW-2624HPS4
- Comment: switch
- Location: Location
- Contact: Contact


 An "Apply" button is located at the bottom right of the form.

Figure 4-2-2: System Information Page Screenshot

The page includes the following fields:

Object	Description
• MAC Address	The Web Smart Switch MAC Address information is provided here.
• Firmware Version	The Web Smart Switch firmware version information is provided here.
• System Up Time	The Web Smart Switch system active time information is provided here.
• Device Name	Configure the Web Smart Switch device name information on this web page, the maximum length is 15 characters.
• Comment	Configure the Web Smart Switch comment information on this web page, the maximum length is 15 characters.
• Location	Configure the Web Smart Switch location information on this web page, the maximum length is 15 characters.
• Contact	Configure the Web Smart Switch contact information on this web page, the maximum length is 15 characters.


Button



: press this button to take effect.

4.2.2 User Configuration

The User configuration includes the User Name, Password and Confirm Password. The configured column is used to view or change the User Name and Password. The screen in [Figure 4-2-3](#) appears.

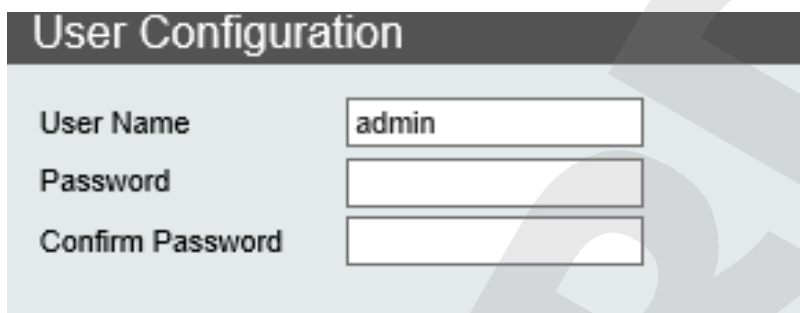


The screenshot shows a web interface titled "User Configuration". It contains three input fields: "User Name" with the value "admin", "Password", and "Confirm Password".

Figure 4-2-3: User Configuration Page Screenshot

The Current column is used to show the user configuration.

Object	Description
• User Name	Configure the Web Smart Switch user name information on this web page, the maximum length is 15 characters.
• Password	Configure the Web Smart Switch password information on this web page, the maximum length is 15 characters.
• Confirm Password	Confirm the Web Smart Switch password information on this web page, the maximum length is 15 characters.

Button



: press this button to take effect.



If you forget the new password after changing the default password, please press the **“Reset”** button on the front panel of the Web Smart Switch for over 5 seconds and then release it. The current setting including VLAN will be lost and the Web Smart Switch will restore to the default mode.

4.2.3 IP Configuration

The IP configuration includes the IPv4 subnet address setting and IPv6 subnet address setting, the configured column is used to view or change the IP configuration.

4.2.3.1 IPv4

The IPv4 configuration includes the IPv4 Address, Subnet Mask, Default Gateway and DNS Server, also the DHCPv4 Client Enable function. The configured column is used to view or change the IPv4 Address, Subnet Mask, Default Gateway and DNS Server. Fill up the IPv4 Address, Subnet Mask and Default Gateway or enable the DHCPv4 Client function for the Web Smart Switch. The screen in [Figure 4-2-4](#) appears.

IPv4

Static IPv4 Address

IPv4 Address

192.168.0.100

Subnet Mask

255.255.255.0

Default Gateway

192.168.0.254

DNS Server

DHCPv4

DHCPv4 Client Enable

☒

Apply

Figure 4-2-4: IPv4 Page Screenshot

4.2.3.2 IPv6

The IPv4 Configuration includes the IPv6 Address, Subnet Prefix Length, Default Gateway and DNS Server, also the DHCPv6 Client Enable function. The configured column is used to view or change the IPv6 Address, Subnet Prefix Length, Default Gateway and DNS Server. Fill up the IPv6 Address, Subnet Prefix Length and Default Gateway or enable the DHCPv6Client function for the Web Smart Switch. The screen in [Figure 4-2-5](#) appears.

IPv6

Static IPv6 Address

IPv6 Address

fe80::c0a8:64

Subnet Prefix Length

64

Default Gateway

fe80::c0a8:fe

DNS Server

DHCPv6

DHCPv6 Client Enable

☐

Apply

Figure 4-2-5: IPv6 Page Screenshot

Buttons

Apply

: press this button to take effect.

4.2.4 SNMP Settings

The Simple Network Management Protocol (SNMP) is an application layer protocol that facilitates the exchange of management information between network devices. It is part of the Transmission Control Protocol/Internet Protocol (TCP/IP) protocol suite. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth.

An SNMP-managed network consists of three key components: Network management stations (NMSs), SNMP agents, Management information base (MIB) and network-management protocol :

- **Network management stations (NMSs)** : These devices execute management applications that monitor and control network elements. Physically, NMSs are usually engineering workstation-caliber computers with fast CPUs, megapixel color displays, substantial memory, and abundant disk space. At least one NMS must be present in each managed environment.
- **Agents** : Agents are software modules that reside in network elements. They collect and store management information such as the number of error packets received by a network element.
- **Management information base (MIB)** : A MIB is a collection of managed objects residing in a virtual information store. Collections of related managed objects are defined in specific MIB modules.
- **network-management protocol** : A management protocol is used to convey management information between agents and NMSs. SNMP is the Internet community's de facto standard management protocol.

SNMP Operations

SNMP itself is a simple request/response protocol. NMSs can send multiple requests without receiving a response.

- **Get** -- Allows the NMS to retrieve an object instance from the agent.
- **Set** -- Allows the NMS to set values for object instances within an agent.
- **Trap** -- Used by the agent to asynchronously inform the NMS of some event. The SNMPv2 trap message is designed to replace the SNMPv1 trap message.

SNMP community

An SNMP community is the group that devices and management stations running SNMP belong to. It helps define where information is sent. The community name is used to identify the group. A SNMP device or agent may belong to more than one SNMP community. It will not respond to requests from management stations that do not belong to one of its communities.

SNMP default communities are:

- **Write** = private
- **Read** = public

Use the SNMP Menu to display or configure the Web Smart Switch's SNMP function. This section has the following items:

- | | |
|-------------------------------|--|
| ■ SNMP View Table | Configure SNMP view table settings on this web page. |
| ■ SNMP Group Table | Configure SNMP group settings on this web page. |
| ■ SNMP User Table | Configure SNMP user table settings on this web page. |
| ■ SNMP Community Table | Configure SNMP community table on this web page. |
| ■ SNMP Host Table | Configure SNMP host table on this web page. |

■ **SNMP Configuration**

Configure SNMP configuration on this web page.

BEWARD

4.2.4.1 SNMP View Table

The SNMP View Table provide to set view rules for allow or deny access to certain MIB objects, the configured column is used to input the view name, subtree OID and change the view type. The screen in [Figure 4-2-6](#) appears.

View Name	Subtree	Type	Action
systemview	1.3.6.1.2.1.1	included	Delete
systemview	1.3.6.1.2.1.2	included	Delete
systemview	1.3.6.1.2.1.11	included	Delete
systemview	1.3.6.1.2.1.16	included	Delete
systemview	1.3.6.1.2.1.17	included	Delete

Figure 4-2-6: SNMP View Table Configuration Page Screenshot

The Current column is used to show the SNMP View Table configuration.

Object	Description
• View Name	Configure the Web Smart Switch view name information on this web page, the maximum length is 20 characters.
• Subtree OID	Configure the Web Smart Switch Subtree OID information on this web page.
• View Type	Configure the Web Smart Switch view type mode on this web page, the available options are Included and Excluded .

Buttons

Apply

: press this button to take effect.

Delete

: press this button to delete.



Note

Each view needs to configure a view rule, otherwise it will affect the SNMP function.

4.2.4.2 SNMP Group Table

The SNMP View Table provide to set SNMP Group settings, the configured column is used to input the group name, change the Read, Write, Notify view type and Security Model /Level. The screen in [Figure 4-2-7](#) appears.

SNMP Group Settings

Group Name:

Read View:

Write View:

Notify View:

Security Model:

Security Level:

Group Name	Read View	Write View	Notify View	Security Model	Security Level	Action
public	systemview	none	systemview	v1	noauth	Delete
public	systemview	none	systemview	v2c	noauth	Delete
private	systemview	systemview	systemview	v1	noauth	Delete
private	systemview	systemview	systemview	v2c	noauth	Delete

Figure 4-2-7: SNMP Group Table Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Group Name	Configure the Web Smart Switch group name information on this page, the maximum length is 20 characters.
• Read View	Choose the Read View and available options are: ■ None: Set none for Read View status. ■ systemview: Set systemview for Read View status.
• Write View	Choose the Write View and available options are: ■ None: Set none for Read View status. ■ systemview: Set systemview for Write View status.
• Notify View	Choose the Notify View and available options are: ■ None: Set none for Read View status. ■ systemview: Set systemview for Notify View status.
• Security Model	Indicates the SNMP supported version. Possible versions are: ■ SNMP v1: Set SNMP supported version 1. ■ SNMP v2: Set SNMP supported version 2c. ■ SNMP v3: Set SNMP supported version 3.
• Security Level	Available when choose the SNMPv3 in Security Model. Possible versions are: ■ NoAuthNoPriv: None authentication and none privacy. ■ AuthNoPriv: Authentication and none privacy. ■ AuthPriv: Authentication and privacy.

Buttons

Apply

: press this button to take effect.

Delete

: press this button to delete.



The SNMP group needs to create the view before group create.

4.2.4.3 SNMP User Table

The SNMP User Table provide to set SNMP user settings, the configured column is used to input the user name, select the group name and input the password for Auth-Protocol MD5 /Priv-Protocol DES. The screen in [Figure 4-2-8](#) appears.

User Name	Group Name	Auth-Protocol	Priv-Protocol	Action
-----------	------------	---------------	---------------	--------

Figure 4-2-8: SNMP User Table Configuration Page Screenshot

The page includes the following fields:

Object	Description
• User Name	Configure the Web Smart Switch user name information on this page, the maximum length is 20 characters.
• Group Name	Select the exist SNMP group.
• Auth-Protocol MD5	Set the authorization password with using the MD5 authentication level, the available length is 8 to16 characters.
• Priv-Protocol DES	Set the authorization password with using the standard DES private encryption protocol, the available length is 8 to16 characters.

Buttons

Apply

: press this button to take effect.

Delete

: press this button to delete.



Create SNMP views and groups are required to use, the security level of the user needs to be the same as the security level of the group.

4.2.4.4 SNMP Community Table

The SNMP User Table provides to set SNMP community settings; the configured column is used to input the community name, and select the group name for access group as the screen in [Figure 4-2-9](#) appears.

SNMP Community Table

Community Name

Access Group public


Community Name	Group Name	Action
public	public	Delete
private	private	Delete

Figure 4-2-9: SNMP Community Table Configuration Page Screenshot

The page includes the following fields:

Object	Description
Community Name	Configure the Web Smart Switch community name information on this page, the maximum length is 20 characters.
Access Group	Select the exist access group.

Buttons




: press this button to take effect.



: press this button to delete.

4.2.4.5 SNMP Host Table

The SNMP Host Table provides to set SNMP host settings. The configured column is used to input the host IP address, and select the security model, security level and community string for SNMPv3 user as the screen in [Figure 4-2-10](#) appears.

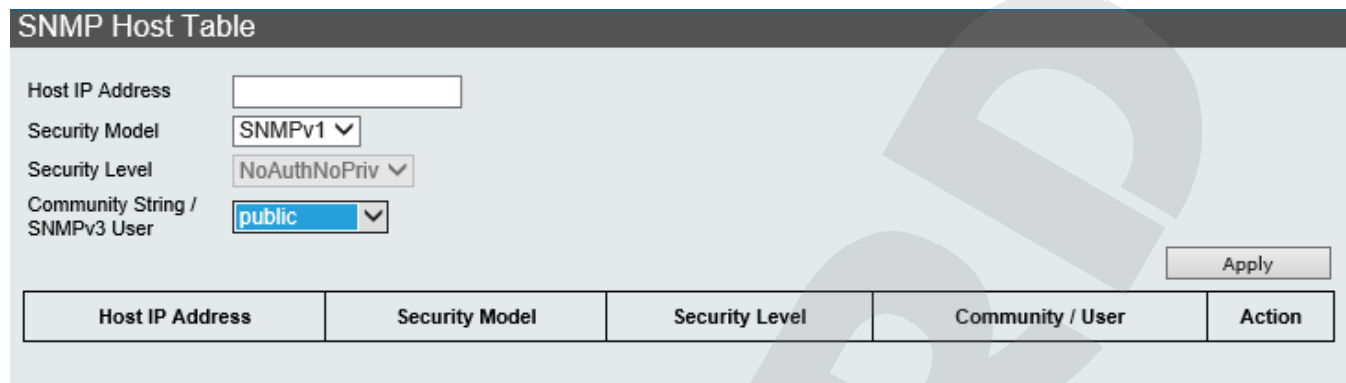

The screenshot shows the 'SNMP Host Table' configuration page. It includes a form with the following fields:

- Host IP Address: A text input field.
- Security Model: A dropdown menu with 'SNMPv1' selected.
- Security Level: A dropdown menu with 'NoAuthNoPriv' selected.
- Community String / SNMPv3 User: A dropdown menu with 'public' selected.

An 'Apply' button is located to the right of the form. Below the form is a table with the following columns:

Host IP Address	Security Model	Security Level	Community / User	Action
-----------------	----------------	----------------	------------------	--------

Figure 4-2-10: SNMP Host Table Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Host IP Address	Configure the Web Smart Switch IPv4 Host Ip address on this page.
• Security Model	Indicates the SNMP supported version. Possible versions are: ■ SNMP v1: Set SNMP supported version 1. ■ SNMP v2: Set SNMP supported version 2c. ■ SNMP v3: Set SNMP supported version 3.
• Security Level	Available when choose the SNMPv3 in Security Model. Possible versions are: ■ NoAuthNoPriv: None authentication and none privacy. ■ AuthNoPriv: Authentication and none privacy. ■ AuthPriv: Authentication and privacy.
• Community String/SNMPv3 User	Select the exist community string for SNMPv3 user.

Button

Apply

: press this button to take effect.

4.2.4.6 SNMP Configuration

The SNMP Host Table provides to set SNMP settings; the configured column is used to input the selected operation modes of SNMP State, SNMP Trap and SNMP Link Change Traps as the screen in [Figure 4-2-11](#) appears.

Figure 4-2-11: SNMP Configuration Page Screenshot

The page includes the following fields:

Object	Description
• SNMP State	Enable or Disable the Web Smart Switch SNMP function on this page.
• SNMP Trap	Enable or Disable the Web Smart Switch SNMP trap function on this page.
• SNMP Link Change Traps	Enable or Disable the Web Smart Switch SNMP Link Change trap function on this page.

Button

Apply

: press this button to take effect.

4.2.5 NTP Settings


On this page, **NTP**, an acronym for **Network Time Protocol**, is for synchronizing the clocks of computer systems. NTP uses UDP (data grams) as transport layer. You can specify NTP Servers and set GMT time zone. The NTP configuration screen in [Figure 4-2-12](#) appears.

Figure 4-2-12: NTP Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• System Time	Display current system time of Web Smart Switch.
• State	Indicates the NTP mode operation. Possible modes are: ■ Enable: Enable NTP mode operation. When enable NTP mode operation, the agent forward and to transfer NTP messages between the clients and the server when they are not on the same subnet domain. ■ Disable: Disable NTP mode operation.
• Time Zone	Allow selecting the time zone according to current location of Web Smart Switch.
• Primary Server IP	Configure the NTP server IPv4 IP address on this page.
• Secondary Server IP	Configure the NTP server IPv4 IP address on this page.

Button



: press this button to take effect.

4.2.6 Syslog Settings

The Syslog settings provide to set system log settings, the configured column is used to select the related settings of Syslog settings as the screen in [Figure 4-2-13](#) appears.

Syslog Settings

Global Setting

Syslog State ☒ Apply

Facility Setting

Name	State	Facility
DHCPD	☒	Local1 ▾
GVRP	☒	Local2 ▾
STP-LACP-D	☒	Local3 ▾
Multicast_Table_D	☒	Local4 ▾
Misc_App	☒	Local5 ▾

Apply

Remote Server Setting

Index	Server Info.		Priority							
	IP	Port	Local0	Local1	Local2	Local3	Local4	Local5	Local6	Local7
1	192.168.0.99	514	7 ▾	7 ▾	7 ▾	7 ▾	7 ▾	7 ▾	7 ▾	7 ▾
2			--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾
3			--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾
4			--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾	--- ▾


Apply

Figure 4-2-13: Syslog Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Syslog State	Enable or disable the Syslog function.
• Name	Display the available protocol for facility setting on this page.
• State	Click to enable the available protocol for facility setting on this page.
• Facility	Select the local device number and the range is 0 to 7.
• IP	Input the IP address of remote server
• Port	The port number of the remote server.
• Priority	Log priority range 0 to 7.

Button



: press this button to take effect.

4.2.7 Factory Default

You can reset the configuration of the Web Smart Switch on this page. Only the IP configuration is retained. The new configuration is available immediately, which means that no restart is necessary. The Factory Default screen in [Figure 4-2-14](#) appears.


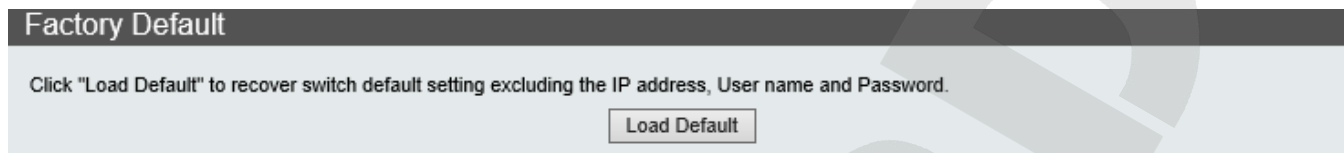


Figure 4-2-14: Factory Default Configuration Page Screenshot

Button



: Click to reset the configuration to Factory Defaults.



To reset the Web Smart Switch to the Factory default setting, you can also press the hardware-based reset button at the front panel about 5 seconds.

4.2.8 Configuration

The configuration includes backup and reload the current configuration of the Web Smart Switch to/from the local management station.

4.2.8.1 Backup

The backup configuration provides downloading the Web Smart Switch configuration file (Current.tar.gz) to local management station as the screen in [Figure 4-2-15](#) appears.

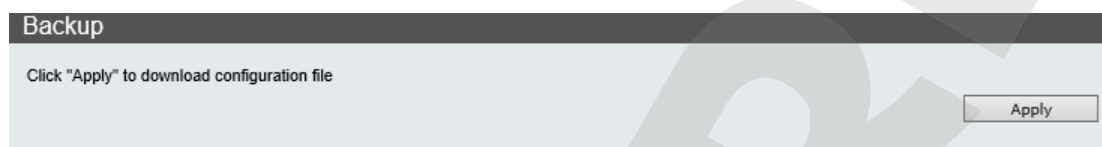


Figure 4-2-15: Backup Configuration Page Screenshot

4.2.8.2 Restoration

The restore configuration provides upload the Web Smart Switch configuration file (Current.tar.gz) to other Web Smart Switch from local management station as the screen in [Figure 4-2-16](#) appears.


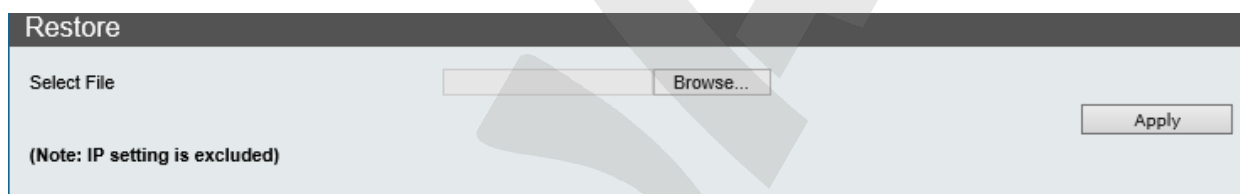


Figure 4-2-16: Restoring Configuration Page Screenshot



The Web Smart Switch configures restoration as **the IP address setting is excluded**.

Button



: press this button to take effect.

4.2.9 Firmware Update

This page facilitates an update on the firmware controlling the switch as the Web Firmware Upgrade screen in [Figure 4-2-17](#) appears.



Figure 4-2-17: Web Firmware Update Page Screenshot

To open **Firmware Upgrade** screen, perform the following:

1. Click **System -> Firmware Upgrade**.
2. Click the "Browse..." button of the Main Page, the system would pop up the file selection menu to choose firmware.
3. Select on the firmware then click "Apply", the **Software Upload Progress** would show the file with upload status.
4. Once the software is loaded to the system successfully, the following screen appears. The system will load the new software after reboot.



DO NOT Power OFF the Web Smart Switch until the update progress is complete.

4.3 PoE Configuration

On the Access PoE configuration web page, you can view PoE function information of the Web Smart Switch as the screen in [Figure 4-3-1](#) appears.

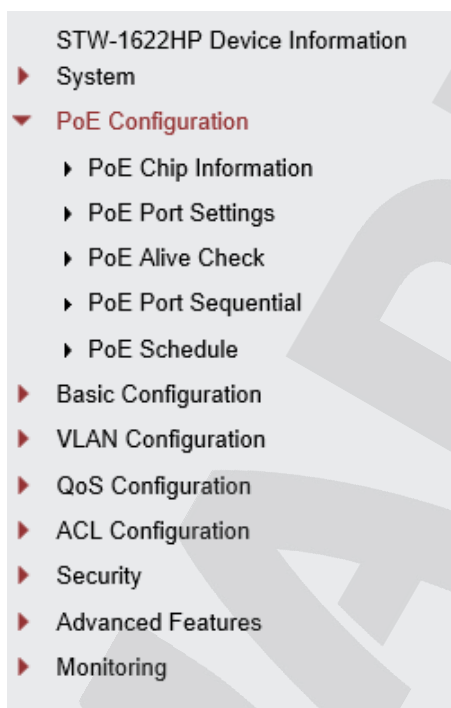


Figure 4-3-1: Web Smart Switch PoE Configuration Web Page

PoE Configuration	
Item	Description
PoE Chip Information	Display the PoE Chipset temperature information.
PoE Port Settings	Display and configure PoE Port settings.
PoE Alive Check	Display and configure PoE Alive Check settings.
PoE Port Sequential	Display and configure PoE Port Sequential settings.
PoE Schedule	Display and configure PoE Schedule settings.

Table 4-3-1: Descriptions of PoE Configuration

4.3.1 PoE Chip Information

This page displays system voltage and current PoE chipset temperature as the PoE chip information screen in [Figure 4-3-2](#) appears.

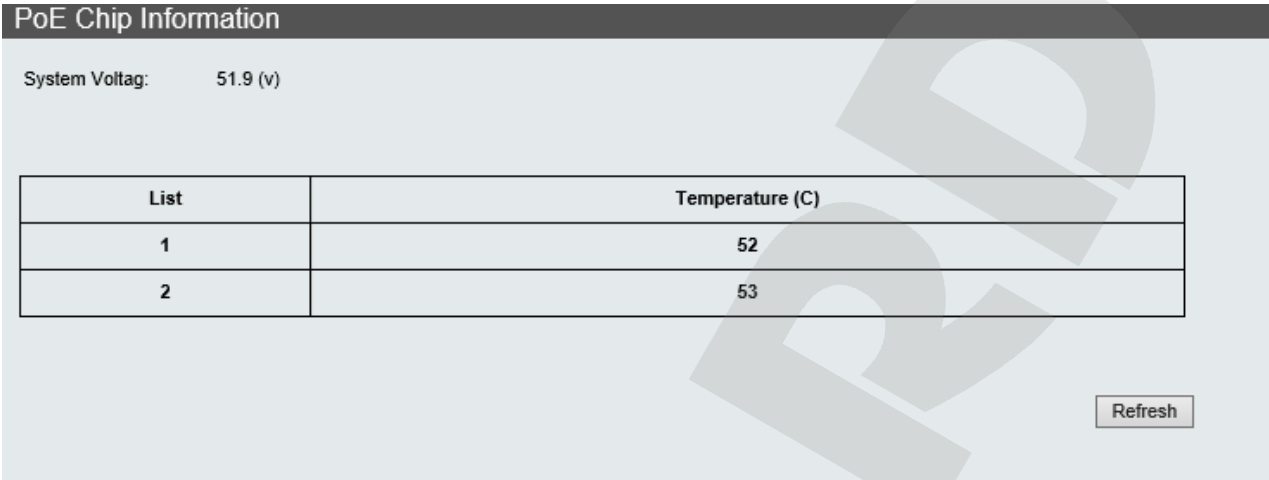



Figure 4-3-2: PoE Chip Information Page Screenshot

The page includes the following fields:

Object	Description
• System Voltage	Display the system voltage information.
• List	Display the chipset numbers.
• Temperature	Display the temperature information of each PoE chipset.

Button

: press this button to refresh temperature information.

4.3.2 PoE Port Settings

This page provides configuration for all PoE ports as the PoE Port settings screen in [Figure 4-3-3](#) appears.

PoE Port Settings

Total Available Power 220 Watts

Total Consumption 0.0 Watts

Port Selection															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

State

Mode

Budget Watt (Max. 36)

Apply

Port	Settings			Status	
	State	Budget (Watt)	AT/AF	Class	Consumption (Watt)
01	Enabled	36	AT	-	-
02	Enabled	36	AT	-	-
03	Enabled	36	AT	-	-
04	Enabled	36	AT	-	-
05	Enabled	36	AT	-	-
06	Enabled	36	AT	-	-
07	Enabled	36	AT	-	-
08	Enabled	36	AT	-	-

Refresh

Figure 4-3-3: PoE Port Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Total Available Power	Display Web Smart Switch PoE Budget.
• Total Consumption	Display Web Smart Switch current PoE power used in watts.
• Port Selection	Select specific PoE port for further configuration.
• State	Enable or disable specific PoE port power feeding function.
• Mode	Choose AT or AF PoE operation mode.
• Budget (Watt)	Input the PoE power output value and the available options are 1 to 36 watts.
• Port	Display per PoE port list.
Settings	
• State	Display per PoE port operation status.
• Budget (Watt)	Display per PoE port budget setting.
• AT/AF	Display per PoE port AT/AF setting.
Status	
• Class	Display per PoE port current PoE class value detection.
• Consumption (Watt)	Display per PoE port current PoE power usage information in watts.

Buttons

Apply

: press this button to take effect.

Refresh

: press this button to refresh information.

4.3.3 PoE Alive Check

The Web Smart Switch can be configured to monitor connected PD's status in real-time via ping action. Once the PD stops working and without response, Web Smart Switch is going to restart PoE port watts. power, and bring the PD back to work. It will greatly enhance the reliability and reduces administrator management burden.

This page provides you how to configure PD Alive Check function as the screen in Figure 4-3-4 appears.

Figure 4-3-4: PoE Alive Check Configuration Page Screenshot

The page includes the following fields:

Object	Description
Global Settings	
• Check Every xxx Seconds	This column allows user to set how long system should be issue a ping request to PD for detecting PD is alive or dead. Check time range is from 10 seconds to 600 seconds.
• Wake up After xxx Seconds	This column allows user to set the PoE device rebooting time, due to there being many kinds of PoE devices on the market and they each have different rebooting times. This function is not a defining standard, so the PoE device on the market doesn't report reboots done information to Web Smart Switch, so user has to make sure how long the PD will be finished to boot, and then set the time value to this column. System is going to check the PD again according to the reboot time. If you cannot set the precise booting time, we suggest you to set it longer.

Port Settings	
• Port	Select specific PoE port for further configuration and list all ports on this page.
• State	Enable or disable specific PoE port PoE Alive Check function and display current status of each PoE port.
• IP of Device to Check	This column allows user to set PoE device IP address here for system making ping to the PoE device. Please be noticed that the PD's IP address must be set to the same network segment with Web Smart Switch. Also display current setting of each PoE port.

Buttons

Apply

: press this button to take effect.

Refresh

: press this button to refresh information.

4.3.4 PoE Port Sequential

This page allows the user to configure the PoE Ports started up interval time as the PoE Port Sequential configuration screen in [Figure 4-3-5](#) appears.

PoE Port Sequential

Port Selection															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

State: Delay: Seconds (Max. 300) Apply

Port	State	Delay Time (Seconds)
01	Disabled	0
02	Disabled	0
03	Disabled	0
04	Disabled	0
05	Disabled	0
06	Disabled	0
07	Disabled	0
08	Disabled	0

Refresh

Figure 4-3-5: PoE Port Sequential Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	Select specific PoE port for further configuration.
• State	Enable or disable specific PoE Port sequential function.
• Delay xxx Seconds (Max. 300)	This column allows user to configure the PoE Port Start Up interval time. Delay time range is from 1 seconds to 300 seconds.
• Port	Display per PoE port list.
• State	Display per PoE port operation status.

- | | |
|-------------------------------|--|
| • Delay Time (Seconds) | Display per PoE port delay time (seconds) setting. |
|-------------------------------|--|

Buttons

Apply

: press this button to take effect.

Refresh


: press this button to refresh information.

4.3.5 PoE Schedule

This page allows the user to define PoE schedule and schedule power recycle.

PoE Schedule

Besides being used as an IP Surveillance, the Web Smart Switch is certainly applicable to constructing any PoE network including VoIP and Wireless LAN. Under the trend of energy saving worldwide and contributing to the environmental protection on the Earth, the Managed PoE switch can effectively control the power supply besides its capability of giving high watts power.

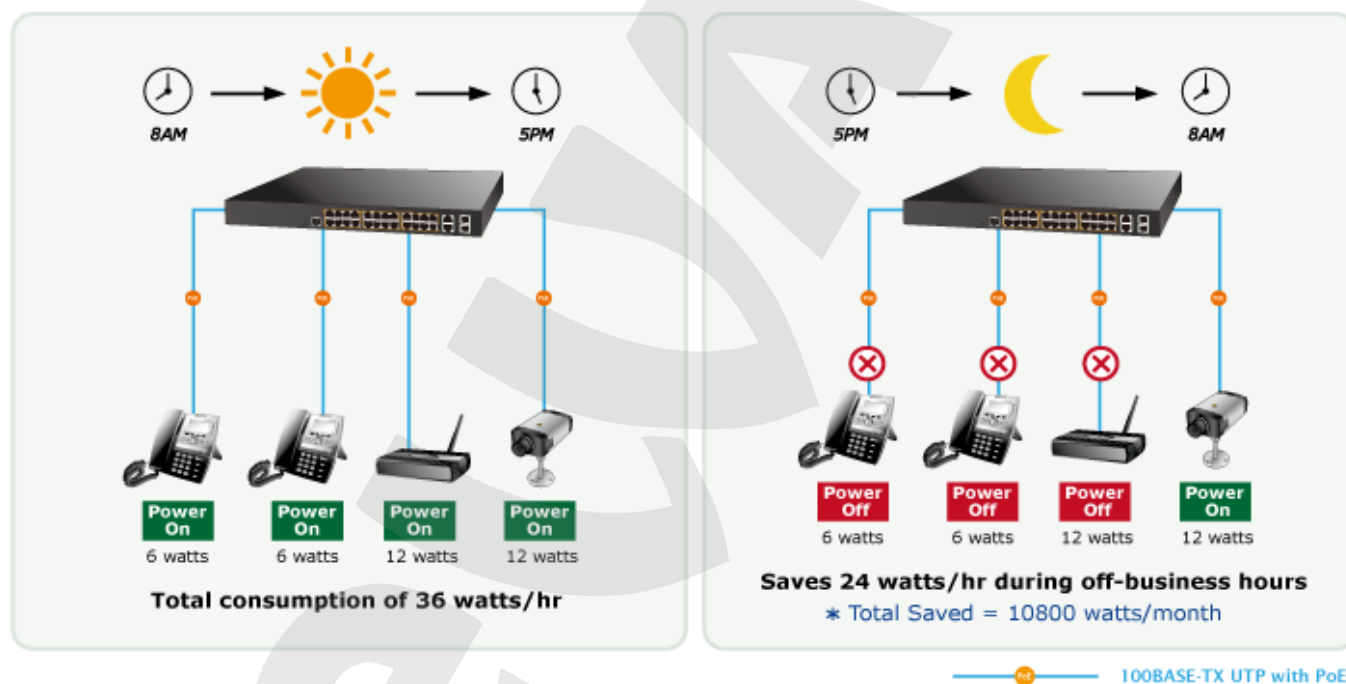

The **"PoE schedule"** function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or Enterprises save power and budget. The screen in Figure 4-3-6 appears.

PoE Schedule

Port Selection																
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	

Port **1** State: **Disabled** change to **Enable**

All	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Mon ☐	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Tue ☐	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Wed ☐	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Thu ☐	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Fri ☐	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Sat ☐	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Sun ☐	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

Apply


Note: PoE Schedule function needs to get NTP time

Figure 4-3-6: PoE Schedule Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	Select specific PoE port for further configuration.
• Port	List all PoE Port for configure PoE schedule function.
• State: xxxxx change to	This column allows user to configure the PoE Port Start Up interval time. Delay time range is from 1 seconds to 300 seconds.
• All	Select all options on this page.
• Mon-Sun	Provide Mon/Tue/Wed/Thu/Fri/Sat/Sun options on this page.
• 00-23	Provide 24 hours options on this page.

Button



: press this button to take effect.



The Web Smart Switch PoE schedule function needs to get NTP time.

4.4 Basic Configuration

On the Access Basic configuration web page, you can view Port management function information of the Web Smart Switch as the screen in [Figure 4-4-1](#) appears.

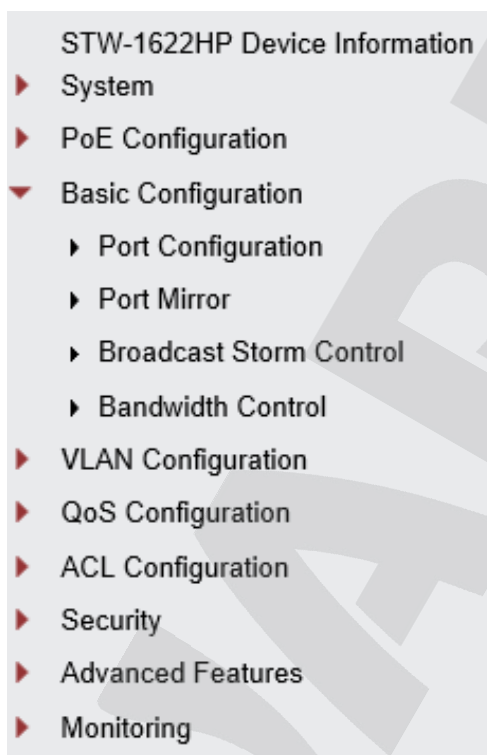


Figure 4-4-1: Web Smart Switch Basic Configuration Web Page

Basic Configuration	
Item	Description
Port Configuration	Display and configure per Port configuration settings.
Port Mirror	Display and configure Port Mirror function.
Broadcast Storm Control	Display and configure Broadcast Storm Control function.
Bandwidth Control	Display and configure Bandwidth Control function.

Table 4-4-1: Descriptions of Basic Configuration

4.4.1 Port Configuration

This page displays current port configurations and each port can also be configured here as the Port configuration screen in Figure 4-4-2 appears.

Port Configuration

Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

State:
 Speed/Duplex:
 Auto Negotiation:
 Flow Control:
 Address Learning:
 Name:


Port	Settings				Status			Name
	State	Speed/Duplex	Auto Nego.	Flow Control	Learning	Speed/Duplex	Flow Control	
01	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port1
02	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port2
03	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port3
04	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port4
05	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port5
06	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port6
07	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port7
08	Enabled	100M Full	Enabled	Enabled	Enabled	----	----	port8

Figure 4-4-2 : Port Configuration Page Screenshot


The page includes the following fields:

Object	Description
• Port Selection	Select specific port for further configuration.
• State	Enable or disable specific Port function.
• Speed/Duplex	Change specific Port speed duplex and the available options are shown below: Top Speed/10M Half/10M Full/100M Half/100M Full/1000M Full.
• Auto Negotiation	Enable or disable auto negotiation function on specific Port.
• Flow Control	Enable or disable flow control function on specific Port.
• Address Learning	Enable or disable address learning function on specific Port.
• Name	Configure the Web Smart Switch per port description information on this page; the maximum length is 20 characters.
• Port	Display per port list.
Setting	
• State	Display per port current operation setting mode.
• Speed/Duplex	Display per port current speed/duplex setting mode.

• Auto Nego.	Display per port current auto negotiation setting mode.
• Flow Control	Display per port current flow control setting mode.
Status	
• Learning	Display per port current learning setting mode.
• Speed/Duplex	Display per port current speed/duplex mode.
• Flow Control	Display per port current flow control mode.
• Name	Display per port current description information.

ButtonsApply

: press this button to take effect.

Refresh

: press this button to refresh information.

4.4.2 Port Mirroring

On this page, port mirroring provides monitoring network traffic that forwards a copy of each incoming or outgoing packet from one port of a Web Smart Switch to another port where the packet can be studied. It enables the manager to keep close track of switch performance and alter it if necessary.

- To debug network problems, selected traffic can be copied, or mirrored, to a mirror port where a frame analyzer can be attached to analyze the frame flow.
- The Web Smart Switch can unobtrusively mirror traffic from any port to a monitor port. You can then attach a protocol analyzer or RMON probe to this port to perform traffic analysis and verify connection integrity.

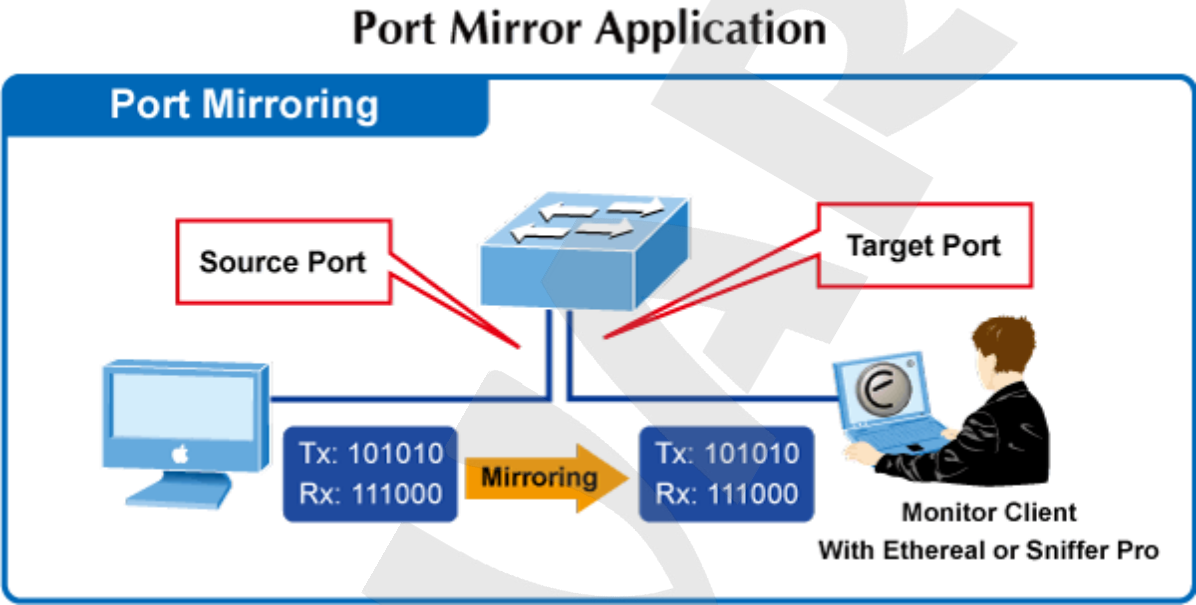


Figure 4-4-3: Port Mirroring Application

The traffic to be copied to the mirror port is selected as follows:

- All frames received on a given port (also known as ingress or source mirroring).
- All frames transmitted on a given port (also known as egress or destination mirroring).

Port Mirroring Configuration

The Port Mirroring screen in [Figure 4-4-4](#) is shown below.

Port Mirror

Source Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐


Destination Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

State: Method:

Figure 4-4-4: Port Mirroring Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Source Port Selection	Select specific port for monitoring incoming and outgoing flow from the port.
• Destination Port Selection	Select the specific port for copy flow data from source ports and then forward to message analyzer to analyze message, and finally analysis of message forward to destination port.
• State	Enable or disable the port mirroring function.
• Method	Select method for monitoring of incoming, outgoing or both methods, and the available options are shown below: Egress/Ingress/Both.

Button

: press this button to take effect.

4.4.3 Broadcast Storm Control

Storm control for the switch is configured on this page. There are a broadcast storm rate control, multicast storm rate control, and unicast storm rate control. These only affect flooded frames, i.e. frames with a (VLAN ID, DMAC) pair not present on the MAC Address table.


The configuration indicates the permitted packet rate for unicast, multicast or broadcast traffic across the switch as the Broadcast Storm Control configuration screen in [Figure 4-4-5](#) appears.

Figure 4-4-5: Broadcast Storm Control Configuration Page Screenshot

The page includes the following fields:

Object	Description
Storm Control Settings	
• Type	Types of storm control: Broadcast: Broadcast packet. Multicast: Multicast packet, 40th bit in the destination MAC is 1 DLF: The destination address in the MAC table does not exist ARP: ARP packet. ICMP: ICMP packet.
• Threshold (0-255)	During the receive period, the port receives an upper limit for the specified packet type

• Period for (Giga/100/10)	Set reception period and the available options are shown below: 200us/2ms/20ms 1ms/10ms/100ms 10ms/10ms/10ms 100ms/100ms/100ms
Storm Control State	
• Port Selection	Select specific port for further configuration.
• Broadcast	Enable or disable the broadcast storm control function.
• Multicast	Enable or disable the multicast storm control function.
• DLF	Enable or disable the unknown destination MAC packets control function.
• ARP	Enable or disable the ARP packets control function.
• ICMP	Enable or disable the ICMP packets control function.
• Port No.	Display per port list.
• Broadcast	Display per port broadcast storm control setting.
• Multicast	Display per port multicast storm control setting.
• DLF	Display per port unknown destination MAC packets control setting.
• ARP	Display per port ARP packets control setting.
• ICMP	Display per port ICMP packets control setting.

Button

: press this button to take effect.

4.4.4 Bandwidth Control

This page allows you to configure the incoming and outgoing bandwidth control settings for all switch ports as the bandwidth control screen in [Figure 4-4-6](#) appears.

Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Ingress Rate (kbps) (1~1000000) Egress Rate (kbps) (1~1000000)

Port	Ingress Rate (kbps)	Egress Rate (kbps)
01	Unlimited	Unlimited
02	Unlimited	Unlimited
03	Unlimited	Unlimited
04	Unlimited	Unlimited
05	Unlimited	Unlimited
06	Unlimited	Unlimited
07	Unlimited	Unlimited
08	Unlimited	Unlimited
09	Unlimited	Unlimited
10	Unlimited	Unlimited

Figure 4-4-6: Bandwidth Control Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	Select specific port for incoming and outgoing bandwidth control settings.
• Ingress Rate (kbps) • (1-1000000)	Controls the rate (unit: kbps) for the ingress rate. This value is restricted to 1-1000000. The default value is Unlimited .
• Egress Rate (kbps) • (1-1000000)	Controls the rate (unit: kbps) for the egress rate. This value is restricted to 1-1000000. The default value is Unlimited .
• Port	Display per port list.
• Ingress Rate (kbps)	Display per port ingress rate setting value.
• Egress Rate (kbps)	Display per port egress rate setting value.

Buttons

: press this button to take effect.

: press this button to refresh information.

4.5 VLAN Configuration

4.5.1 VLAN Overview

A **Virtual Local Area Network (VLAN)** is a network topology configured according to a logical scheme rather than the physical layout. VLAN can be used to combine any collection of LAN segments into an autonomous user group that appears as a single LAN. VLAN also logically segment the network into different broadcast domains so that packets are forwarded only between ports within the VLAN. Typically, a VLAN corresponds to a particular subnet, although not necessarily.

VLAN can enhance performance by conserving bandwidth, and improve security by limiting traffic to specific domains.

A VLAN is a collection of end nodes grouped by logic instead of physical location. End nodes that frequently communicate with each other are assigned to the same VLAN, regardless of where they are physically on the network. Logically, a VLAN can be equated to a broadcast domain, because broadcast packets are forwarded to only members of the VLAN on which the broadcast was initiated.



1. No matter what basis is used to uniquely identify end nodes and assign these nodes VLAN membership, packets cannot cross VLAN without a network device performing a routing function between the VLANs.
2. The Web Smart Switch supports IEEE 802.1Q VLAN. The port untagging function can be used to remove the 802.1 tag from packet headers to maintain compatibility with devices that are tag-unaware.



The Web Smart Switch's default is to assign all ports to a single 802.1Q VLAN named DEFAULT_VLAN. As new VLAN is created, the member ports assigned to the new VLAN will be removed from the DEFAULT_VLAN port member list. The DEFAULT_VLAN has a VID = 1.

On the Access VLAN configuration web page, you can view VLAN management function information of the Web Smart Switch as the screen in [Figure 4-5-1](#) appears.



Figure 4-5-1: Web Smart Switch VLAN Configuration Web Page

VLAN Configuration	
Item	Description
VLAN Mode	Configure VLAN Mode configuration settings on this web page.
VLAN Group-based Entry Config	Display and configure VLAN Group-based Entry Config function on this web page.
VLAN Tag-based Entry Config	Display and configure VLAN Tag-based Entry Config function on this web page.
VLAN Port Config	Display and configure VLAN Port Config function on this web page.
Protocol VLAN Config	Display and configure Protocol VLAN Config function on this web page.
QinQ Port Config	Display and configure QinQ Port Config function on this web page.
QinQ Index Config	Display and configure QinQ Index Config function on this web page.

Table 4-5-1: Descriptions of VLAN Configuration

4.5.2 IEEE 802.1Q VLAN

In large networks, routers are used to isolate broadcast traffic for each subnet into separate domains. This Web Smart Switch provides a similar service at Layer 2 by using VLANs to organize any group of network nodes into separate broadcast domains. VLANs confine broadcast traffic to the originating group, and can eliminate broadcast storms in large networks. This also provides a more secure and cleaner network environment.

An IEEE 802.1Q VLAN is a group of ports that can be located anywhere in the network, but communicate as though they belong to the same physical segment.

VLANs help to simplify network management by allowing you to move devices to a new VLAN without having to change any physical connections. VLANs can be easily organized to reflect departmental groups (such as Marketing or R&D), usage groups (such as e-mail), or multicast groups (used for multimedia applications such as videoconferencing).

VLANs provide greater network efficiency by reducing broadcast traffic, and allow you to make network changes without having to update IP addresses or IP subnets. VLANs inherently provide a high level of network security since traffic must pass through a configured Layer 3 link to reach a different VLAN.

This Web Smart Switch supports the following VLAN features:

- Up to 26 VLANs based on the IEEE 802.1Q standard
- Port overlapping, allowing a port to participate in multiple VLANs
- End stations can belong to multiple VLANs
- Passing traffic between VLAN-aware and VLAN-unaware devices
- Priority tagging

■ IEEE 802.1Q Standard

IEEE 802.1Q (tagged) VLAN are implemented on the Switch. 802.1Q VLAN require tagging, which enables them to span the entire network (assuming all switches on the network are IEEE 802.1Q-compliant).

VLAN allows a network to be segmented in order to reduce the size of broadcast domains. All packets entering a VLAN will only be forwarded to the stations (over IEEE 802.1Q enabled switches) that are members of that VLAN, and this includes

broadcast, multicast and unicast packets from unknown sources.

VLAN can also provide a level of security to your network. IEEE 802.1Q VLAN will only deliver packets between stations that are members of the VLAN. Any port can be configured as either **tagging** or **untagging**:

- The untagging feature of IEEE 802.1Q VLAN allows VLAN to work with legacy switches that don't recognize VLAN tags in packet headers.
- The tagging feature allows VLAN to span multiple 802.1Q-compliant switches through a single physical connection and allows Spanning Tree to be enabled on all ports and work normally.


Some relevant terms:

- **Tagging** - The act of putting 802.1Q VLAN information into the header of a packet.
- **Untagging** - The act of stripping 802.1Q VLAN information out of the packet header.

802.1Q VLAN Tags


The figure below shows the 802.1Q VLAN tag. There are four additional octets inserted after the source MAC address. Their presence is indicated by a value of **0x8100** in the Ether Type field. When a packet's Ether Type field is equal to 0x8100, the packet carries the IEEE 802.1Q/802.1p tag. The tag is contained in the following two octets and consists of 3 bits of user priority, 1 bit of Canonical Format Identifier (CFI - used for encapsulating Token Ring packets so they can be carried across Ethernet backbones), and 12 bits of **VLAN ID (VID)**. The 3 bits of user priority are used by 802.1p. The VID is the VLAN identifier and is used by the 802.1Q standard. Because the VID is 12 bits long, 4094 unique VLAN can be identified. The tag is inserted into the packet header making the entire packet longer by 4 octets. All of the information originally contained in the packet is retained.


802.1Q Tag

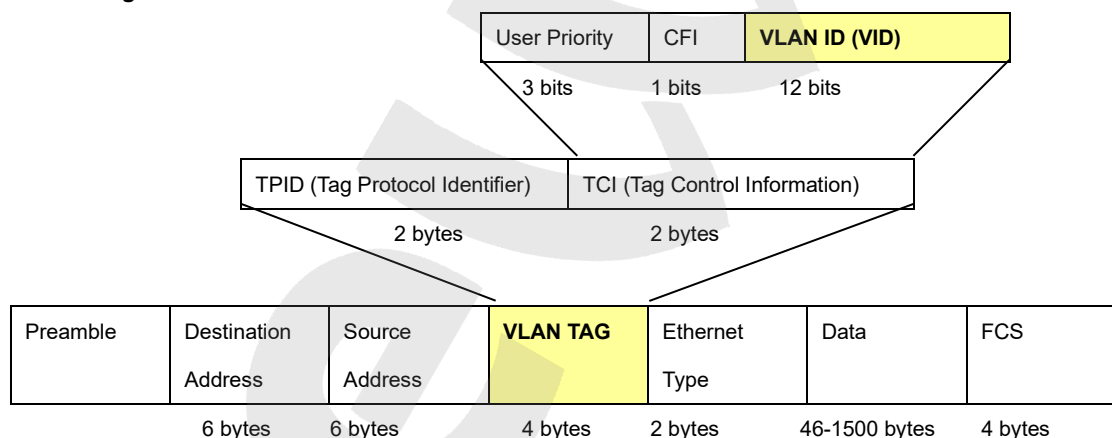

The Ether Type and VLAN ID are inserted after the MAC source address, but before the original Ether Type/Length or Logical Link Control. Because the packet is now a bit longer than it was originally, the Cyclic Redundancy Check (CRC) must be recalculated.

Adding an IEEE802.1Q Tag

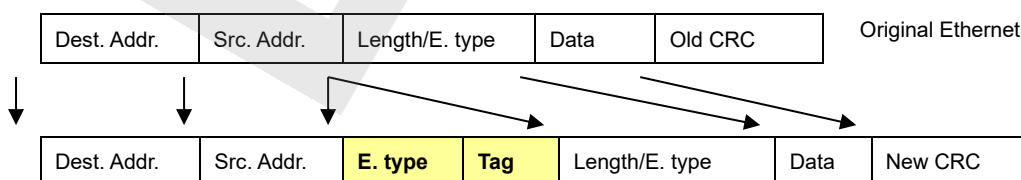



New Tagged Packet

BEWARD

■ Port VLAN ID

Packets that are tagged (are carrying the 802.1Q VID information) can be transmitted from one 802.1Q compliant network device to another with the VLAN information intact. This allows 802.1Q VLAN to span network devices (and indeed, the entire network – if all network devices are 802.1Q compliant).

Every physical port on a switch has a PVID. 802.1Q ports are also assigned a PVID, for use within the switch. If no VLAN are defined on the switch, all ports are then assigned to a default VLAN with a PVID equal to 1. Untagged packets are assigned the PVID of the port on which they were received. Forwarding decisions are based upon this PVID, in so far as VLAN are concerned. Tagged packets are forwarded according to the VID contained within the tag. Tagged packets are also assigned a PVID, but the PVID is not used to make packet forwarding decisions, the VID is.

Tag-aware switches must keep a table to relate PVID within the switch to VID on the network. The switch will compare the VID of a packet to be transmitted to the VID of the port that is to transmit the packet. If the two VID are different the switch will drop the packet. Because of the existence of the PVID for untagged packets and the VID for tagged packets, tag-aware and tag-unaware network devices can coexist on the same network.

A switch port can have only one PVID, but can have as many VID as the switch has memory in its VLAN table to store them.


Because some devices on a network may be tag-unaware, a decision must be made at each port on a tag-aware device before packets are transmitted – should the packet to be transmitted have a tag or not? If the transmitting port is connected to a tag-unaware device, the packet should be untagged. If the transmitting port is connected to a tag-aware device, the packet should be tagged.

■ Default VLANs

The Switch initially configures one VLAN, VID = 1, called **"Default."** The factory default setting assigns all ports on the Switch to the **"Default"**. As new VLAN are configured in Port-based mode, their respective member ports are removed from the "default."

■ Assigning Ports to VLANs

Before enabling VLANs for the switch, you must first assign each port to the VLAN group(s) in which it will participate. By default, all ports are assigned to VLAN 1 as untagged ports. Add a port as a tagged port if you want it to carry traffic for one or more VLANs, and any intermediate network devices or the host at the other end of the connection supports VLANs. Then assign ports on the other VLAN-aware network devices along the path that will carry this traffic to the same VLAN(s), either manually or dynamically using GVRP. However, if you want a port on this switch to participate in one or more VLANs, but none of the intermediate network devices nor the host at the other end of the connection supports VLANs, then you should add this port to the VLAN as an untagged port.



VLAN-tagged frames can pass through VLAN-aware or VLAN-unaware network interconnection devices, but the VLAN tags should be stripped off before passing it on to any end-node host that does not support VLAN tagging.

VLAN Classification

When the switch receives a frame, it classifies the frame in one of two ways. If the frame is untagged, the switch assigns the frame to an associated VLAN (based on the default VLAN ID of the receiving port). But if the frame is tagged, the switch uses the tagged VLAN ID to identify the port broadcast domain of the frame.

Port Overlapping

Port overlapping can be used to allow access to commonly shared network resources among different VLAN groups, such as file servers or printers. Note that if you implement VLANs which do not overlap, but still need to communicate, you can connect them by enabled routing on this switch.

Untagged VLANs

Untagged (or static) VLANs are typically used to reduce broadcast traffic and to increase security. A group of network users assigned to a VLAN form a broadcast domain that is separate from other VLANs configured on the switch. Packets are forwarded only between ports that are designated for the same VLAN. Untagged VLANs can be used to manually isolate user groups or subnets.

4.5.3 VLAN Mode

The VLAN Mode Page provide VLAN Mode configuration supported by the Web Smart Switch as the VLAN Mode screen in Figure 4-5-2 appears.

VLAN Mode	
VLAN Mode	☐ Tag VLAN ☒ Group VLAN
Tag Method	☒ By Tag ☐ By Port
Egress Frame	☐ Multicast ☐ Unicast ☐ ARP


Apply

Figure 4-5-2: VLAN Mode Configuration Page Screenshot

The Page includes the following fields:

Object	Description
VLAN Mode	Display the current VLAN mode used by this Web Smart Switch. ■ Tag VLAN determines the VID of each entry and those ports are VLAN members of which VLAN based on the settings of the Tag-based Entry. ■ Group VLAN determines which port in each group is its VLAN member based on the settings of the Group-based Entry.
Tag Method	This option only available in Tag VLAN mode. ■ By Tag- whether packet sent out add/remove tag is judged on the basis of the value set by the port in the Tag-based entry. ■ By Port-whether the port sent out the packet add/remove tag is judged by the tagging value set by the port in the VLAN port config web page
Egress Frame	It could connect the selected packet type via Ingress rule to transport between different VLAN groups. The available options are shown below: ■ Multicast ■ Unicast ■ ARP

Button

A rectangular button with a light gray border and the word "Apply" in a blue, sans-serif font.

: press this button to take effect.

BEWARD

4.5.4 VLAN Group-based Entry Config

■ Adding Static Members to VLANs (VLAN Index)

Use the VLAN Group Member Port to configure port members for the selected VLAN index. The VLAN Group-based Entry Config configuration can be monitored and modified here. Up to 26 VLANs are supported. This page allows for adding and deleting VLANs as well as adding and deleting port members of each VLAN as the VLAN Group-based Entry Config screen in Figure 4-5-3 appears.

Figure 4-5-3: VLAN Group-based Entry Config Configuration Page Screenshot

The page includes the following fields:

Object	Description
Group Name	Configure the Web Smart Switch per VLAN group name information on this web page; the maximum length is 20 characters.
Group Member Port	Assign specific port to per VLAN group. Add : press this button to create a new specific VLAN group. Modify : press this button to modify a specific VLAN group.
Group Table	
Group Name	Display the current group name of VLAN group.
Group Member Port	Display the current group member port number of VLAN group.
Action	Edit : press this button to edit specific VLAN group. Delete : press this button to delete specific VLAN group.

Buttons

Add

: press this button to create a new specific VLAN group.

Modify

: press this button to modify a specific VLAN group.

Edit

: press this button to edit specific VLAN group.

Delete

: press this button to delete specific VLAN group.

4.5.5 VLAN Tag-based Entry Config

Use the VLAN Tag-based entry config to configure port members function for the selected VLAN index. The VLAN Tag-based Entry config configuration can be monitored and modified here. Up to 26 VLANs are supported. This page allows for adding and deleting VLANs as well as configure port members function of each VLAN as the VLAN Tag-based Entry Config screen in Figure 4-5-4 appears.

VLAN Tag-based Entry Config										
Add										
Name	State	VID	Don't care	Add Tag	Remove Tag	Forbidden	Priority	GVRP Forward	Action	
Default	Static	1	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN1	Static	4081	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN2	Static	4082	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN3	Static	4083	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN4	Static	4084	1-18	0	0	0	0	Deny	Edit	Delete
Voice-VLAN	Static	4080	0	0	0	0	0	Deny	Edit	Delete

Figure 4-5-4: VLAN Tag-based Entry Config Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Name	Display the name of specific VLAN group.
• Static	Display the state of specific VLAN group.
• VID	Display the VLAN ID of specific VLAN group.
• Don't care	Display the per port Don't care information of specific VLAN group.
• Add Tag	Display the per port Add Tag state of specific VLAN group.
• Remove Tag	Display the per port Remove Tag state of specific VLAN group.
• Forbidden	Display the per port Forbidden state of specific VLAN group.
• Priority	Display the Priority state of specific VLAN group.

• GVRP Forward	Display the GVRP Forward state of specific VLAN group.
• Action	Edit : press this button to edit specific VLAN group. Delete : press this button to delete specific VLAN group.

Buttons

Add

: press this button to create a new specific VLAN group.

Edit

: press this button to edit specific VLAN group.

Delete

: press this button to delete specific VLAN group.

Press the

Edit

 button to edit per member port state and the screen in [Figure 4-5-5](#) appears.


VLAN Tag-based Entry Config										
Add										
Name	State	VID	Don't care	Add Tag	Remove Tag	Forbidden	Priority	GVRP Forward	Action	
Default	Static	1	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN1	Static	4081	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN2	Static	4082	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN3	Static	4083	1-18	0	0	0	0	Deny	Edit	Delete
Protocol_VLAN4	Static	4084	1-18	0	0	0	0	Deny	Edit	Delete
Voice-VLAN	Static	4080	0	0	0	0	0	Deny	Edit	Delete

Figure 4-5-5: Edit VLAN Tag-based Entry Config Configuration Page Screenshot

The page includes the following fields:

Object	Description
• VLAN Name	Display and configure the name of specific VLAN group; the maximum length is 20 characters.
• VID	Display and configure the VLAN ID of specific VLAN group.
• Priority	Display and configure the Priority value of specific VLAN group.
• GVRP Forward	Display and configure the GVRP Forward mode
• Port	Display per port list of Web Smart Switch.
• Don't care	As a VLAN member of specific VLAN group without any action.
• Add	As a VLAN member, add the Tag action to the packet sent out by this port.
• Remove	As a VLAN member, remove the Tag action to the packet sent out by this port.

• Forbidden	Configure that this port cannot register this Tag VLAN dynamically through GVRP.
• Not Member	Not a member of the VLAN.

ButtonApply

: press this button to take effect.



GVRP (GARP VLAN Registration Protocol) maintains VLAN dynamic registration information for GVRP devices based on the working mechanism of GARP to maintain VLAN dynamic registration information that supports GVRP devices.

And propagate this information to other devices in order to achieve agreement on VLAN information for all devices supporting GVRP in the same LAN.

The VLAN registration information propagated by GVRP includes both local manual static registration information and dynamic registration information from other switches.

4.5.6 VLAN Port Config

This page is used for configuring the Web Smart Switch port VLAN. The VLAN per port configuration page contains fields for managing ports that are part of a VLAN. The port default VLAN ID (PVID) is configured on the VLAN port configuration page. All untagged packets arriving to the device are tagged by the ports PVID.

Understanding Nomenclature of the Switch

■ IEEE 802.1Q Tagged and Untagged

Every port on an 802.1Q compliant switch can be configured as tagged or untagged.

- **Tagged:** Ports with tagging enabled will put the VID number, priority and other VLAN information into the header of all packets that flow into those ports. If a packet has previously been tagged, the port will not alter the packet, thus keeping the VLAN information intact. The VLAN information in the tag can then be used by other 802.1Q compliant devices on the network to make packet-forwarding decisions.
- **Untagged:** Ports with untagging enabled will strip the 802.1Q tag from all packets that flow into those ports. If the packet doesn't have an 802.1Q VLAN tag, the port will not alter the packet. Thus, all packets received by and forwarded by an untagging port will have no 802.1Q VLAN information. (Remember that the PVID is only used internally within the Switch). Untagging is used to send packets from an 802.1Q-compliant network device to a non-compliant network device.

Frame Income Frame Leave	Income Frame is tagged	Income Frame is untagged
Leave port is tagged	Frame remains tagged	Tag is inserted
Leave port is untagged	Tag is removed	Frame remains untagged

Table 4-5-2: Ingress / Egress Port with VLAN VID Tag / Untag table

The VLAN Port configuration screen in Figure 4-5-6 is shown below.

VLAN Port Config

Port Selection

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

PVID

Tag

Force

Uplink

Exclusive

Egress

Ingress-check

GVRP

Ingress-frame

Apply

Port	PVID	Tagging	Force VLAN Group	Uplink	Exclusive	Egress	Ingress Check	GVRP	Ingress Frame
1	1	None					v		All
2	1	None					v		All
3	1	None					v		All
4	1	None					v		All
5	1	None					v		All
6	1	None					v		All
7	1	None					v		All
8	1	None					v		All

Figure 4-5-6 : VLAN Port Config Configuration Page Screenshot

The page includes the following fields:


Object	Description
• Port Selection	Select specific port for VLAN settings.
• PVID	Allow assigned PVID for selected port. The range for the PVID is 1-4094. The PVID will be inserted into all untagged frames entering the ingress port. The PVID must as same as the VLAN ID that the port belongs to VLAN group, or the untagged traffic will be dropped.
• Tag	Set whether VLAN Tag is added or removed from the packet sent out by selected port. The available options are “Add”, “RMV” and “None”.
• Force	Whether or not to set priority according to the group VLAN setting for the action.
• Uplink	Set up the Uplink port, which automatically sends the packet out of the Uplink Port when the destination Port is not the same as the VLAN.
• Exclusive	Enable or disable the exclusive function on specific port, the exclusive port unable to transfer packets.
• Egress	Enable or disable the egress function on specific port, when the destination port of the packet is not in the same VLAN, it can still be transmitted to the destination port via the egress rule.
• Ingress-Check	Enable or disable the ingress check function, check whether port is member of this VLAN through VID.
• GVRP	Enable or disable the port GVRP function.
• Ingress-Frame	Setting allows the specified frame to do the forwarding action. The available options are “Tag-Frame” and “All”.

• Port	Display per port list.
• PVID	Display per port PVID information.
• Tagging	Display per port Tagging information.
• Force VLAN Group	Display per port Force VLAN Group information.
• Uplink	Display per port Uplink information.
• Exclusive	Display per port Exclusive information.
• Egress	Display per port Egress information.
• Ingress Check	Display per port Ingress Check information.
• GVRP	Display per port GVRP information.
• Ingress-Frame	Display per port Ingress Frame information.



The port must be a member of the same VLAN as the Port VLAN ID.

Button



: press this button to take effect.

4.5.7 Protocol VLAN Config

This page is used for configuring the Web Smart Switch Protocol VLAN Config as the Protocol VLAN Config screen in [Figure 4-5-7](#) appears.

Enable	No.	VID	Protocol Type	Protocol Select
☐	1	4081	0x0	Ether_type ▼
☐	2	4082	0x0	Ether_type ▼
☐	3	4083	0x0	Ether_type ▼
☐	4	4084	0x0	Ether_type ▼

Apply

Figure 4-5-7 : Protocol VLAN Config Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Protocol VLAN Enable	Click to activate the Protocol VLAN settings.
• Enable	Select the number of groups to enable.
• No.	Display the groups number.
• VID	Set the VID value and when the packet conforms to the set protocol on this web page, the VLAN member is queried with VID.
• Protocol Type	Set protocol type.
• Protocol Select	Select the Protocol and the available options are shown below: Ether Type: The set value of the protocol type must be greater than 0x0600 when setting Ether Type. Its format is DA+SA+Protocol type. LLC: Its format is DA+SA+Protocol Type. RFC1042: Its format is DA+SA+length+AAAA03+000000+Protocol Type.

Button

Apply

: press this button to take effect.

4.5.8 Q-in-Q Port Config


This page is used for configuring the Web Smart Switch Q-in-Q port VLAN function; the Q-in-Q port VLAN function configuration page contains fields for managing ports that are part of Q-in-Q VLAN.

Understanding Nomenclature of the Switch

■ IEEE 802.1Q Tunneling (Q-in-Q)

IEEE 802.1Q Tunneling (Q-in-Q) is designed for service providers carrying traffic for multiple customers across their networks. QinQ tunneling is used to maintain customer-specific VLAN and Layer 2 protocol configurations even when different customers use the same internal VLAN IDs. This is accomplished by inserting **Service Provider VLAN (SPVLAN)** tags into the customer's frames when they enter the service provider's network, and then stripping the tags when the frames leave the network.

A service provider's customers may have specific requirements for their internal VLAN IDs and number of VLANs supported. VLAN ranges required by different customers in the same service-provider network might easily overlap, and traffic passing through the infrastructure might be mixed. Assigning a unique range of VLAN IDs to each customer would restrict customer configurations, require intensive processing of VLAN mapping tables, and could easily exceed the maximum VLAN limit of 4096.

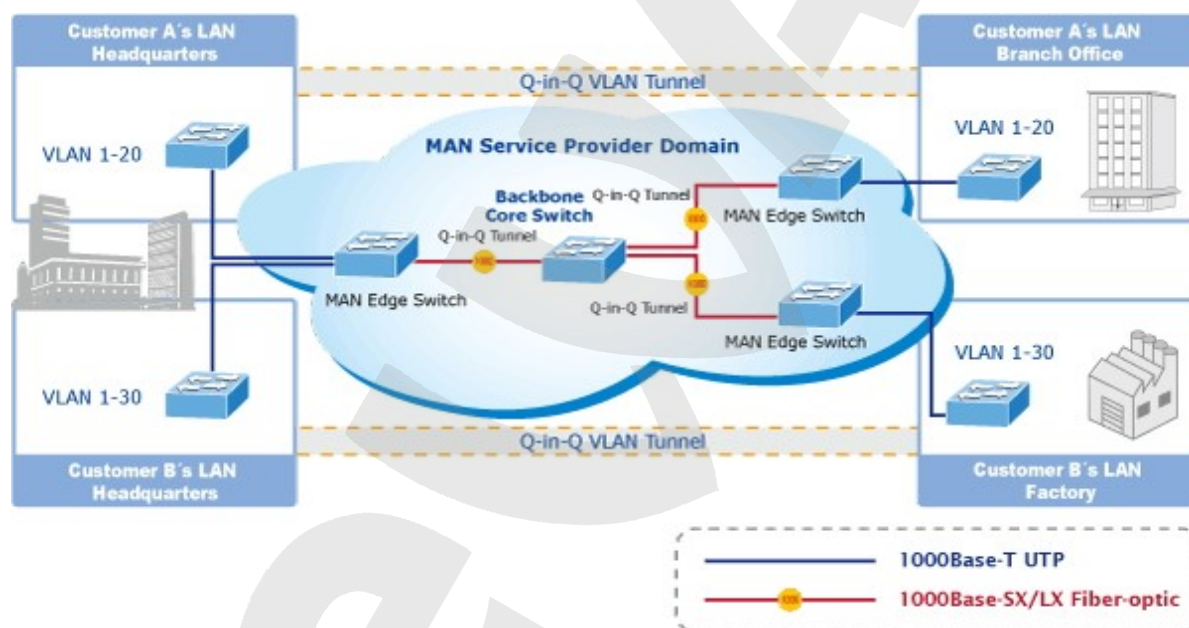

The Web Smart Switch supports multiple VLAN tags and can therefore be used in MAN applications as a provider bridge, aggregating traffic from numerous independent customer LANs into the **MAN (Metro Access Network)** space. One of the purposes of the provider bridge is to recognize and use VLAN tags so that the VLANs in the MAN space can be used independent of the customers' VLANs. This is accomplished by adding a VLAN tag with a MAN-related VID for frames entering the MAN. When leaving the MAN, the tag is stripped and the original VLAN tag with the customer-related VID is again available.

This provides a tunneling mechanism to connect remote customer VLANs through a common MAN space without interfering with the VLAN tags. All tags use EtherType **0x8100** or **0x88A8**, where 0x8100 is used for customer tags and 0x88A8 are used for service provider tags.

In cases where a given service VLAN only has two member ports on the switch, the learning can be disabled for the particular VLAN and can therefore rely on flooding as the forwarding mechanism between the two ports. This way, the MAC table requirements is reduced.

Q-in-Q Port Configuration

The Q-in-Q Port configuration screen in Figure 4-5-8 is shown below.

Port Selection												
1	2	3	4	5	6	7	8	9	10	11	12	13
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
14	15	16	17	18	19	20	21	22	23	24	25	26
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Index:
 Tagging:
 Rx Detect:
 Keep PCP/DEI:

Apply

Port	Index	Tagging	Rx Detect	Keep PCP/DEI
1	1	None		
2	1	None		
3	1	None		
4	1	None		
5	1	None		
6	1	None		
7	1	None		
8	1	None		

Figure 4-5-8 : Q-in-Q Port Configuration Page Screenshot

The page includes the following fields:

Object	Description
Port Selection/Port	Select specific port for Q-in-Q Port configuration./ List per port numbers.
Index	Choose to use the set of indexes in which the service Tag value is placed in the Q-in-Q Index config web page setting. Also display current Index information.
Tagging	Set whether VLAN Tag is added or removed from the packet sent out by selected port. The available options are “Add”, “RMV” and “None”. Add: Do the new service Tag action on the incoming and outgoing packet from this port, if the incoming packet itself has service tag, modify or directly replace the service Tag action depending on whether the RX detect is opened or not. RMV: RX detect enable state to remove service Tag. Also display current Tagging information.
RX Detect	Enable or disable the packet that enters the port to do the service Tag check. Also display current RX Detect information.

- **Keep PCP/DEI**

Set whether to retain the original PCP and DEI values when modifying the service Tag entered into the packet. Also display current Keep PCP/DEI information.

ButtonA rectangular button with a light gray border and the word "Apply" in a blue sans-serif font.

: press this button to take effect.

4.5.9 Q-in-Q Index Config


This page is used for configuring the Web Smart Switch Q-in-Q port VLAN function; the Q-in-Q port VLAN function configuration page contains fields for managing ports that are part of Q-in-Q VLAN.

Understanding Nomenclature of the Switch

■ IEEE 802.1Q Tunneling (Q-in-Q)

IEEE 802.1Q Tunneling (Q-in-Q) is designed for service providers carrying traffic for multiple customers across their networks. Q-in-Q tunneling is used to maintain customer-specific VLAN and Layer 2 protocol configurations even when different customers use the same internal VLAN IDs. This is accomplished by inserting **Service Provider VLAN (SPVLAN)** tags into the customer's frames when they enter the service provider's network, and then stripping the tags when the frames leave the network.

A service provider's customers may have specific requirements for their internal VLAN IDs and number of VLANs supported. VLAN ranges required by different customers in the same service-provider network might easily overlap, and traffic passing through the infrastructure might be mixed. Assigning a unique range of VLAN IDs to each customer would restrict customer configurations, require intensive processing of VLAN mapping tables, and could easily exceed the maximum VLAN limit of 4096.

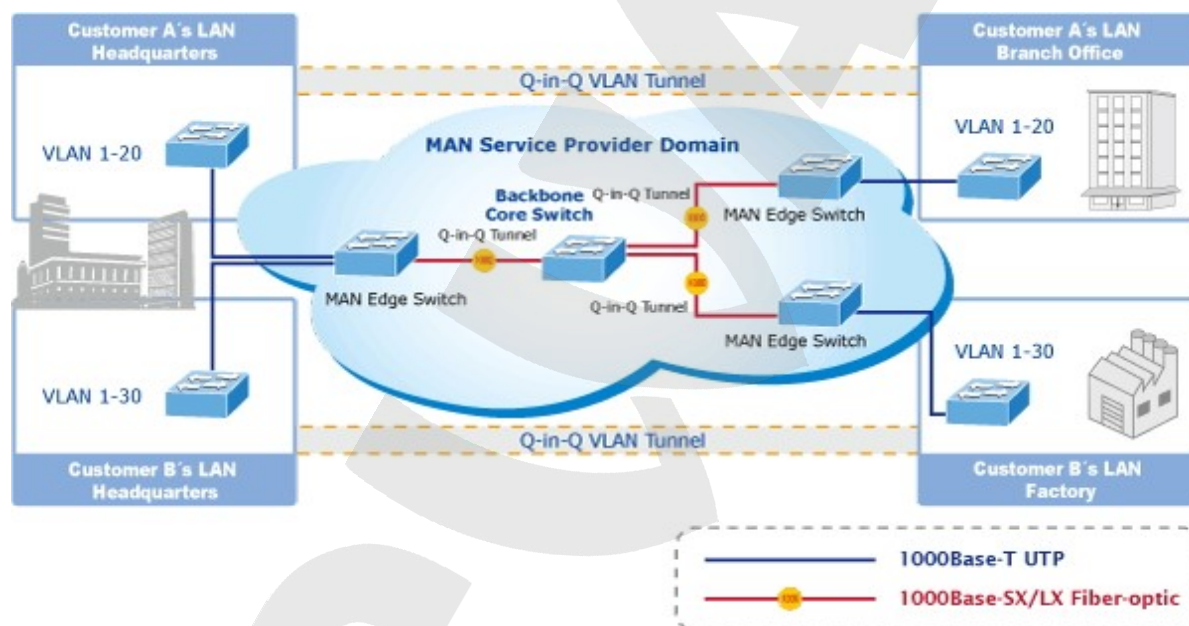

The Web Smart Switch supports multiple VLAN tags and can therefore be used in MAN applications as a provider bridge, aggregating traffic from numerous independent customer LANs into the **MAN (Metro Access Network)** space. One of the purposes of the provider bridge is to recognize and use VLAN tags so that the VLANs in the MAN space can be used independent of the customers' VLANs. This is accomplished by adding a VLAN tag with a MAN-related VID for frames entering the MAN. When leaving the MAN, the tag is stripped and the original VLAN tag with the customer-related VID is again available.

This provides a tunneling mechanism to connect remote customer VLANs through a common MAN space without interfering with the VLAN tags. All tags use EtherType **0x8100** or **0x88A8**, where 0x8100 is used for customer tags and 0x88A8 are used for service provider tags.

In cases where a given service VLAN only has two member ports on the switch, the learning can be disabled for the particular

VLAN and can therefore rely on flooding as the forwarding mechanism between the two ports. This way, the MAC table requirements is reduced.

Q-in-Q Index Configuration

The Q-in-Q Index configuration screen in [Figure 4-5-9](#) appears.

QinQ Index Config

Type: 88A8

Index															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32

Apply

Figure 4-5-9 : Q-in-Q Index Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Type	Set the type value of service Tag.
• Index	Set the service Tag value for each index.

Button

Apply

: press this button to take effect.

4.6 QoS Configuration

4.6.1 Understanding QoS

Quality of Service (QoS) is an advanced traffic prioritization feature that allows you to establish control over network traffic. QoS enables you to assign various grades of network service to different types of traffic, such as multi-media, video, protocol-specific, time critical, and file-backup traffic.

QoS reduces bandwidth limitations, delay, loss, and jitter. It also provides increased reliability for delivery of your data and allows you to prioritize certain applications across your network. You can define exactly how you want the switch to treat selected applications and types of traffic. You can use QoS on your system to:

- Control a wide variety of network traffic by:
- Classifying traffic based on packet attributes.
- Assigning priorities to traffic (for example, to set higher priorities to time-critical or business-critical applications).
- Applying security policy through traffic filtering.
- Provide predictable throughput for multimedia applications such as video conferencing or voice over IP by minimizing delay and jitter.
- Improve performance for specific types of traffic and preserve performance as the amount of traffic grows.
- Reduce the need to constantly add bandwidth to the network.
- Manage network congestion.

QoS Terminology

- **Classifier**—classifies the traffic on the network. Traffic classifications are determined by protocol, application, source, destination, and so on. You can create and modify classifications. The Switch then groups classified traffic in order to schedule them with the appropriate service level.
- **DiffServ Code Point (DSCP)** — is the traffic prioritization bits within an IP header that are encoded by certain applications and/or devices to indicate the level of service required by the packet across a network.
- **Service Level**—defines the priority that will be given to a set of classified traffic. You can create and modify service levels.
- **Policy**—comprises a set of “rules” that are applied to a network so that a network meets the needs of the business. That is, traffic can be prioritized across a network according to its importance to that particular business type.
- **QoS Profile**—consists of multiple sets of rules (classifier plus service level combinations). The QoS profile is assigned to a port(s).
- **Rules**—comprises a service level and a classifier to define how the Switch will treat certain types of traffic. Rules are associated with a QoS Profile (see above).

To implement QoS on your network, you need to carry out the following actions:

1. Define a service level to determine the priority that will be applied to traffic.
2. Apply a classifier to determine how the incoming traffic will be classified and thus treated by the Switch.
3. Create a QoS profile which associates a service level and a classifier.
4. Apply a QoS profile to a port(s).

On the Access QoS configuration web page, you can view QoS management function information of the Web Smart Switch as the screen in [Figure 4-6-1](#) appears.

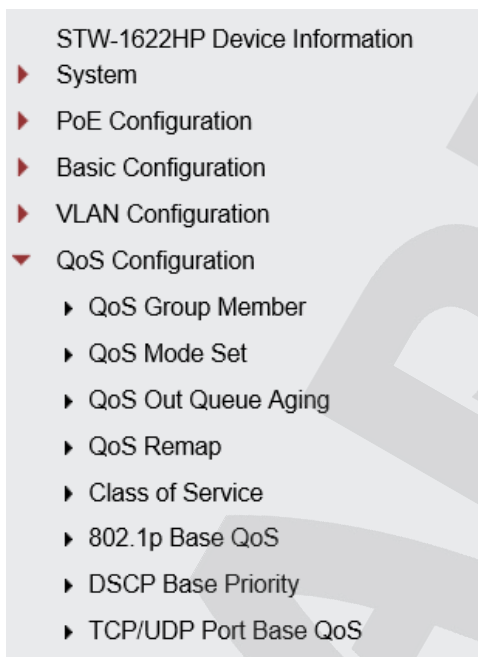


Figure 4-6-1: Web Smart Switch QoS Configuration Web Page

QoS Configuration	
Item	Description
QoS Group Member	Configure QoS Group Member configuration settings on this web page.
QoS Mode Set	Configure QoS Mode Set configuration settings on this web page.
QoS Out Queue Aging	Display and configure QoS Out Queue Aging settings on this web page.
QoS Remap	Display and configure QoS Remap settings on this web page.
Class of Service	Display and configure QoS Class of Service settings on this web page.
802.1p-based QoS	Display and configure 802.1p-based QoS settings on this web page.
DSCP-based Priority	Display and configure DSCP-based Priority settings on this web page.
TCP/UDP Port-based QoS	Display and configure TCP/UDP Port-based QoS settings on this web page.

Table 4-6-1: Descriptions of QoS Configuration

4.6.2 QoS Group Member

This page allows you to configure the QoS group member for all switch ports as the QoS group member screen in [Figure 4-6-2](#) appears.

Port	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Group A	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
Group B	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Apply


Group	Member Port
A	1-18
B	0

Figure 4-6-2: QoS Group Member Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port	Display per port list.
• Group A	Allow assigning specific port to Group A.
• Group B	Allow assigning specific port to Group B.
• Group	Display Group A and Group B.
• Member Port	Display Member Port setting on Group A and Group B.

Button



: press this button to take effect.

4.6.3 QoS Mode Set

This page allows you to configure the QoS mode settings for Web Smart Switch as the QoS mode settings screen in Figure 4-6-3 appears.

QoS Mode Set

Group	Queue Mode	Queue Method	Queue Ratio (0-255)	Queue Max Bandwidth (0-255)	Unit (BW Throttle Period / TWRR Tickle Unit)
A	First-In-First-Out ▼	WRR ▼	Q0: 0 Q1: 0 Q2: 0 Q3: 0 Q4: 0 Q5: 0 Q6: 0 Q7: 0	Q0: 0 Q1: 0 Q2: 0 Q3: 0 Q4: 0 Q5: 0 Q6: 0 Q7: 0	64Kbps / 51.2ms ▼
B	First-In-First-Out ▼	WRR ▼	Q0: 0 Q1: 0 Q2: 0 Q3: 0 Q4: 0 Q5: 0 Q6: 0 Q7: 0	Q0: 0 Q1: 0 Q2: 0 Q3: 0 Q4: 0 Q5: 0 Q6: 0 Q7: 0	64Kbps / 51.2ms ▼

Apply

Figure 4-6-3 : QoS Mode Set Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Group	Display Group A and Group B.
• Queue Mode	Select the Queue Mode for QoS and the available options are shown below: First-In-First-Out WRR/WFQ/Bwassurance/Bwlimit/TWRR SPx1 WRR/WFQ/Bwassurance/Bwlimit/TWRRx7 SPx2 WRR/WFQ/Bwassurance/Bwlimit/TWRRx6 SPx4 WRR/WFQ/Bwassurance/Bwlimit/TWRRx4 SPx8
• Queue Method	Select the Queue Method for QoS and the available options are shown below: WRR WFQ Bwassurance Bwlimit TWRR
• Queue Ratio (0-255)	Set Queue Ratio for each mode and the available range is 0-255 .
• Queue Maximum Bandwidth (0-255)	Set Queue maximum bandwidth and the available range is 0-255 .
• Unit (BW Throttle Period/TWRR Tickle Unit)	Set Queue Ratio Unit for each mode and the available options are shown below: 64Kbps/51.2ms 1Mbps/3.1ms 2Mbps/1.55ms 4Mbps/0.82ms

Button

Apply

: press this button to take effect.

4.6.4 QoS Out Queue Aging

This page allows you to configure the QoS Out Queue Aging settings for all switch ports as the QoS Out Queue Aging screen in Figure 4-6-4 appears.

Figure 4-6-4: QoS Out Queue Aging Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Out Queue Aging Time	Set Out Queue Aging time and the available range is 0-255 .
• Fast Aging Time Enable	Set the conversion unit of aging time from 100ms to 1.638ms .
• Port Selection	Select specific port for QoS Out Queue Aging settings.
• Q0 ~ Q7	Enable or disable the QoS Out Queue Aging settings.
• Port No.	Display per port list.
• Q0-Q7	Display per port QoS Out Queue Aging settings.

Button

Apply

: press this button to take effect.

4.6.5 QoS Remap

This page allows you to configure the QoS Remap settings for all switch ports as the QoS Remap screen in [Figure 4-6-5](#) appears.

QoS Remap

Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Mode: **Tx&Rx** | Q0: -- | Q1: -- | Q2: -- | Q3: -- | Q4: -- | Q5: -- | Q6: -- | Q7: -- Apply

Port No.	Tx Remap								Rx Remap							
	Q0	Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q0	Q1	Q2	Q3	Q4	Q5	Q6	Q7
01	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
02	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
03	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
04	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
05	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
06	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
07	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7
08	0	1	2	3	4	5	6	7	0	1	2	3	4	5	6	7

Figure 4-6-5: QoS Remap Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	Select specific port for QoS Remap settings.
• Mode	Set operation mode for specific port and the available options are shown as below: Tx&Rx Tx Rx
• Q0 ~Q7	Set each queue to the queue number of QoS Remap.
• Port No.	Display per port list.
• TX Remap Q0-Q7	Display per port queue number of Q0 to Q7 from TX Remap.
• RX Remap Q0-Q7	Display per port queue number of Q0 to Q7 from RX Remap.

Button

Apply

: press this button to take effect.

4.6.6 Class of Service


This page allows you to configure the QoS Class of Service settings for all switch ports as the QoS Class of Service screen in Figure 4-6-6 appears.

Figure 4-6-6: QoS Class of Service Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	Select specific port for QoS Class of Service settings.
• ACL	Enable or disable the ACL function for specific port. Also display per port ACL status.
• IGMP	Enable or disable the IGMP function for specific port. Also display per port ICMP status.
• IP Addr	Enable or disable the IP Address function for specific port. Also display per port IP Address status.
• MAC Addr	Enable or disable the MAC Address function for specific port. Also display per port MAC Address status.
• VID	Enable or disable the VID function for specific port. Also display per port VID status.
• TCP/UDP Port	Enable or disable the TCP/UDP Port function for specific port. Also display per port TCP/UDP Port status.
• DSCP	Enable or disable the DSCP function for specific port. Also display per port DSCP status.
• 802.1p	Enable or disable the 802.1p function for specific port. Also display per port 802.1p status.
• Physical Port	Select Queue ratio for specific port and the available range is Queue0-Queue7 . Also display per port Queue status.
• Port No.	Display per port list.


Button



: press this button to take effect.

4.6.7 802.1p-based QoS

This page allows you to configure the 802.1p-based QoS settings for Web Smart Switch as the 802.1p-based QoS screen in Figure 4-6-7 appears.

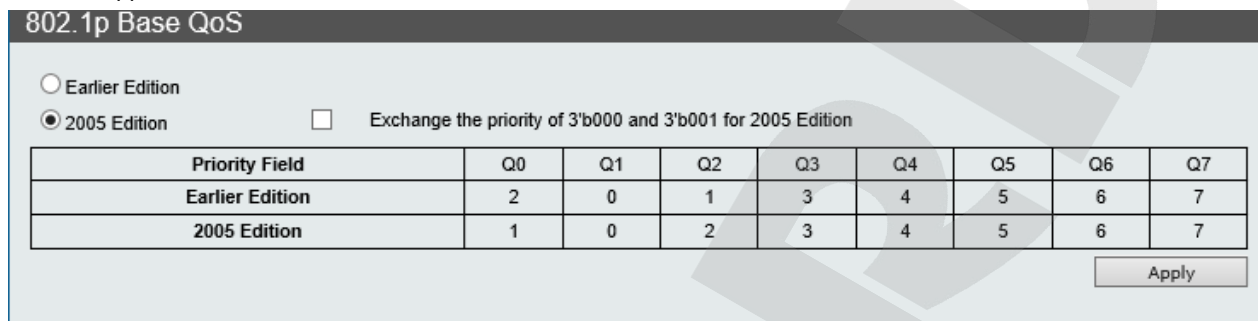

The screenshot shows the '802.1p Base QoS' configuration page. It includes two radio buttons: 'Earlier Edition' and '2005 Edition' (which is selected). There is a checkbox labeled 'Exchange the priority of 3'b000 and 3'b001 for 2005 Edition'. Below these is a table with priority fields Q0 through Q7. The 'Earlier Edition' row shows values 2, 0, 1, 3, 4, 5, 6, 7. The '2005 Edition' row shows values 1, 0, 2, 3, 4, 5, 6, 7. An 'Apply' button is at the bottom right.


Priority Field	Q0	Q1	Q2	Q3	Q4	Q5	Q6	Q7
Earlier Edition	2	0	1	3	4	5	6	7
2005 Edition	1	0	2	3	4	5	6	7

Figure 4-6-7: 802.1p-based QoS Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Earlier Edition	Click to select the Earlier Edition for 802.1p-based QoS.
• 2005 Edition	Click to select the 2005 Edition for 802.1p-based QoS.
• Exchange the priority of 3'b001 for 2005 Edition	Click to select the Exchange the priority of 3'b001 for 2005 Edition for 802.1p-base QoS.
• Priority Field	Display priority field of Q0 to Q7.
• Earlier Edition	Display earlier edition for 802.1p-based QoS.
• 2005 Edition	Display 2005 edition for 802.1p-based QoS.

Button



: press this button to take effect.

4.6.8 DSCP-based Priority

This page allows you to configure the DSCP-based Priority settings for Web Smart Switch as the DSCP-based Priority screen in Figure 4-6-8 appears.

DSCP Base Priority

Priority For DSCP Not Match

☒ Regard as low priority (priority 0)
☐ Ignore IP priority (priority will according to tag/port)

Apply

IP ToS/DSCP CoS Base Priority

DSCP List: DSCP1 ▼
 Value(0-63):
 Priority: Q0 ▼

Apply


List	Value	Priority
DSCP1	0	Queue7
DSCP2	0	Queue7
DSCP3	0	Queue7
DSCP4	0	Queue7
DSCP5	0	Queue7
DSCP6	0	Queue7
DSCP7	0	Queue7
DSCP8	0	Queue7

Figure 4-6-8: DSCP-based Priority Configuration Page Screenshot

The page includes the following fields:

Object	Description
Priority For DSCP Not Match	Provide two options for selection. Regard as low priority (priority 0) Ignore IP priority (priority will according to tag/port)
IP ToS/DSCP CoS Base Priority	Provide three functions for setting. DSCP List: provide DSCP1 to DSCP8 options to choose. Value(0-63): allow input the value range from 0 to 63. Priority: provide Q0 to Q7 options to choose.
List	Display DSCP1 to DSCP8.
Value	Display the value setting of per DSCP1 to DSCP8.
Priority	Display the priority setting of per DSCP1 to DSCP8.

Button



: press this button to take effect.

4.6.9 TCP/UDP Port-based QoS

This page allows you to configure the TCP/UDP Port-based QoS settings for Web Smart Switch as the TCP/UDP Port-based QoS screen in [Figure 4-6-9](#) appears.

TCP/UDP Port Base QoS

TCP/UDP Port Base Priority

NOTE:

(1)Q0~Q7 options are effective for the selected physical port only.
(2)"Drop" option is the global setting for all physical ports.
(3)"BOOTP/DHCP" is not effective when DHCP relay agent enabled.

Protocol	Priority	Protocol	Priority	Protocol	Priority	Protocol	Priority
FTP	Q0 ▼	SSH	Q0 ▼	TELNET	Q0 ▼	SMTP	Q0 ▼
DNS	Q0 ▼	BOOTP/DHCP	Q0 ▼	TFTP	Q0 ▼	HTTP_0,1	Q0 ▼
POP3	Q0 ▼	NEWS	Q0 ▼	SNTP	Q0 ▼	NETBIOS_0,1,2	Q0 ▼
IMAP_0,1	Q0 ▼	SNMP_0,1	Q0 ▼	HTTPS	Q0 ▼	User Defined A	Q0 ▼
User Defined B	Q0 ▼	User Defined C	Q0 ▼	User Defined D	Q0 ▼		

User Define TCP/UDP Port Number

NOTE:

These User-Defined TCP/UDP port are the same as that used in TCP/UDP filter.


User Defined A	User Defined B	User Defined C	User Defined D
Port:	Port:	From Port: To Port:	From Port: To Port:

Figure 4-6-9: TCP/UDP Port-based QoS Configuration Page Screenshot

The page includes the following fields:

Object	Description
TCP/UDP Port-based Priority	Provides Q0 to Q7 and Drop options for the following protocols. FTP/SSH/SMTP/DNS/BOOTP/DHCP/TFTP/HTTP_0.1/POP3/NEWS/ SNTP/NETBIOS_0.1.2/IMAP_0.1/SNMP_0.1/HTTPS/User Defined A/ User Defined B/ User Defined C/ User Defined D.
User Defined TCP/UDP Port Number	Provides four functions for setting. User Defined A (Port #) User Defined B (Port #) User Defined C (From Port# To Port#) User Defined D (From Port# To Port#)

Button



: press this button to take effect.

4.7 ACL Configuration

4.7.1 Understanding ACL

ACL is an acronym for Access Control List. It is the list table of ACEs, containing access control entries that specify individual users or groups permitted or denied to specific traffic objects, such as a process or a program.

Each accessible traffic object contains an identifier to its ACL. The privileges determine whether there are specific traffic object access rights.

ACL implementations can be quite complex, for example, when the ACEs are prioritized for the various situation. In networking, the ACL refers to a list of service ports or network services that are available on a host or server, each with a list of hosts or servers permitted or denied to use the service. ACL can generally be configured to control inbound traffic, and in this context, they are similar to firewalls.

ACE is an acronym for Access Control Entry. It describes access permission associated with a particular ACE ID.

There are three ACE frame types (Ethernet Type, ARP, and IPv4) and two ACE actions (permit and deny). The ACE also contains many detailed, different parameter options that are available for individual application.

On the Access ACL configuration web page, you can view ACL management function information of the Web Smart Switch as the screen in [Figure 4-7-1](#) appears.

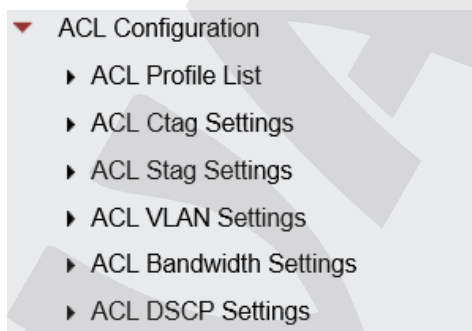


Figure 4-7-1: Web Smart Switch ACL Configuration Web Page

ACL Configuration	
Item	Description
ACL Profile List	Configure and display ACL Profile List configuration settings on this web page.
ACL Ctag Settings	Configure and display ACL Ctag Settings configuration settings on this web page.
ACL Stag Settings	Configure and display ACL Stag Settings configuration settings on this web page.
ACL VLAN Settings	Configure and display ACL VLAN Settings configuration settings on this web page.
ACL Bandwidth Settings	Configure and display ACL Bandwidth Settings configuration settings on this web page.
ACL DSCP Settings	Configure and display ACL DSCP Settings configuration settings on this web page.

Table 4-7-1: Descriptions of ACL Configuration

4.7.2 ACL Profile List

This page allows you to configure the ACL Profile List settings for Web Smart Switch as the ACL Profile List screen in [Figure 4-7-2](#) appears.

ACL Profile List

Used Entries : 0 / 128

Profile Name

Type MAC ▼

Add

Profile Name	Type	Action
--------------	------	--------

Figure 4-7-2: ACL Profile List Configuration Page Screenshot

The page includes the following fields:

Object	Description
• User Entries	Display the amount of entry occupied by rules that has been set up successfully, with a maximum of 128. It is not a rule that takes up an entry; the number of entries occupied by a rule is automatically calculated according to the setting.
• Profile Name	Display and configure the name of a specific ACL Profile; the maximum length is 20 characters.
• Type	Indicates the frame type of the ACL Profile. Possible values are: MAC : The ACL will match the MAC address. IP : The ACL will match all IPv4 frames. IP_Ext : The ACL will match all IPv4 frames with VID/CoS/TCP Flag/ DSCP/IP protocol. IPv6 : The ACL will match all IPv6 standard frames. Advanced : The ACL will match all MAC address and IPv4 frames with VID/CoS/TCP Flag/ DSCP/IP protocol.
• Action	Indicates the forwarding action of the ACL Profile. Edit : press this button to edit the specific ACL Profile. Delete : press this button to delete the specific ACL Profile.

Buttons

Add : press this button to complete the add ACL Profile procedure.

Edit : press this button to edit the specific ACL Profile.

Delete : press this button to delete the specific ACL Profile.

4.7.2.1 MAC

The Access Control List configuration includes the function that is based on MAC address as the screen in [Figure 4-7-3](#) appears.

ACL Profile Configuration - MAC

Name		11
☐	Source MAC Address	22:55:66:AA:BB:cc (22:55:66:AA:BB:cc)
	Source MAC Mask	FF:FF:FF:FF:FF:FF v
☐	Destination MAC Address	22:55:66:AA:BB:cc (22:55:66:AA:BB:cc)
	Destination MAC Mask	FF:FF:FF:FF:FF:FF v
☐	VID	1 (1 ~ 4094)
☐	CoS	0 (0 ~ 7, VID should enabled)
☐	Ethernet Type	0x 0000 (0000 ~ FFFF, hexadecimal value)
☐	Ingress Port	Port1 v
Action		Drop v

Figure 4-7-3: ACL Profile List-MAC Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Name	Display the ACL profile name.
• Source MAC Address	Configure the Source MAC Address.
• Source MAC Mask	Configure the Source MAC Mask and the available options are shown below: FF:FF:FF:FF:FF:FF FF:FF:FF:00:00:00 FF:FF:00:00:00:00
• Destination MAC Address	Configure the Destination MAC Address.
• Destination MAC Mask	Configure the Destination MAC Mask and the available options are shown below: FF:FF:FF:FF:FF:FF FF:FF:FF:00:00:00 FF:FF:00:00:00:00
• VID	Configure the VID and the available range is 1-4094 .
• CoS	Configure the CoS and the available range is 0-7 .
• Ethernet Type	Configure the Ethernet Type.
• Ingress Port	Select the specific port as Ingress port.
• Action	Select the action and the available options are shown below: Drop Type 1 Type 2

Button

: press this button to take effect.

4.7.2.2 IP

The Access Control List configuration includes the function that is based on IP address as the screen in Figure 4-7-4 appears.

ACL Profile Configuration - IP

Name		11	
☐	Source IP Address	192.168.0.1	(192.168.0.1)
	Source IP Mask	255.255.255.255	255.255.255.255 ▼
☐	Source Port Range	Low: 0 (0 ~ 65535)	High: 65535 (0 ~ 65535)
☐	Destination Port Range	Low: 0 (0 ~ 65535)	High: 65535 (0 ~ 65535)
☐	Ingress Port	Port1 ▼	
Action		Drop ▼	

Figure 4-7-4: ACL Profile List-IP Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Name	Display the ACL profile name.
• Source IP Address	Configure the Source IP Address.
• Source IP Mask	Configure the Source IP Mask and the available options are shown below: 255:255:255:255 255:255:255:240 255:255:255:0 255:255:240:0 255.255:0:0 255.0.0.0 240.0.0.0
• Source Port Range	Configure the Source Port Range of Low and High.
• Destination Port Range	Configure the Destination Port Range of Low and High.
• Ingress Port	Select the specific port as Ingress port.
• Action	Select the action and the available options are shown below: Drop Type 1 Type 2

Button

: press this button to take effect.

4.7.2.3 IP_EXT

The Access Control List configuration includes the function that is based on IP address extension as the screen in [Figure 4-7-5](#) appears.

ACL Profile Configuration - IP Extension


Name		11
☐	Source IP Address	192.168.0.1 (192.168.0.1)
	Source IP Mask	255.255.255.255 255.255.255.255 ▼
☐	Destination IP Address	192.168.0.1 (192.168.0.1)
	Destination IP Mask	255.255.255.255 255.255.255.255 ▼
☐	Source Port	☐ 0 (0 ~ 65535) ☐ Low: 0 (0 ~ 65535) High: 65535 (0 ~ 65535)
☐	Destination Port	☐ 0 (0 ~ 65535) ☐ Low: 0 (0 ~ 65535) High: 65535 (0 ~ 65535)
☐	VID	1 (1 ~ 4094)
☐	CoS	0 (0 ~ 7, VID should enabled)
☐	TCP Flag	☐ URG ☐ ACK ☐ PSH ☐ RST ☐ SYN ☐ FIN ☐ 0 ☐ 0 ☐ 0 ☐ 0 ☐ 0 ☐ 0 ☐ 1 ☐ 1 ☐ 1 ☐ 1 ☐ 1 ☐ 1
☐	DSCP	0 (0 ~ 63)
☐	IP Protocol	0x 0 (00 ~ FF)
☐	Ingress Port	Port1 Port1 ▼
Action		Drop ▼

Figure 4-7-5: ACL Profile List-IP Address Extension Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Name	Display the ACL profile name.
• Source IP Address	Configure the Source IP Address.
• Source IP Mask	Configure the Source IP Mask and the available options are shown below: 255:255:255:255 255:255:255:240 255:255:255:0 255:255:240:0 255.255:0:0 255.0.0.0 240.0.0.0
• Destination IP Address	Configure the Destination IP Address.
• Destination IP Mask	Configure the Destination IP Mask and the available options are shown below: 255:255:255:255 255:255:255:240 255:255:255:0 255:255:240:0

	255.255:0:0 255.0.0.0 240.0.0.0
• Source Port	Configure the Source Port of Low and High.
• Destination Port	Configure the Destination Port of Low and High.
• VID	Configure the VID and the available range is 1-4094 .
• CoS	Configure the CoS and the available range is 0-7 .
• TCP Flag	Configure the TCP Flag and available options are shown below: URG/0/1 ACK/0/1 PSH/0/1 RST/0/1 SYN/0/1 FIN/0/1
• DSCP	Configure the DSCP and the available range is 0-63 .
• IP Protocol	Configure the IP Protocol.
• Ingress Port	Select the specific port as Ingress port.
• Action	Select the action and the available options are shown below: Drop Type 1 Type 2

Button

 Apply

: press this button to take effect.

4.7.2.4 IPv6

The Access Control List configuration includes the function that is based on IPv6 address as the screen in [Figure 4-7-6](#) appears.

ACL Profile Configuration - IPv6

Name		11
☐	Source IPv6 Address	(AAAA:::DDDD)
	Source IPv6 Mask	FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF ▼
☐	Destination IPv6 Address	(AAAA:::DDDD)
	Destination IPv6 Mask	FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF ▼
☐	Ingress Port	Port1 ▼
Action		Drop ▼
Apply		

Figure 4-7-6: ACL Profile List-IPv6 Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Name	Display the ACL profile name.
• Source IPv6 Address	Configure the Source IPv6 Address.
• Source IPv6 Mask	Configure the Source IPv6 Mask and the available options are shown below: FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:0000:0000 FFFF:FFFF:FFFF:0000:0000:0000:0000:0000 FFFF:0000:0000:0000:0000:0000:0000:0000
• Destination IPv6 Address	Configure the Destination IPv6 Address.
• Destination IPv6 Mask	Configure the Destination IPv6 Mask and the available options are shown below: FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:FFFF FFFF:FFFF:FFFF:FFFF:FFFF:FFFF:0000:0000 FFFF:FFFF:FFFF:0000:0000:0000:0000:0000 FFFF:0000:0000:0000:0000:0000:0000:0000
• Ingress Port	Select the specific port as Ingress port.
• Action	Select the action and the available options are shown below: Drop Type 1 Type 2

Button

Apply

: press this button to take effect.

4.7.2.5 Advanced

The Access Control List configuration includes the function that is based on IPv6 address as the screen in [Figure 4-7-7](#) appears.

Name		Advanced	
☐	Source MAC Address	22:55:66:AA:BB:cc	(22:55:66:AA:BB:cc)
	Source MAC Mask	FF:FF:FF:FF:FF:FF	FF:FF:FF:FF:FF:FF ▼
☐	Destination MAC Address	22:55:66:AA:BB:cc	(22:55:66:AA:BB:cc)
	Destination MAC Mask	FF:FF:FF:FF:FF:FF	FF:FF:FF:FF:FF:FF ▼
☐	Source IP Address	192.168.0.1	(192.168.0.1)
	Source IP Mask	255.255.255.255	255.255.255.255 ▼
☐	Destination IP Address	192.168.0.1	(192.168.0.1)
	Destination IP Mask	255.255.255.255	255.255.255.255 ▼
☐	Source Port	☐ 0 ~ 65535 ☐ Low: 0 ~ 65535 High: 0 ~ 65535	(0 ~ 65535)
☐	Destination Port	☐ 0 ~ 65535 ☐ Low: 0 ~ 65535 High: 0 ~ 65535	(0 ~ 65535)
☐	VID	1 ~ 4094	(1 ~ 4094)
☐	CoS	0 ~ 7, VID should enabled	(0 ~ 7, VID should enabled)
☐	Ethernet Type	0x 0000 ~ FFFF, hexadecimal value	(0000 ~ FFFF, hexadecimal value)
☐	TCP Flag	☐ URG ☐ ACK ☐ PSH ☐ RST ☐ SYN ☐ FIN ☐ 0 ☐ 0 ☐ 0 ☐ 0 ☐ 0 ☐ 0 ☐ 1 ☐ 1 ☐ 1 ☐ 1 ☐ 1 ☐ 1	
☐	DSCP	0 ~ 63	(0 ~ 63)
☐	IP Protocol	0x 00 ~ FF	(00 ~ FF)
☐	Ingress Port	Port1	Port1 ▼
Action Drop			


Figure 4-7-7: ACL Profile List-IPv6 Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Name	Display the ACL profile name.
• Source MAC Address	Configure the Source MAC Address.
• Source MAC Mask	Configure the Source MAC Mask and the available options are shown below: FF:FF:FF:FF:FF:FF FF:FF:FF:00:00:00 FF:FF:00:00:00:00
• Destination MAC Address	Configure the Destination MAC Address.
• Destination MAC Mask	Configure the Destination MAC Mask and the available options are shown below: FF:FF:FF:FF:FF:FF FF:FF:FF:00:00:00 FF:FF:00:00:00:00

• Source IP Address	Configure the Source IP Address.
• Source IP Mask	Configure the Source IP Mask and the available options are shown below: 255:255:255:255 255:255:255:240 255:255:255:0 255:255:240:0 255.255:0:0 255.0.0.0 240.0.0.0
• Destination IP Address	Configure the Destination IP Address.
• Destination IP Mask	Configure the Destination IP Mask and the available options are shown below: 255:255:255:255 255:255:255:240 255:255:255:0 255:255:240:0 255.255:0:0 255.0.0.0 240.0.0.0
• Source Port	Configure the Source Port of Low and High.
• Destination Port	Configure the Destination Port of Low and High.
• VID	Configure the VID, the available range is 1-4094 .
• CoS	Configure the CoS, the available range is 0-7 .
• Ethernet Port	Configure the Ethernet Type.
• TCP Flag	Configure the TCP Flag and available options are shown below: URG/0/1 ACK/0/1 PSH/0/1 RST/0/1 SYN/0/1 FIN/0/1
• DSCP	Configure the DSCP and the available range is 0-63 .
• IP Protocol	Configure the IP Protocol.
• Ingress Port	Select the specific port as Ingress port.
• Action	Select the action and the available options are shown below: Drop Type 1 Type 2 Type 3 Type 4

Button


 Apply

: press this button to take effect.

4.7.3 ACL Ctag Settings

This page allows you to configure the ACL Ctag settings for Web Smart Switch as the ACL Ctag settings configuration screen in [Figure 4-7-8](#) appears.

ACL Ctag Settings

Index (1 ~ 24)

Value 0x (0x0000~0x7FFF)

Index	Value	Index	Value
1	0x0000	13	0x0000
2	0x0000	14	0x0000
3	0x0000	15	0x0000
4	0x0000	16	0x0000
5	0x0000	17	0x0000
6	0x0000	18	0x0000
7	0x0000	19	0x0000
8	0x0000	20	0x0000
9	0x0000	21	0x0000
10	0x0000	22	0x0000
11	0x0000	23	0x0000
12	0x0000	24	0x0000

Figure 4-7-8: ACL Ctag Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Index	Select specific index for ACL Ctag settings, the available range is 1 to 24 .
• Value	Configure and indicate per index value of the ACL Ctag settings; the value must be hexadecimal and available range is 0x0000 to 0x7FFF .

Button

: press this button to take effect.

4.7.4 ACL Stag Settings

This page allows you to configure the ACL Stag settings for Web Smart Switch as the ACL Stag settings configuration screen in Figure 4-7-9 appears.

ACL Stag Settings

Index (1 ~ 24)

Value 0x (0x0000~0xFFFF)

Index	Value	Index	Value
1	0x0000	13	0x0000
2	0x0000	14	0x0000
3	0x0000	15	0x0000
4	0x0000	16	0x0000
5	0x0000	17	0x0000
6	0x0000	18	0x0000
7	0x0000	19	0x0000
8	0x0000	20	0x0000
9	0x0000	21	0x0000
10	0x0000	22	0x0000
11	0x0000	23	0x0000
12	0x0000	24	0x0000

Figure 4-7-9: ACL Stag Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Index	Select specific index for ACL Stag settings and the available range is 1 to 24 .
• Value	Configure and indicate per index value of the ACL Stag settings; the value must be hexadecimal and available range is 0x0000 to 0xFFFF .

Button

: press this button to take effect.

4.7.5 ACL VLAN Settings

This page allows you to configure the ACL VLAN settings for Web Smart Switch as the ACL VLAN settings configuration screen in [Figure 4-7-10](#) appears.

ACL VLAN Settings

Index 1

Member Port

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Apply

Index	Member Port	Index	Member Port
1		13	
2		14	
3		15	
4		16	
5		17	
6		18	
7		19	
8		20	
9		21	
10		22	
11		23	
12		24	

Figure 4-7-10: ACL VLAN Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Index	Select specific index for ACL VLAN settings; the available range is 1 to 24 .
• Member Port	Configure and indicate per index member port of the ACL VLAN settings.

Button

Apply

: press this button to take effect.

4.7.6 ACL Bandwidth Settings

This page allows you to configure the ACL bandwidth settings for Web Smart Switch as the ACL bandwidth settings configuration screen in [Figure 4-7-11](#) appears.

Index	Value
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0
11	0
12	0
13	0
14	0
15	0

Figure 4-7-11: ACL Bandwidth Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Index	Configure specific index for ACL bandwidth settings; the available range is 1 to 15 .
• Value	Configure and indicate per index value of the ACL bandwidth settings; the value available range is 0 to 2540 .

Button

Apply

: press this button to take effect.

4.7.7 ACL DSCP Settings

This page allows you to configure the ACL DSCP settings for Web Smart Switch as the ACL DSCP settings configuration screen in [Figure 4-7-12](#) appears.

ACL DSCP Settings

Index (1 ~ 8)
 Value 0x (0x0~0x3F)


Index	Value
1	0x00
2	0x00
3	0x00
4	0x00
5	0x00
6	0x00
7	0x00
8	0x00

Figure 4-7-12: ACL DSCP Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Index	Configure specific index for ACL DSCP settings; the available range is 1 to 8 .
• Value	Configure and indicate per index value of the ACL DSCP setting; the value must be hexadecimal and available range is 0x0 to 0x3F .

Button



: press this button to take effect.

4.8 Security

On the Access Security configuration web page, you can view and configure Security functions of the Web Smart Switch as the screen in [Figure 4-8-1](#) appears:

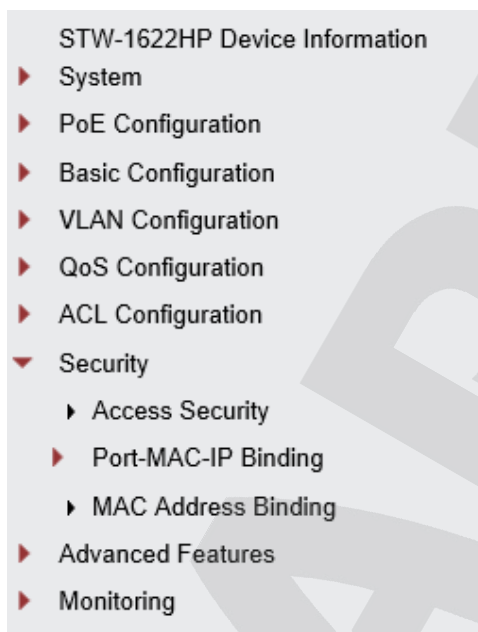



Figure 4-8-1: Web Smart Switch Security Configuration Web Page

Security Configuration	
Item	Description
Access Security	Configure and display Access Security configuration settings on this web page.
Port-MAC-IP Binding	Configure and display Port-MAC-IP Binding configuration settings on this web page.
MAC Address Binding	Configure and display MAC Address Binding configuration settings on this web page.

Table 4-8-1: Descriptions of Security Configuration

4.8.1 Access Security

This page allows you to configure the Access Security settings for Web Smart Switch as the Access Security configuration screen in [Figure 4-8-2](#) appears.

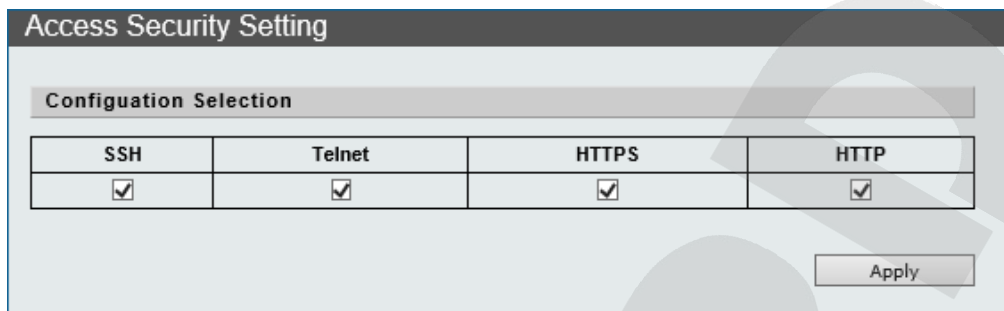

SSH	Telnet	HTTPS	HTTP
☒	☒	☒	☒


Apply

Figure 4-8-2: Access Security Configuration Page Screenshot

The page includes the following fields:

Object	Description
• SSH	Configure enable or disable the SSH function and default mode is enable.
• HTTPS	Configure enable or disable the HTTPS function and default mode is enable.
• HTTP	Configure enable or disable the HTTP function and default mode is enable.

Button



: press this button to take effect.

4.8.2 Port-MAC-IP Binding

The Port-MAC-IP Binding configuration provides the IPv4/IPv6 for basic security protection and filtering by checking the source IP address of the packet. Each port can be configured on the page to check whether the source IP address and the source port match. The matching packets are further acted by the two filtering modes selected.

The Port-MAC-IP Binding configuration includes the Port-MAC-IP Port Setting, Port-MAC-IP Entry Setting and DHCP Snooping Entry Setting. Table 4-8-2 shows the items of Port-MAC-IP Binding functions.

Security Configuration	
Item	Description
Port-MAC-IP Port Setting	Configure and display Port-MAC-IP Port settings on this web page.
Port-MAC-IP Entry Setting	Configure and display Port-MAC-IP Entry settings on this web page.
DHCP Snooping Entry Setting	Configure and display DHCP Snooping Entry settings on this web page.

Table 4-8-2: Descriptions of Port-MAC-IP Binding Configuration

4.8.2.1 Port-MAC-IP Port Setting

This page allows you to configure the Port-MAC-IP Port settings for Web Smart Switch as the screen in [Figure 4-8-3](#) appears.

Port-MAC-IP Port Setting

IMP Ports Configure

Port Selection

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Status

Disable ▾

All

Clear

Max. Learning Entry

1 ▾

Recovery Learning Entry

Disable ▾

Apply

Port Status

Port	State	Max. Learning Entry	Recovery Learning Entry
01	Disabled	3	Disabled
02	Disabled	3	Disabled
03	Disabled	3	Disabled
04	Disabled	3	Disabled
05	Disabled	3	Disabled
06	Disabled	3	Disabled
07	Disabled	3	Disabled
08	Disabled	3	Disabled

Figure 4-8-3: Port-MAC-IP Port Setting Configuration Screen Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	Select specific port for Port-MAC-IP Port settings.
• Status	Configure enable or disable the Port-MAC-IP Port setting and default mode is disable.
• Max. Learning Entry	Configure maximum number of dynamic binding groups for each port, the available range is 1 to 3 .
• Recovery Learning Entry	Configure enable or disable the automatically overrides the earliest bound group when the number of dynamically bound groups reaches the upper limit. The default mode is disable.
Port Status	
• Port	Display per port list.
• State	Display per port current operation mode.
• Max. Learning Entry	Display per port maximum number of Max. Learning Entry function.
• Recovery Learning Entry	Display per port current operation mode of Recovery Learning Entry function.

Buttons

All : press this button to select all ports.

Clear : press this button to clear all ports selection.

Apply : press this button to take effect.

4.8.2.2 Port-MAC-IP Entry Setting

This page allows you to configure the Port-MAC-IP Entry settings for Web Smart Switch as the screen in [Figure 4-8-4](#) appears.

Figure 4-8-4: Port-MAC-IP Entry Setting Configuration Screen Page Screenshot

The page includes the following fields:

Object	Description
Create IMP Entry	
• IPv4/IPv6	This column allows user to establish the IMP Entry as IPv4 or IPv6, and enter IPv4 or IPv6 IP Address in the right space.
IMP Entry Management	
• IP	This column provides corresponding to the selected IMP Entry IP Address.
• Check Port	This column provides configuring enable or disable the check source port compliance.
• Port	This column provides selecting the port for this IP address.
• Check MAC	This column provides configuring enable or disable the check source MAC compliance.
• MAC	This column provides configuring the corresponding source MAC for this IP address.
• Action	This column provides configuring the corresponding action filter / priority when the condition is met.
• Priority	This column provides configuring the queue for this IMP Entry when the action is selected as priority; the available range is 0 to 7 .
IP Table Monitor	
• IP	Display the IPv4 or IPv6 address.
• Type	Display the type information.

• Port	Display the port information.
• MAC	Display the MAC information.
• Action	Display the Action status.
• Priority	Display the priority status.
• Action	Edit : press this button to edit specific Port-MAC-IP Entry setting. Delete : press this button to delete Port-MAC-IP Entry setting.

Button

Apply

: press this button to take effect.

4.8.2.3 DHCP Snooping Entry Setting

This page allows you to configure the DHCP Snooping Entry settings for Web Smart Switch as the screen in [Figure 4-8-5](#) appears.

DHCP Snooping Entry Setting

DHCP Snooping Configure

DHCP Snooping: ▾

ARP Inspection: ▾

MAC Verification: ▾

Snooping Table

Port	IP	MAC	Leave Time	Action
------	----	-----	------------	--------

Figure 4-8-5: DHCP Snooping Entry Setting Configuration Screen Page Screenshot

The page includes the following fields:

Object	Description
DHCP Snooping Configure	
• DHCP Snooping	This column provides configuring enable or disable the DHCP snooping function. The DHCP Snooping is used to block intruder on the untrusted ports of DUT when it tries to intervene by injecting a bogus DHCP reply packet to a legitimate conversation between the DHCP client and server.
• ARP Inspection	This column provides configuring enable or disable the ARP inspection function. The ARP Inspection is a secure feature. Several types of attacks can be launched against a host or devices connected to Layer 2 networks by "poisoning" the ARP caches. This feature is used to block such attacks. Only valid ARP requests and responses can go through DUT.
• MAC Verification	This column provides configuring enable or disable the MAC verification function.
Snooping Table	
• Port	Display the port information.
• IP	Display the IPv4 or IPv6 address.
• MAC	Display the MAC information.
• Leave Time	Display the leave time information.
• Action	Edit : press this button to edit specific DHCP Snooping Entry setting. Delete : press this button to delete DHCP Snooping Entry setting.

Button

: press this button to take effect.

4.8.3 MAC Address Binding

The MAC Address Binding configuration provides MAC address-based security function. When this function is enabled, the port will discard packet which does not conform to the MAC table or discard a specific MAC address, mirror forwarding and sampling to the CPU port and other activities.

Only when the port learning function is disabled, can the MAC address in the non-MAC table be effectively prevented from entering the device by the port it binds. Without the broadcast port learning function, only the MAC address existing in the MAC table can be limited to enter the device by its bound port. The MAC address in the non-MAC table cannot be assigned to any port.

The MAC Address Binding Configuration screen in [Figure 4-8-6](#) is shown below.

MAC Address Binding

MAC Table Binding

Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Binding Enable ☐

Aging Time Range:1~1,800,000. (Unit: second)

Create MAC Entry

MAC Address Port

MAC Entry Management

MAC Drop ☐

Port Sniffer ☐

Priority Sflow ☐

MAC Table Monitor

Entry number: 0


MAC	State	Port	Drop	Sniffer	Sflow	Priority	Action
			☐	☐	☐		Edit Delete


Figure 4-8-6: MAC Address Binding Configuration Screen Page Screenshot


The page includes the following fields:

Object	Description
MAC Table Binding	
• Port Selection	Select specific port for MAC Address Binding settings.
• Binding Enable	Click to enable the MAC Binding function.
• Aging Time	This column provides configuring the Aging time for MAC address table refresh; the default aging time is 300 seconds and available range is 1 to 1800000 seconds.
MAC Entry Creation	
• MAC	This column provides configuring the MAC address for specific port.
• Port	This column provides selecting the port for this MAC address.
MAC Entry Management	
• MAC	Display the MAC information.
• Port	Select specific port for MAC Address Binding settings.
• Priority	Select specific priority for MAC Address Binding settings; the default is Disable and available options are from 0 to 7 .
• Drop	Click to enable the Drop function.
• Sniffer	Click to enable the Sniffer function.
• Sflow	Click to enable the Sflow function.
MAC Table Monitor	
• Entry Number	Display the MAC Address Binding entry number information.
• MAC	Display the MAC information.
State	Display the MAC Address state information.
Port	Display the Port information.
Drop	Display the Drop status information.
Sniffer	Display the Sniffer status information.
Sflow	Display the Sflow status information.
Priority	Display the Priority status information.
• Action	Edit : press this button to edit specific MAC Address Binding setting. Delete : press this button to delete MAC Address Binding setting.

Buttons

 : press this button to select all ports.

 : press this button to clear all ports selection.

 : press this button to re-dynamic.

 : press this button to take effect.

4.9 Advanced Features

On the Access Advanced Features configuration web page, you can view and configure Advanced Features functions of the Web Smart Switch as the screen in [Figure 4-9-1](#) appears.

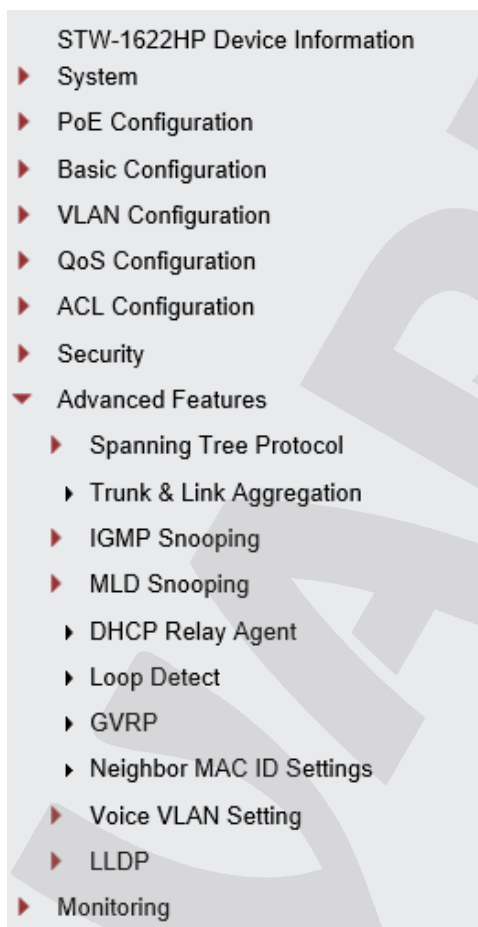


Figure 4-9-1: Web Smart Switch Advanced Features Configuration Web Page

Advanced Features Configuration	
Item	Description
Spanning Tree Protocol	Configure and display Spanning Tree Protocol configuration settings on this web page.
Trunk & Link Aggregation	Configure and display Trunk & Link Aggregation configuration settings on this web page.
IGMP Snooping	Configure and display IGMP Snooping configuration settings on this web page.
MLD Snooping	Configure and display MLD Snooping configuration settings on this web page.
DHCP Relay Agent	Configure and display DHCP Relay Agent configuration settings on this web page.
Loop Detect	Configure and display Loop Detect configuration settings on this web page.
GVRP	Configure and display GVRP configuration settings on this web page.
Neighbor MAC ID Settings	Configure and display Neighbor MAC ID settings on this web page.
Voice VLAN Settings	Configure and display Voice VLAN settings on this web page.
LLDP	Configure and display LLDP configuration settings on this web page.

Table 4-9-1: Descriptions of Advanced Features Configuration

4.9.1 Spanning Tree Protocol

Theory

The Spanning Tree protocol can be used to detect and disable network loops, and to provide backup links between switches, bridges or routers. This allows the switch to interact with other bridging devices in your network to ensure that only one route exists between any two stations on the network, and provide backup links which automatically take over when a primary link goes down. The spanning tree algorithms supported by this switch include these versions:

- **STP – Spanning Tree Protocol (IEEE 802.1D)**
- **RSTP – Rapid Spanning Tree Protocol (IEEE 802.1w)**
- **MSTP – Multiple Spanning Tree Protocol (IEEE 802.1s)**

The **IEEE 802.1D Spanning Tree** Protocol and **IEEE 802.1w Rapid Spanning Tree** Protocol allow for the blocking of links between switches that form loops within the network. When multiple links between switches are detected, a primary link is established. Duplicated links are blocked from use and become standby links. The protocol allows for the duplicate links to be used in the event of a failure of the primary link. Once the Spanning Tree Protocol is configured and enabled, primary links are established and duplicated links are blocked automatically. The reactivation of the blocked links (at the time of a primary link failure) is also accomplished automatically without operator intervention.

This automatic network reconfiguration provides maximum uptime to network users. However, the concepts of the Spanning Tree Algorithm and protocol are a complicated and complex subject and must be fully researched and understood. It is possible to cause serious degradation of the performance of the network if the Spanning Tree is incorrectly configured. Please read the following before making any changes from the default values.

The Switch STP performs the following functions:

- Creates a single spanning tree from any combination of switching or bridging elements.
- Creates multiple spanning trees – from any combination of ports contained within a single switch, in user specified groups.
- Automatically reconfigures the spanning tree to compensate for the failure, addition, or removal of any element in the tree.
- Reconfigures the spanning tree without operator intervention.

Bridge Protocol Data Units

For STP to arrive at a stable network topology, the following information is used:

- The unique switch identifier
- The path cost to the root associated with each switch port
- The port identifier

STP communicates between switches on the network using Bridge Protocol Data Units (BPDUs). Each BPDU contains the following information:

- The unique identifier of the switch that the transmitting switch currently believes is the root switch
- The path cost to the root from the transmitting port
- The port identifier of the transmitting port

The switch sends BPDUs to communicate and construct the spanning-tree topology. All switches connected to the LAN on which the packet is transmitted will receive the BPDU. BPDUs are not directly forwarded by the switch, but the receiving switch uses the information in the frame to calculate a BPDU, and, if the topology changes, initiates a BPDU transmission.

The communication between switches via BPDUs results in the following:

- One switch is elected as the root switch
- The shortest distance to the root switch is calculated for each switch
- A designated switch is selected. This is the switch closest to the root switch through which packets will be forwarded to the root.
- A port for each switch is selected. This is the port providing the best path from the switch to the root switch.
- Ports included in the STP are selected.

Creating a Stable STP Topology

It is to make the root port a fastest link. If all switches have STP enabled with default settings, the switch with the lowest MAC address in the network will become the root switch. By increasing the priority (lowering the priority number) of the best switch, STP can be forced to select the best switch as the root switch.

When STP is enabled using the default parameters, the path between source and destination stations in a switched network might not be ideal. For instance, connecting higher-speed links to a port that has a higher number than the current root port can cause a root-port change.

STP Port States

The BPDUs take some time to pass through a network. This propagation delay can result in topology changes where a port that transitioned directly from a Blocking state to a Forwarding state could create temporary data loops. Ports must wait for new network topology information to propagate throughout the network before starting to forward packets. They must also wait for the packet lifetime to expire for BPDU packets that were forwarded based on the old topology. The forward delay timer is used to allow the network topology to stabilize after a topology change. In addition, STP specifies a series of states a port must transition through to further ensure that a stable network topology is created after a topology change.

Each port on a switch using STP exists in one of the following five states:

- **Blocking** – the port is blocked from forwarding or receiving packets
- **Listening** – the port is waiting to receive BPDU packets that may tell the port to go back to the blocking state
- **Learning** – the port is adding addresses to its forwarding database, but not yet forwarding packets
- **Forwarding** – the port is forwarding packets
- **Disabled** – the port only responds to network management messages and must return to the blocking state first

Port transitions from one state to another are as follows:

- From initialization (switch boot) to blocking
- From blocking to listening or to disable
- From listening to learning or to disable
- From learning to forwarding or to disable
- From forwarding to disable
- From disable to blocking

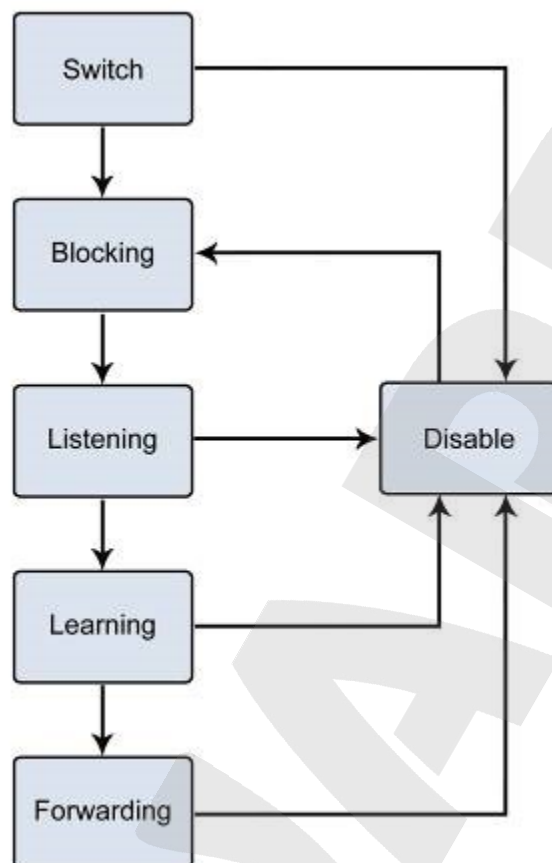


Figure 4-9-2: STP Port State Transitions

You can modify each port state by using management software. When you enable STP, every port on every switch in the network goes through the blocking state and then transitions through the states of listening and learning at power up. If properly configured, each port stabilizes to the forwarding or blocking state. No packets (except BPDUs) are forwarded from, or received by, STP enabled ports until the forwarding state is enabled for that port.

2. STP Parameters

STP Operation Levels

The Switch allows for two levels of operation: the switch level and the port level. The switch level forms a spanning tree consisting of links between one or more switches. The port level constructs a spanning tree consisting of groups of one or more ports. The STP operates in much the same way for both levels.



On the switch level, STP calculates the Bridge Identifier for each switch and then sets the Root Bridge and the Designated Bridges.

On the port level, STP sets the Root Port and the Designated Ports.

The following are the user-configurable STP parameters for the switch level:

Parameter	Description	Default Value
Bridge Identifier (Not user configurable except by setting priority below)	A combination of the User-set priority and the switch's MAC address. The Bridge Identifier consists of two parts: a 16-bit priority and a 48-bit Ethernet MAC address 32768 + MAC	32768 + MAC
Priority	A relative priority for each switch – lower numbers give a higher priority and a greater chance of a given switch being elected as the root bridge	32768
Hello Time	The length of time between broadcasts of the hello message by the switch	2 seconds
Maximum Age Timer	Measures the age of a received BPDU for a port and ensures that the BPDU is discarded when its age exceeds the value of the maximum age timer.	20 seconds
Forward Delay Timer	The amount time spent by a port in the learning and listening states waiting for a BPDU that may return the port to the blocking state.	15 seconds

The following are the user-configurable STP parameters for the port or port group level:

Variable	Description	Default Value
Port Priority	A relative priority for each port – lower numbers give a higher priority and a greater chance of a given port being elected as the root port	128
Port Cost	A value used by STP to evaluate paths – STP calculates path costs and selects the path with the minimum cost as the active	200,000-100Mbps Fast Ethernet ports 20,000-1000Mbps Gigabit Ethernet ports

	path	0 - Auto
--	------	----------

Default Spanning-Tree Configuration

Feature	Default Value
Enable state	STP disabled for all ports
Port priority	128
Port cost	0
Bridge Priority	32,768

User-Changeable STA Parameters

The Switch's factory default setting should cover the majority of installations. However, it is advisable to keep the default settings as set at the factory; unless, it is absolutely necessary. The user changeable parameters in the Switch are as follows:

Priority – A Priority for the switch can be set from 0 to 65535. 0 is equal to the highest Priority.

Hello Time – The Hello Time can be from 1 to 10 seconds. This is the interval between two transmissions of BPDU packets sent by the Root Bridge to tell all other Switches that it is indeed the Root Bridge. If you set a Hello Time for your Switch, and it is not the Root Bridge, the set Hello Time will be used if and when your Switch becomes the Root Bridge.



The Hello Time cannot be longer than the Max. Age; otherwise, a configuration error will occur.

Max. Age – The Max Age can be from 6 to 40 seconds. At the end of the Max Age, if a BPDU has still not been received from the Root Bridge, your Switch will start sending its own BPDU to all other Switches for permission to become the Root Bridge. If it turns out that your Switch has the lowest Bridge Identifier, it will become the Root Bridge.

Forward Delay Timer – The Forward Delay can be from 4 to 30 seconds. This is the time any port on the Switch spends in the listening state while moving from the blocking state to the forwarding state.



Observe the following formulas when setting the above parameters:

Max. Age _ 2 x (Forward Delay - 1 second)

Max. Age _ 2 x (Hello Time + 1 second)

Port Priority – A Port Priority can be from 0 to 240. The lower the number, the greater the probability the port will be chosen as the Root Port.

Port Cost – A Port Cost can be set from 0 to 200000000. The lower the number, the greater the probability the port will be chosen to forward packets.

3. Illustration of STP

A simple illustration of three switches connected in a loop is depicted in the below diagram. In this example, you can anticipate some major network problems if the STP assistance is not applied.

If switch A broadcasts a packet to switch B, switch B will broadcast it to switch C, and switch C will broadcast it to back to switch A and so on. The broadcast packet will be passed indefinitely in a loop, potentially causing a network failure. In this example, STP breaks the loop by blocking the connection between switch B and C. The decision to block a particular connection is based on the STP calculation of the most current Bridge and Port settings.

Now, if switch A broadcasts a packet to switch C, then switch C will drop the packet at port 2 and the broadcast will end there. Setting-up STP using values other than the defaults, can be complex. Therefore, you are advised to keep the default factory settings and STP will automatically assign root bridges/ports and block loop connections. Influencing STP to choose a particular switch as the root bridge using the Priority setting, or influencing STP to choose a particular port to block using the Port Priority and Port Cost settings is, however, relatively straight forward.

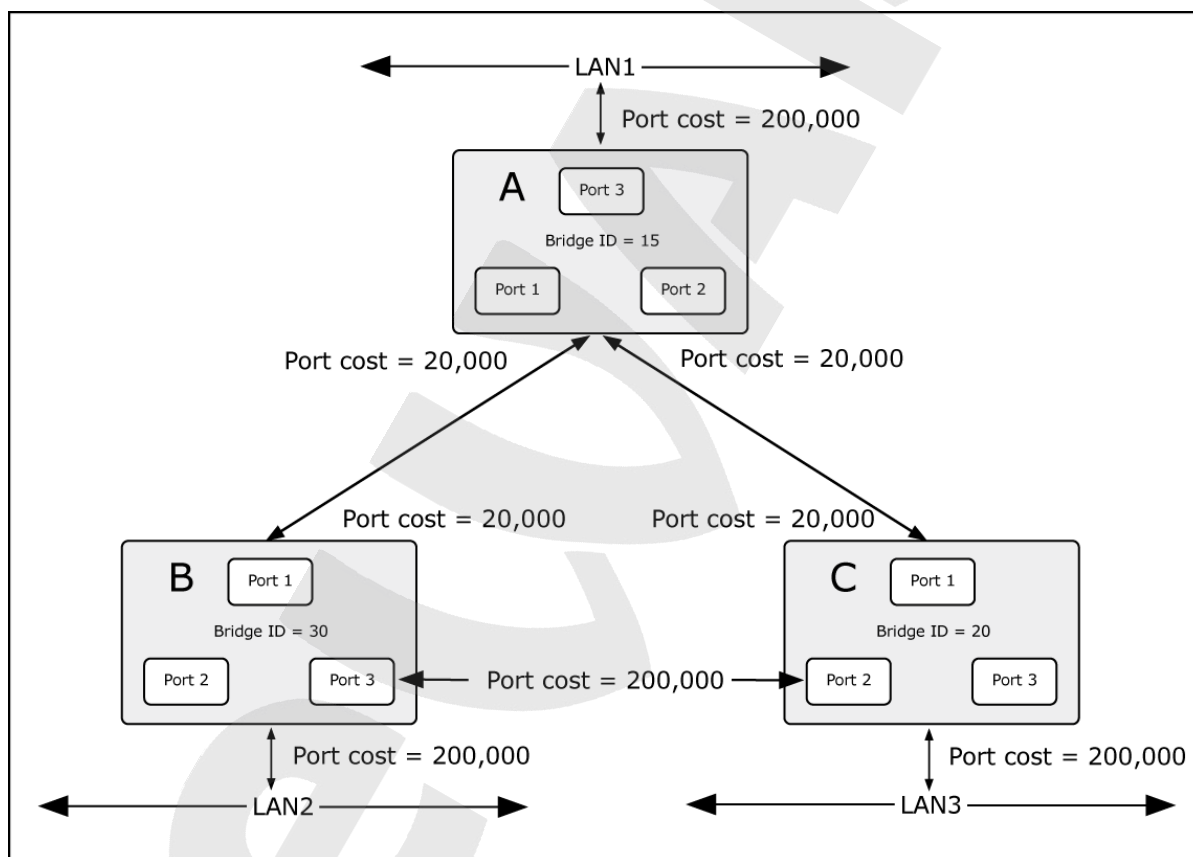


Figure 4-9-3: Before Applying the STA Rules

In this example, only the default STP values are used.

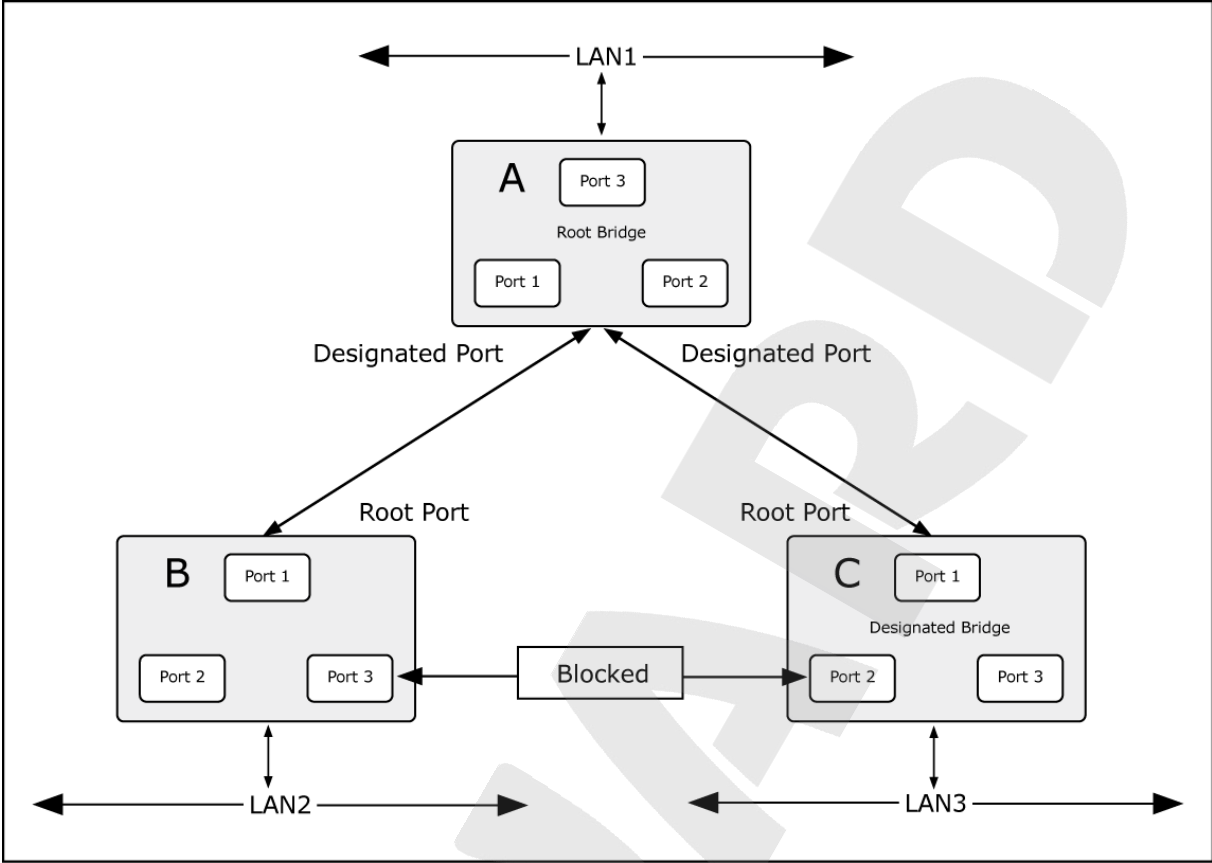


Figure 4-9-4: After Applying the STA Rules

The switch with the lowest Bridge ID (switch C) was elected the root bridge, and the ports were selected to give a high port cost between switches B and C. The two (optional) Gigabit ports (default port cost = 20,000) on switch A are connected to one (optional) Gigabit port on both switch B and C. The redundant link between switch B and C is deliberately chosen as a 100 Mbps Fast Ethernet link (default port cost = 200,000). Gigabit ports could be used, but the port cost should be increased from the default to ensure that the link between switch B and switch C is the blocked link.

The Spanning Tree Protocol configuration includes the Port-MAC-IP Port Setting, Port-MAC-IP Entry Setting and DHCP Snooping Entry Setting and table 4-9-2 show the items of Port-MAC-IP Binding functions.

Spanning Tree Protocol Configuration	
Item	Description
STP Global Settings	Configure and display STP Global settings on this web page.
STP Port Settings	Configure and display STP Port settings on this web page.
MST Configuration Identification	Configure and display MST Configuration Identification settings on this web page.
STP Instance Settings	Configure and display STP Instance settings on this web page.
MSTP Port Information	Configure and display MSTP Port Information on this web page.
STP Loop Detect Settings	Configure and display STP Loop Detect settings on this web page.

Table 4-9-2: Descriptions of Spanning Tree Protocol Configuration

4.9.1.1 STP Global Settings

This page allows you to configure the STP Global settings for Web Smart Switch as the screen in [Figure 4-9-5](#) appears.

STP Global Settings

STP State:

STP Version:

Bridge Max Age (6-40): sec

Bridge Hello Time (1-10): sec

Bridge Forward Delay (4-30): sec

Max Hops (6-40): sec

TC Counts (5-30):

STP BPDU Filter:

Note:

$2 \times (\text{Bridge_Forward_Delay} - 1.0 \text{ seconds}) \geq \text{Bridge_Max_Age}$


$\text{Bridge_Max_Age} \geq 2 \times (\text{Bridge_Hello_Time} + 1.0 \text{ seconds})$

Figure 4-9-5: STP Global Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• STP State	This column provides configuring enable or disable the spanning tree function.
• STP Version	This column provides selecting the spanning tree operation version; the default version is MSTP and available options are STP , RSTP and MSTP .
• Bridge Max Age (6-40)	This column provides configuring the value for Bridge Max Age; the default value is 20 seconds and the available range is 6 to 40 seconds.
• Bridge Hello Time (1-10)	This column provides configuring the value for Bridge Hello Time; the default value is 2 seconds and the available range is 1 to 10 seconds.
• Bridge Forward Delay (4-30)	This column provides configuring the value for Bridge Forward Delay; the default value is 15 seconds and the available range is 4 to 30 seconds.
• Max Hops (6-40)	This column provides configuring the value for Max Hops; the default value is 20 seconds and the available range is 6 to 40 seconds.
• TC Counters (5-30)	This column provides configuring the value for TC Counters; the default value is 5 and the available range is 5 to 30.
• STP BPDU Filter	This column provides configuring enable or disable the spanning BPDU Filter function.

Button



: press this button to take effect.

4.9.1.2 STP Port Settings

This page allows you to configure the STP Port settings for Web Smart Switch as the screen in [Figure 4-9-6](#) appears.

STP Port Settings

Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐


State: Edge Port: BPDU Protect: Root Protect: Loop Protect:

Port	State	Edge Port	BPDU Protect	Root Protect	Loop Protect
01	Disabled	Disabled	Disabled	Disabled	Disabled
02	Disabled	Disabled	Disabled	Disabled	Disabled
03	Disabled	Disabled	Disabled	Disabled	Disabled
04	Disabled	Disabled	Disabled	Disabled	Disabled
05	Disabled	Disabled	Disabled	Disabled	Disabled
06	Disabled	Disabled	Disabled	Disabled	Disabled
07	Disabled	Disabled	Disabled	Disabled	Disabled
08	Disabled	Disabled	Disabled	Disabled	Disabled
09	Disabled	Disabled	Disabled	Disabled	Disabled
10	Disabled	Disabled	Disabled	Disabled	Disabled


Figure 4-9-6: STP Port Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	Select specific port for further configuration.
• State	This column provides configuring enable or disable the spanning tree function on specific port; the default mode is Disable. Also display current status of per port.
• Edge Port	This column provides configuring enable or disable the Edge Port function on specific port; the default mode is Disable. Also display current status of per port.
• BPDU Protect	This column provides configuring enable or disable the BPDU Protect function on specific port; the default mode is Disable. Also display current status of per port.
• Root Protect	This column provides configuring enable or disable the Root Protect function on specific port; the default mode is Disable. Also display current status of per port.
• Loop Protect	This column provides configuring enable or disable the Loop Protect function on specific port; the default mode is Disable. Also display current status of per port.
• Port	Display per port list.

ButtonsA rectangular button with a light gray border and the word "Apply" in blue text.

: press this button to take effect.

A rectangular button with a light gray border and the word "Refresh" in blue text.

: press this button to refresh current status.

4.9.1.3 MST Configuration Identification

This page allows you to configure the MST Configuration Identification settings for Web Smart Switch as the screen in [Figure 4-9-7](#) appears.

MST Configuration Identification

MST Configuration Identification Settings

Configuration Name

STW-1622HP

Revision Level(0-65535)

0

Apply

Instance ID Settings

MSTI ID (1-4094)

Action

Add VID

VID List (1-4094)

Apply

MSTI ID	VID List	Action
CIST	1-4094	Edit Delete

Figure 4-9-7: MST Configuration Identification Configuration Page Screenshot

The page includes the following fields:

Object	Description
MST Configuration Identification Settings	
• Configuration Name	This column provides configuring the configuration name and the available characters is 32.
• Revision Level	This column provides configuring the Revision Level settings and the available range is 0 to 65535.
Instance ID Settings	
• MSTI ID (1-4094)	This column provides configuring the MSTI ID settings and the available range is 1 to 4094.
• Action	This column provides selecting the Action of MSTI; the default version is Add VID and available options are Add VID and Remove VID.
• VID List (1-4094)	This column provides configuring the VID List settings f MSTI; the available VID range is 1 to 4094.
• MTSI ID	Display MSTI ID information.
• VID List	Display VID List information.
• Action	Edit : press this button to edit specific Instance ID Settings. Delete : press this button to delete specific Instance ID Settings.

Button

Apply

: press this button to take effect.

4.9.1.4 STP Instance Settings

This page allows you to configure the STP Instance settings for Web Smart Switch as the screen in [Figure 4-9-8](#) appears.

STP Instance Settings

MSTI ID Priority (0-61440) Apply

Instance Type	Instance Priority	Action	
CIST	32768	Edit	View

STP Instance Operational Status

MSTP ID	--	Designated Root Bridge	--
External Root Cost	--	Regional Root Bridge	--
Internal Root Cost	--	Designated Bridge	--
Root Port	--	Max. Age	--
Forward Delay	--	Max. Hops	--

Figure 4-9-8: STP Instance Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• MSTI ID	This column provides configuring the MSTI ID settings.
• Priority	This column provides configuring the Priority settings and the available range is 0 to 61440 .
• Instance Type	Display the instance type information.
• Instance Priority	Display the instance priority information.
• Action	Edit : press this button to edit specific Instance ID Settings. View : press this button to view STP Instance operational status.
STP Instance Operational Status	
• MSTP ID	Display MSTP ID information.
• External Root Cost	Display External Root Cost information.
• Internal Root Cost	Display Internal Root Cost information.
• Root Port	Display Root Port information.
• Forward Delay	Display Forward Delay information.
• Designated Root Bridge	Display Designated Root Bridge information.
• Regional Root Bridge	Display Regional Root Bridge information.
• Designated Bridge	Display Designated Bridge information.
• Max. Age	Display Max. Age information.
• Max. Hops	Display Max. Hops information.

Button

Apply : press this button to take effect.

4.9.1.5 MSTP Port Information


This page allows you to configure the MSTP Port Information settings for Web Smart Switch as the screen in [Figure 4-9-9](#) appears.

Figure 4-9-9: MSTP Port Information Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port	Select specific port for further configuration.
MSTP Port Settings	
• Instance ID	This column provides configuring the Instance ID settings.
• Internal Path Cost (0-200000000,0=Auto)	This column provides configuring the Internal Path Cost settings; the available range is 0 to 200000000 , 0=Auto .
• Priority (0-240)	This column provides configuring the Priority settings; the available VID range is 0 to 240 .
• MSTI	Display MSTI information.
• Designated Bridge	Display Designated Bridge information.
• Internal Path Cost	Display Internal Path Cost information.
• Priority	Display Priority information.
• Status	Display Status information.
• Role	Display Role information.
• Action	 : press this button to edit specific MSTP Port Settings.

Buttons

 : press this button to find MSTP Port information.

 : press this button to take effect.

4.9.1.6 STP Loop Detect Settings

This page allows you to configure the STP Loop Detect settings for Web Smart Switch as the screen in [Figure 4-9-10](#) appears.

STP Loop Detect Settings

STP Loop Detect Setting

STP Loop Detection State:

Block Release Time: sec

Loop Detect Port State


Port	State
1	---
2	---
3	---
4	---
5	---
6	---
7	---
8	---

Figure 4-9-10: STP Loop Detect Settings Configuration Page Screenshot


The page includes the following fields:

Object	Description
STP Loop Detect Setting	
• SFP Loop Detection State	This column provides configuring enable or disable the SFP Loop Detection State function on specific port; the default mode is Enable.
• Block Release Time	This column provides configuring the Block Release Time settings; the available range is 1 to 255 .
Loop Detect Port State	
• Port	Display per port list.
• State	Display per port state information.

Buttons



: press this button to take effect.



: press this button to refresh current status.

4.9.2 Trunk & Link Aggregation

Theory

Port Aggregation optimizes port usage by linking a group of ports together to form a single Link Aggregated Groups (LAGs).

Port Aggregation multiplies the bandwidth between the devices, increases port flexibility, and provides link redundancy.

Each LAG is composed of ports of the same speed, set to full-duplex operations. Ports in a LAG, can be of different media types (UTP/Fiber, or different fiber types), provided they operate at the same speed.

Aggregated Links can be assigned manually (**Port Trunk**) or automatically by enabling Link Aggregation Control Protocol (**LACP**) on the relevant links.

Aggregated Links are treated by the system as a single logical port. Specifically, the Aggregated Link has similar port attributes to a non-aggregated port, including auto-negotiation, speed, Duplex setting, etc.

The device supports the following Aggregation links :

- **Static LAGs (Port Trunk)** – Force aggregated selected ports to be a trunk group.
- **Link Aggregation Control Protocol (LACP)** LAGs - LACP LAG negotiate Aggregated Port links with other LACP ports located on a different device. If the other device ports are also LACP ports, the devices establish a LAG between them.

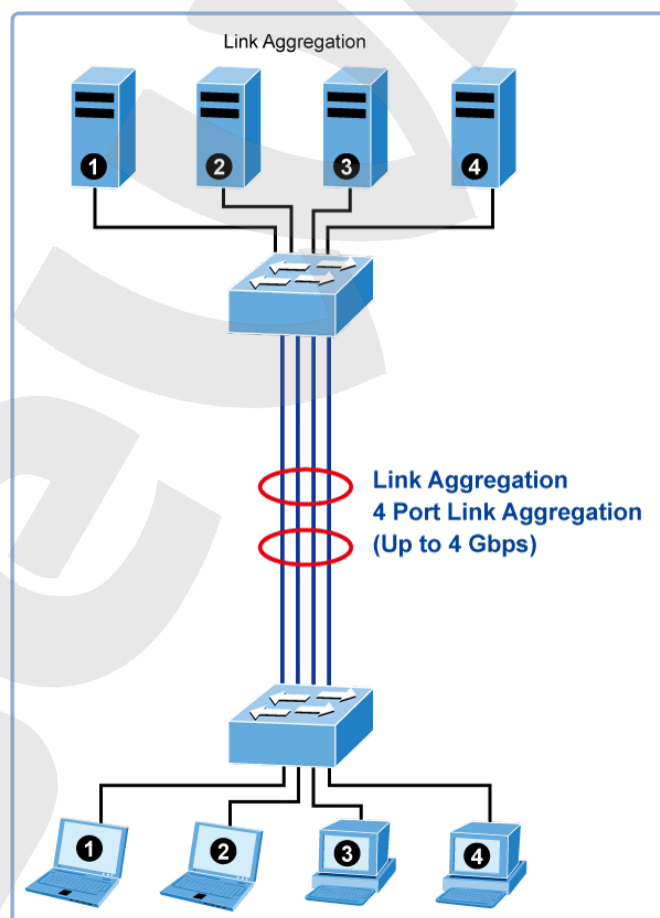


Figure 4-9-11: Link Aggregation

The **Link Aggregation Control Protocol (LACP)** provides a standardized means for exchanging information between Partner Systems that require high speed redundant links. Link aggregation lets you group up to eight consecutive ports into a single dedicated connection. This feature can expand bandwidth to a device on the network. LACP operation requires full-duplex mode, more detail information refer to the IEEE 802.3ad standard.

Port link aggregations can be used to increase the bandwidth of a network connection or to ensure fault recovery. Link aggregation lets you group up to 4 consecutive ports into a single dedicated connection between any two the Switch or other Layer 2 switches. However, before making any physical connections between devices, use the Link aggregation Configuration menu to specify the link aggregation on the devices at both ends. When using a port link aggregation, note that:

- The ports used in a link aggregation must all be of the same media type (RJ45, 100 Mbps fiber).
- The ports that can be assigned to the same link aggregation have certain other restrictions (see below).
- Ports can only be assigned to one link aggregation.
- The ports at both ends of a connection must be configured as link aggregation ports.
- None of the ports in a link aggregation can be configured as a mirror source port or a mirror target port.
- All of the ports in a link aggregation have to be treated as a whole when moved from/to, added or deleted from a VLAN.
- The Spanning Tree Protocol will treat all the ports in a link aggregation as a whole.
- Enable the link aggregation prior to connecting any cable between the switches to avoid creating a data loop.
- Disconnect all link aggregation port cables or disable the link aggregation ports before removing a port link aggregation to avoid creating a data loop.

Up to 10 ports can be aggregated at the same time. Web Smart Switch supports Gigabit Ethernet ports (up to 5 groups). If the group is defined as a LACP static link aggregation group, then any extra ports selected are placed in a standby mode for redundancy if one of the other ports fails. If the group is defined as a local static link aggregation group, then the number of ports must be the same as the group member ports.

The aggregation code ensures that frames belonging to the same frame flow (for example, a TCP connection) are always forwarded on the same link aggregation member port. Recording of frames within a flow is therefore not possible. The aggregation code is based on the following information:

- **Source MAC**
- **Destination MAC**
- **Source and destination IPv4 address.**
- **Source and destination TCP/UDP ports for IPv4 packets**

Normally, all 5 contributions to the aggregation code should be enabled to obtain the best traffic distribution among the link aggregation member ports. Each link aggregation may consist of up to 10 member ports. Any quantity of link aggregation s may be configured for the device (only limited by the quantity of ports on the device.) To configure a proper traffic distribution, the ports within a link aggregation must use the same link speed.

This page allows you to configure the Trunk & Link Aggregation settings for Web Smart Switch as the screen in Figure 4-9-12 appears.

Trunk & Link Aggregation

Link Aggregation Algorithm MAC Source ▼

Group	Group1	
Port Select	17	18
	☒	☒
Status		
State	Disable ▼	
Trunk Type	LACP ▼	
Mode	Passive ▼	
Time Out	Short ▼	


Apply

Figure 4-9-12: Trunk & Link Aggregation Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Link Aggregation Algorithm	This column provides configuring Link Aggregation Algorithm and default is MAC Source, the available options are shown below: Port MAC Source MAC Destination MAC Source Destination IP Source IP Destination TCP/UDP Destination Port TCP/UDP Source Port
• Group	Display Trunk & Link Aggregation group information.
• Port Select	This column provides configuring and selecting the port for Trunk & Link Aggregation.
• Status	Display Trunk & Link Aggregation member port status.
• State	This column provides configuring enable or disable the Trunk & Link Aggregation function on specific port; the default mode is Disable.
• Trunk Type	This column provides configuring and selecting the Trunk type for Trunk & Link Aggregation function; the default mode is LACP and available options are Static and LACP .
• Mode	This column provides configuring and selecting the Trunk mode for Trunk & Link Aggregation function; the default mode is Passive and available options are Active and Passive .
• Time Out	This column provides configuring and selecting the Time Out for Trunk & Link Aggregation function; the default mode is Short and available options are Short and Long .

Button



: press this button to take effect.

4.9.3 IGMP Snooping

Theory

The **Internet Group Management Protocol (IGMP)** lets host and routers share information about multicast groups memberships. IGMP snooping is a switch feature that monitors the exchange of IGMP messages and copies them to the CPU for feature processing. The overall purpose of IGMP Snooping is to limit the forwarding of multicast frames to only ports that are a member of the multicast group.

About the Internet Group Management Protocol (IGMP) Snooping

Computers and network devices that want to receive multicast transmissions need to inform nearby routers that they will become members of a multicast group. The **Internet Group Management Protocol (IGMP)** is used to communicate this information. IGMP is also used to periodically check the multicast group for members that are no longer active. In the case where there is more than one multicast router on a sub network, one router is elected as the 'queried'. This router then keeps track of the membership of the multicast groups that have active members. The information received from IGMP is then used to determine if multicast packets should be forwarded to a given sub network or not. The router can check, using IGMP, to see if there is at least one member of a multicast group on a given subnet work. If there are no members on a sub network, packets will not be forwarded to that sub network.

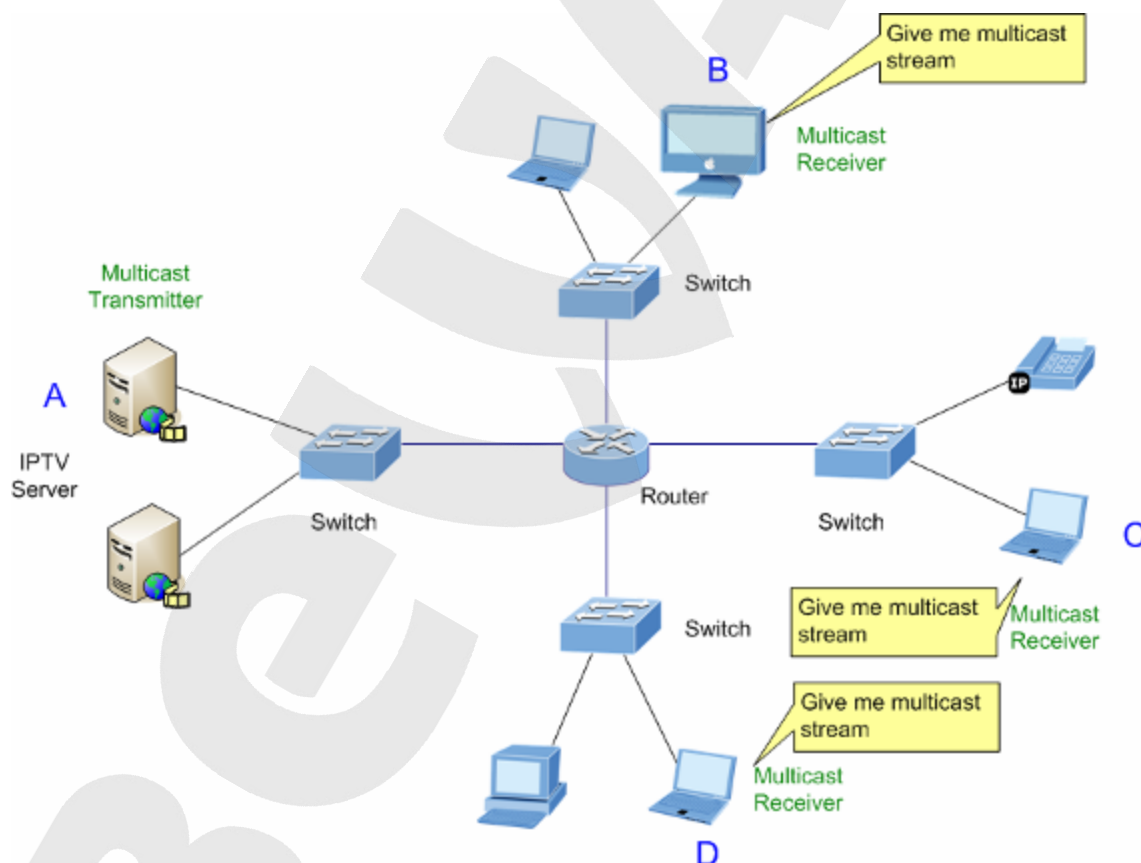


Figure 4-9-13: Multicast Service

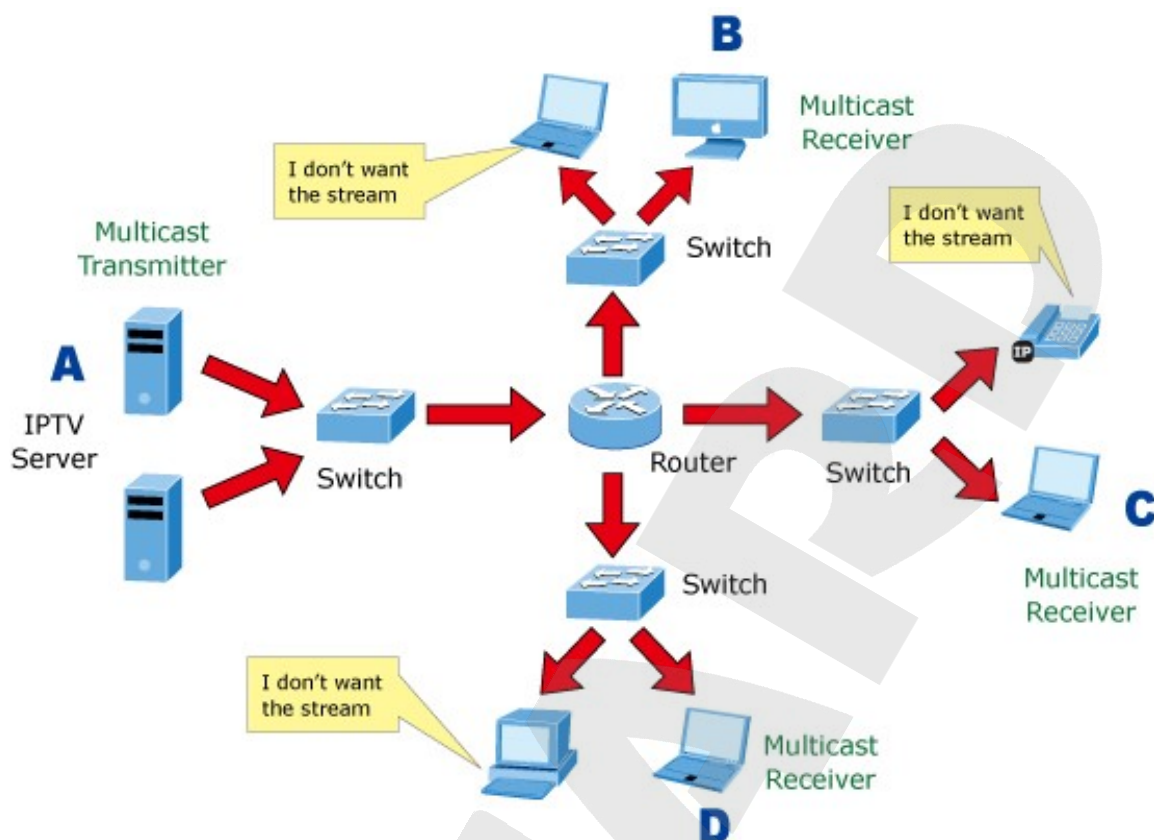


Figure 4-9-14: Multicast Flooding

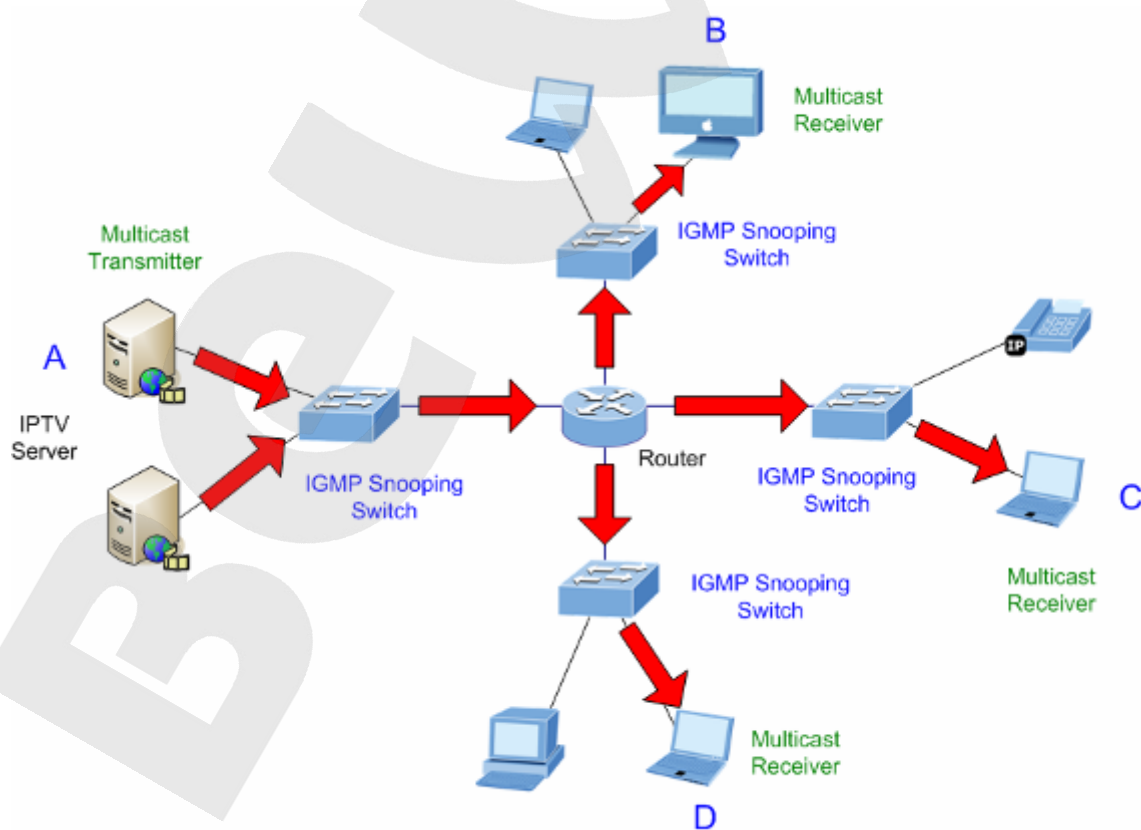


Figure 4-9-15: IGMP Snooping Multicast Stream Control

IGMP Versions 1 and 2

Multicast groups allow members to join or leave at any time. IGMP provides the method for members and multicast routers to communicate when joining or leaving a multicast group.

IGMP version 1 is defined in RFC 1112. It has a fixed packet size and no optional data.

The format of an IGMP packet is shown below:

IGMP Message Format

Octets

0	8	16	31
Type	Response Time	Checksum	
Group Address (all zeros if this is a query)			

The IGMP Type codes are shown below:

Type	Meaning
0x11	Membership Query (if Group Address is 0.0.0.0)
0x11	Specific Group Membership Query (if Group Address is Present)
0x16	Membership Report (version 2)
0x17	Leave a Group (version 2)
0x12	Membership Report (version 1)

IGMP packets enable multicast routers to keep track of the membership of multicast groups, on their respective sub networks.

The following outlines what is communicated between a multicast router and a multicast group member using IGMP.

A host sends an IGMP “**report**” to join a group

A host will never send a report when it wants to leave a group (for version 1).

A host will send a “**leave**” report when it wants to leave a group (for version 2).

Multicast routers send IGMP queries (to the all-hosts group address: 224.0.0.1) periodically to see whether any group members exist on their sub networks. If there is no response from a particular group, the router assumes that there are no group members on the network.

The Time-to-Live (TTL) field of query messages is set to 1 so that the queries will not be forwarded to other sub networks.

IGMP version 2 introduces some enhancements such as a method to elect a multicast queried for each LAN, an explicit leave

message, and query messages that are specific to a given group.

The states a computer will go through to join or to leave a multicast group are shown below:

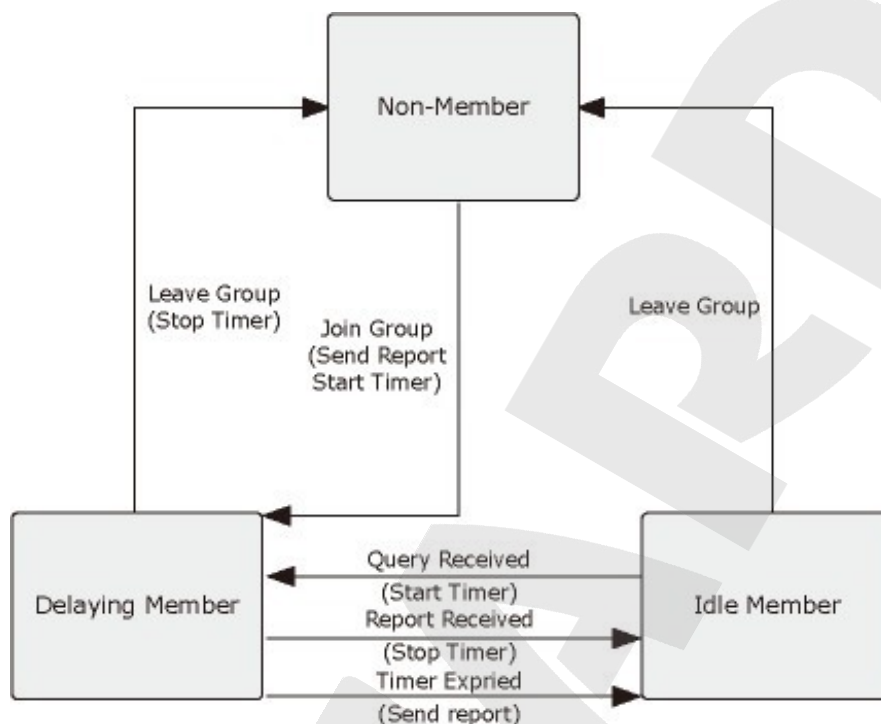


Figure 4-9-16: IGMP State Transitions

■ IGMP Querier –

A router, or multicast-enabled switch, can periodically ask their hosts if they want to receive multicast traffic. If there is more than one router/switch on the LAN performing IP multicasting, one of these devices is elected “**querier**” and assumes the role of querying the LAN for group members. It then propagates the service requests on to any upstream multicast switch/router to ensure that it will continue to receive the multicast service.



Multicast routers use this information, along with a multicast routing protocol such as DVMRP or PIM, to support IP multicasting across the Internet.

4.9.3.1 IGMP Snooping Settings

This page allows you to configure the IGMP Snooping settings for Web Smart Switch as the screen in [Figure 4-9-17](#) appears.

Figure 4-9-17: IGMP Snooping Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• IGMP Snooping State	This column provides configuring enable or disable the IGMP Snooping function.
• Version	This column provides selecting the IGMP Snooping operation version; the default version is IGMPv3 and available options are IGMPv1 , IGMPv2 and IGMPv3 .
• IGMP Group Aged Out	This column provides configuring enable or disable the IGMP Group Aged Out function.
• GMI (10-65535)	This column provides configuring the value for Group Member Interval Time; the default value is 100 seconds and the available range is 10 to 65535 seconds. After the dynamic Group is established, the time is used to ask if there is member.
• Router Aging Time (10-65535)	This column provides configuring the value for Router Aging Time; the default value is 100 seconds and the available range is 10 to 65535 seconds. The time the dynamic Router Port exists, and if the Query packet is not continuously received, the dynamic Router Port clears.
• IGMP Immediate Leave	This column provides configuring enable or disable the IGMP Immediate Leave function.

Button

: press this button to take effect.

4.9.3.2 IGMP Snooping Router Ports Settings

This page allows you to configure the IGMP Snooping Router Ports settings for Web Smart Switch as the screen in [Figure 4-9-18](#) appears.

IGMP Snooping Static Router Ports												
1	2	3	4	5	6	7	8	9	10	11	12	13
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
14	15	16	17	18	19	20	21	22	23	24	25	26
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Apply


IGMP Snooping Dynamic Router Ports												
1	2	3	4	5	6	7	8	9	10	11	12	13
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
14	15	16	17	18	19	20	21	22	23	24	25	26
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Figure 4-9-18: IGMP Snooping Router Ports Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
IGMP Snooping Static Router Ports	This column provides configuring the IGMP Snooping Static Router Ports.
IGMP Snooping Dynamic Router Ports	This column provides configuring them IGMP Snooping Dynamic Router Ports.

Button



: press this button to take effect.

4.9.3.3 IGMP Snooping Groups

This page allows you to configure the IGMP Snooping Groups settings for Web Smart Switch as the screen in [Figure 4-9-19](#) appears.

IGMP Snooping Static Group Configuration

Group Address Priority 0 ▼

Member Port

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

IGMP Snooping Group Information

Group	State	Member Port	Priority	Action
-------	-------	-------------	----------	--------

Figure 4-9-19: IGMP Snooping Groups Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
IGMP Snooping Static Group Configuration	
• Group Address	This column provides configuring the Group Address.
• Priority	This column provides configuring the value for Priority, the default value is 0 and the available range is 0 to 7 .
• Member Port	This column provides configuring to select specific ports for IGMP Snooping Groups settings.
IGMP Snooping Group Information	
• Group	Display per group list.
• State	Display per group status.
• Member Port	Display per group member port status.
• Priority	Display per group priority status.
• Action	Edit : press this button to edit specific IGMP Snooping Groups Settings. Delete : press this button to delete specific IGMP Snooping Groups Settings.

Button

: press this button to take effect.

4.9.3.4 IGMP Snooping Ports

This page allows you to configure the IGMP Snooping Groups settings for Web Smart Switch as the screen in [Figure 4-9-20](#) appears.

Group	State	Mode	Uptime	Expires	Source List
-------	-------	------	--------	---------	-------------

Figure 4-9-20: IGMP Snooping Groups Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
IGMP Snooping Port Information	
• Port	This column provides configuring to select specific ports for IGMP Snooping Ports settings.
• Group	Display per group list.
• State	Display per port status.
• Mode	Display per port status.
• Uptime	Display per port uptime status.
• Expires	Display per port expires status.
• Source List	Display per port source list status.

4.9.4 MLD Snooping

4.9.4.1 MLD Snooping Settings

This page allows you to configure the MLD Snooping settings for Web Smart Switch as the screen in [Figure 4-9-21](#) appears.

MLD Snooping Settings

MLD Snooping State

Disable ▾

Version

MLDv2 ▾

MLD Group Aged Out

Enable ▾

GMI (10-65535)

100

sec

Router Aging Time (10-65535)

100

sec

MLD Immediate Leave

Disable ▾

Apply

Figure 4-9-21: MLD Snooping Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• MLD Snooping State	This column provides configuring enable or disable the MLD Snooping function.
• Version	This column provides selecting the IGMP Snooping operation version; the default version is MLDv2 and available options are MLDv1 and MLDv2 .
• MLD Group Aged Out	This column provides configuring enable or disable the MLD Group Aged Out function.
• GMI (10-65535)	This column provides configuring the value for Group Member Interval Time; the default value is 100 seconds and the available range is 10 to 65535 seconds. After the dynamic Group is established, the time is used to ask if there is member.
• Router Aging Time (10-65535)	This column provides configuring the value for Router Aging Time; the default value is 100 seconds and the available range is 10 to 65535 seconds. The time the dynamic Router Port exists, and if the Query packet is not continuously received, the dynamic Router Port clears.
• MLD Immediate Leave	This column provides configuring enable or disable the MLD Immediate Leave function.

Button

Apply

: press this button to take effect.

4.9.4.2 MLD Snooping Router Ports Settings

This page allows you to configure the MLD Snooping Router Ports settings for Web Smart Switch as the screen in [Figure 4-9-22](#) appears.

MLD Snooping Router Ports Settings

MLD Snooping Static Router Ports																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐


MLD Snooping Dynamic Router Ports																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Figure 4-9-22: MLD Snooping Router Ports Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
MLD Snooping Static Router Ports	This column provides configuring the MLD Snooping Static Router Ports.
MLD Snooping Dynamic Router Ports	This column provides configuring them MLD Snooping Dynamic Router Ports.

Button



: press this button to take effect.

4.9.4.3 MLD Snooping Groups

This page allows you to configure the MLD Snooping Groups settings for Web Smart Switch; the screen in [Figure 4-9-23](#) appears.

MLD Snooping Static Group Configuration

Group Address Priority 0 ▼

Member Port

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Apply

MLD Snooping Group Information

Group	State	Member Port	Priority	Action
-------	-------	-------------	----------	--------

Figure 4-9-23: MLD Snooping Groups Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
MLD Snooping Static Group Configuration	
• Group Address	This column provides configuring the Group Address.
• Priority	This column provides configuring the value for Priority, the default value is 0 and the available range is 0 to 7 .
• Member Port	This column provides configuring to select specific ports for MLD Snooping Groups settings.
MLD Snooping Group Information	
• Group	Display per group list.
• State	Display per group status.
• Member Port	Display per group member port status.
• Priority	Display per group priority status.
• Action	Edit : press this button to edit specific MLD Snooping Groups Settings. Delete : press this button to delete specific MLD Snooping Groups Settings.

Button

Apply : press this button to take effect.

4.9.4.4 MLD Snooping Ports

This page allows you to configure the MLD Snooping Groups settings for Web Smart Switch as the screen in [Figure 4-9-24](#) appears.

MLD Snooping Ports					
MLD Snooping Port Information					
Port 1 ▼					
Group	State	Mode	Uptime	Expires	Source List

Figure 4-9-24: MLD Snooping Groups Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
MLD Snooping Port Information	
• Port	This column provides configuring to select specific ports for IGMP Snooping Ports settings.
• Group	Display per group list.
• State	Display per port status.
• Mode	Display per port status.
• Uptime	Display per port uptime status.
• Expires	Display per port expires status.
• Source List	Display per port source list status.

4.9.5 DHCP Relay Agent

Configure DHCP Relay on this page. **DHCP Relay** is used to forward and transfer DHCP messages between the clients and the server when they are not on the same subnet domain.

The **DHCP option 82** enables a DHCP relay agent to insert specific information into a DHCP request packets when forwarding client DHCP packets to a DHCP server and remove the specific information from a DHCP reply packets when forwarding server DHCP packets to a DHCP client. The DHCP server can use this information to implement IP address or other assignment policies. Specifically, the option works by setting two sub-options:

- **Circuit ID (option 1)**
- **Remote ID (option 2)**

The **Circuit ID** sub-option is supposed to include information specific to which circuit the request came in on.

The **Remote ID** sub-option was designed to carry information relating to the remote host end of the circuit.

The definition of Circuit ID in the switch is 4 bytes in length and the format is "vlan_id" "module_id" "port_no". The parameter of "vlan_id" is the first two bytes representing the VLAN ID. The parameter of "module_id" is the third byte for the module ID. The parameter of "port_no" is the fourth byte and it means the port number.

The Remote ID is 6 bytes in length, and the value equals the DHCP relay agent's MAC address. The DHCP Relay Agent Configuration screen in [Figure 4-9-25](#) appears.

DHCP Relay Agent

Global Setting

DHCP Relay Agent State ☐ Apply

DHCPv4 Setting

Hops Limit

DHCPv4 Server Setting		
Index	State	Address
1	☒	192.168.2.111
2	☐	
3	☐	
4	☐	
5	☐	

Apply

DHCPv6 Setting

DHCPv6 Server Setting		
Index	State	Address
1	☒	2001:1000::1
2	☐	
3	☐	
4	☐	
5	☐	


Apply

Figure 4-9-25: DHCP Relay Agent Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
Global Setting	
• DHCP Relay Agent State	Click to enable or disable the DHCP Relay Agent function.
DHCPv4 Setting	
• Hops Limit	This column provides configuring Hops Limit settings, limit the number of times DHCP packets can be forwarded and the available range is 1 to 16 .
• Index	Display per index list (1 to 5).
• State	Click to enable or disable the per index function.
• Address	This column provides configuring the DHCPv4 server IP address.
DHCPv6 Setting	
• Index	Display per index list (1 to 5).
• State	Click to enable or disable the per index function.
• Address	This column provides configuring the DHCPv6 server IP address.

Button

: press this button to take effect.

4.9.6 Loop Detect

Configure Loop Detect on this page. **Loop Detect** is used to detects the loop connection generated on Web Smart Switch, once detect the loop connection will block port to prevent loop connection affect Web Smart Switch operation performance. The Loop Detect Configuration screen in [Figure 4-9-26](#) appears.

Loop Detect

Loop Detect Setting

Loop Detection State

Disable

LDP Interval Time

3

unit:500ms

Block Release Time

9

unit:500ms

LDP MAC Destination Address

01:90:C3:00:00:00

Apply

Loop Detect Port Setting

Loop Detect Port Enabled

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Apply

Loop Detect Port State

Port	State
1	---
2	---
3	---
4	---
5	---
6	---
7	---
8	---

Refresh

Figure 4-9-26: Loop Detect Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
Loop Detect Setting	
• Loop Detection State	This column provides configuring enable or disable the Loop Detection State function.
• LDP Interval Time	This column provides configuring LDP Interval Time settings, the default value is 3 and the available range is 1 to 255. Unit is 500ms.
• Block Release Time	This column provides configuring Block Release Time settings, the default value is 9 and the available range is 1 to 255. Unit is 500ms.
• LDP MAC Destination Address	This column provides configuring LDP MAC Destination Address settings.
Loop Detect Port Setting	

• Loop Detect Port Enabled	This column provides configuring to select specific port for Loop Detect Port Enabled settings.
Loop Detect Port State	
• Port	Display per port list.
• State	Display per port Loop Detect Port State.

ButtonApply

: press this button to take effect.

4.9.7 GVRP


On this page, **GVRP** (GARP VLAN Registration Protocol or Generic VLAN Registration Protocol) is a protocol that facilitates control of virtual local area networks (VLANs) within a larger network. The GVRP Configuration screen in [Figure 4-9-27](#) appears.

Figure 4-9-27: GVRP Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• GVRP Settings	This column provides configuring enable or disable the GVRP function.
• Join Time	This column provides configuring Join Time settings; the default value is 2. The Join time must not be less than 2 seconds.
• Leave Time	This column provides configuring Leave Time settings; the default value is 6. The Leave time must not be less than 2 seconds.
• Leave All Time	This column provides configuring Leave All Time settings; the default value is 20. The Leave All time must not be less than Leave time.

Button



: press this button to take effect.

4.9.8 Neighbor MAC ID Settings

On this page, **Neighbor MAC ID Settings** is used for searching for switch MAC Address ID from each port of Web Smart Switch, according to send period setting for sending out the neighbor information packets. The Web Smart Switch will add or update the MAC Address ID when receiving the neighbor information packets; also, the switch neighbor MAC address ID information can be obtained by using the UDP NetCMD tools. The Neighbor MAC ID Settings Configuration screen in [Figure 4-9-28](#) is shown below.

Figure 4-9-28: Neighbor MAC ID Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Status	This column provides configuring enable or disable the Neighbor MAC ID settings function.
• Send Period	This column provides configuring Send Period settings; the default value is 3 and the available range is 1 to 65535 . Unit is second.
• Aging Time	This column provides configuring Aging Time settings; the default value is 6 and the available range is 1 to 65535 . Unit is second.
• Neighbor MAC ID Information	
• Port No.	Display the per port list.
• MAC Addr	Display the MAC address from per port list.
• Aging Time	Display the Aging time from per port list.

Buttons

Apply

: press this button to take effect.

Refresh

: press this button to refresh current status.

4.9.9 Voice VLAN Setting

On this page, **Voice VLAN Setting** is enabled for voice traffic forwarding on the Voice VLAN. The Web Smart Switch can classify and schedule network traffic. It is recommended that there be two VLANs on a port -- one for voice and one for data. Before connecting the IP device to the switch, the IP phone should configure the voice VLAN ID correctly. It should be configured through its own GUI. The Voice VLAN Setting configuration includes the Voice VLAN State, Voice VLAN Port Setting and OUI list. Table 4-9-3 shows the items of Voice VLAN Setting functions.

Voice VLAN Setting Configuration	
Item	Description
Voice VLAN State	Configure and display Voice VLAN State settings on this web page.
Voice VLAN Port Setting	Configure and display Voice VLAN Port Setting on this web page.
OUI List	Configure and display OUI List settings on this web page.

Table 4-9-3: Descriptions of Voice VLAN Setting Configuration

4.9.9.1 Voice VLAN State


This page allows you to configure the Voice VLAN State settings for Web Smart Switch as the screen in [Figure 4-9-29](#) appears.

Figure 4-9-29: Voice VLAN State Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• State	This column provides configuring enable or disable the Voice VLAN function.
• Voice VLAN ID	This column provides inputting the Voice VLAN ID; the default value is 4080.
• Aging Time	This column provides configuring the value for Bridge Max Age; the default value is 1440 minute and the available range is 5 to 43200 minutes.
• VLAN Priority	This column provides displaying the VLAN priority information.

Button



: press this button to take effect.

4.9.9.2 Voice VLAN Port Setting

This page allows you to configure the Voice VLAN Port settings for Web Smart Switch as the screen in [Figure 4-9-30](#) appears.

Voice VLAN Port Setting

Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Mode
 ▼

Apply

Port	Mode
1	Manual
2	Manual
3	Manual
4	Manual
5	Manual
6	Manual
7	Manual
8	Manual

Figure 4-9-30: Voice VLAN Port Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port Selection	This column provides selecting specific port for Voice VLAN Port Settings function.
• Mode	This column provides automatically or manually configuring Voice VLAN Port Settings function.
• Port	Display per port list.
• Mode	Display per port Voice VLAN operation mode.

Button

Apply

: press this button to take effect.

4.9.9.3 OUI List

This page allows you to configure the Voice VLAN OUI settings for Web Smart Switch as the screen in [Figure 4-9-31](#) appears.

OUI List

OUI MAC

00:30:4F

OUI Mask

Description

Apply

OUI MAC	OUI Mask	Description	Action
---------	----------	-------------	--------

Figure 4-9-31: Voice VLAN OUI Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• OUI MAC	This column provides configuring OUI MAC.
• OUI Mask	This column provides selecting the OUI Mask and the available options are : FF:FF:FF:FF:FF:FF FF:FF:FF:00:00:00 FF:FF:00:00:00:00
• Description	This column provides configuring description of per OUI MAC address.
• Action	Delete : press this button to delete specific OUI List.

Button

Apply

: press this button to take effect.

4.9.10 LLDP

On this page, **Link Layer Discovery Protocol (LLDP)** is used to discover basic information about neighboring devices on the local broadcast domain. LLDP is a Layer 2 protocol that uses periodic broadcasts to advertise information about the sending device. Advertised information is represented in **Type Length Value (TLV)** format according to the IEEE 802.1ab standard, and can include details such as device identification, capabilities and configuration settings. LLDP also defines how to store and maintain information gathered about the neighboring network nodes it discovers.

The LLDP setting configuration includes the LLDP Global Setting, LLDP Port Setting and table 4-9-4 show the items of LLDP setting functions.

LLDP Configuration	
Item	Description
LLDP Global Setting	Configure and display LLDP Global Settings on this web page.
LLDP Port Setting	Configure and display LLDP Port Settings on this web page.

Table 4-9-4: Descriptions of LLDP Setting Configuration

4.9.10.1 LLDP Global Setting

This page allows you to configure the LLDP Global settings for Web Smart Switch as the screen in [Figure 4-9-32](#) appears.

Figure 4-9-32: LLDP Global Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
• LLDP State	This column provides configuring enable or disable the LLDP function.
• Tx Interval (5-32768)	This column provides configuring Tx Interval settings; the default value is 30 and the available range is 5 to 32678 . Unit is second. The Web Smart Switch is periodically transmitting LLDP frames to its neighbors for having the network discovery information up-to-date. The interval between each LLDP frame is determined by the Tx Interval value. This attribute must comply with the following rule: (Transmission Interval * Hold Time Multiplier) ≤ 65536 , and Transmission Interval ≥ (4 * Delay Interval)
• Tx Hold Multiplier (2-10)	This column provides configuring the value for Tx Hold Multiplier; the default value is 4 minute and the available range is 2 to 10 . Each LLDP frame contains information about how long the information in the LLDP frame will be considered valid. The LLDP information valid period is set to Tx Hold multiplied by Tx Interval seconds. TTL in seconds is based on the following rule: (Transmission Interval * Holdtime Multiplier) ≤ 65536 .

	Therefore, the default TTL is $4 \times 30 = 120$ seconds.
• Re-Init Delay (1-10)	This column provides configuring Re-Init Delay settings; the default value is 2 and the available range is 1 to 10. Unit is second. When a port is disabled, LLDP is disabled or the Web Smart Switch is rebooted a LLDP shutdown frame is transmitted to the neighboring units, signaling that the LLDP information isn't valid anymore. Re-init Delay controls the number of seconds between the shutdown frame and a new LLDP initialization.
• Tx Delay (1-8192)	This column provides configuring Tx Delay settings; the default value is 2 and the available range is 1 to 8192. Unit is second. If some configuration is changed (e.g. the IP address) a new LLDP frame is transmitted, but the time between the LLDP frames will always be at least the value of Tx Delay seconds. Tx Delay cannot be larger than 1/4 of the Tx Interval value. This attribute must comply with the rule: $(4 * \text{Delay Interval}) \leq \text{Transmission Interval}$

Button

: press this button to take effect

4.9.10.2 LLDP Port Setting

This page allows you to configure the LLDP Port settings for Web Smart Switch as the screen in [Figure 4-9-33](#) appears.

LLDP Port Setting

Port Selection																	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

Admin Status: Port Description: System Name: System Description: Capability: Management Address:

Port	Admin Status	Port Description	System Name	System Description	Capability	Management Address
01	Tx & Rx	Disable	Disable	Disable	Disable	Disable
02	Tx & Rx	Disable	Disable	Disable	Disable	Disable
03	Tx & Rx	Disable	Disable	Disable	Disable	Disable
04	Tx & Rx	Disable	Disable	Disable	Disable	Disable
05	Tx & Rx	Disable	Disable	Disable	Disable	Disable
06	Tx & Rx	Disable	Disable	Disable	Disable	Disable
07	Tx & Rx	Disable	Disable	Disable	Disable	Disable
08	Tx & Rx	Disable	Disable	Disable	Disable	Disable
09	Tx & Rx	Disable	Disable	Disable	Disable	Disable
10	Tx & Rx	Disable	Disable	Disable	Disable	Disable

Figure 4-9-33: LLDP Port Settings Configuration Page Screenshot

The page includes the following fields:

Object	Description
Port Selection	This column provides selecting specific port for LLDP Port Settings function.
Admin Status	This column provides displaying and selecting the Admin status of LLDP and the available options are: Disable The Web Smart Switch will not send out LLDP information, and will drop LLDP information received from neighbors. Rx Only The Web Smart Switch will not send out LLDP information, but LLDP information from neighbor units is analyzed. Tx Only The Web Smart Switch will drop LLDP information received from neighbors, but will send out LLDP information. Tx & Rx The switch will send out LLDP information, and will analyze LLDP information received from neighbors.
Port Description	This column provides displaying and configuring enable or disable the Port Description function. When enabling the "Port Description", the LLDP information will be transmitted.
System Name	This column provides displaying and configuring enable or disable the System Name function.

	When enabling the "System Name", the LLDP information will be transmitted.
• System Description	This column provides displaying and configuring enable or disable the System Description function. When enabling the "System Description", the LLDP information will be transmitted.
• Capability	This column provides displaying and configuring enable or disable the Capability function. When enabling the "Capability", the LLDP information will be transmitted.
• Management Address	This column provides displaying and configuring enable or disable the Management Address function. When enabling the "Management Address", the LLDP information will be transmitted.
• Port	Display per port list.

Buttons

Apply

: press this button to take effect.

Refresh

: press this button to refresh current status.

4.10 Monitoring

On the Access Monitoring configuration web page, you can view and configure Monitoring functions of the Web Smart Switch as the screen in [Figure 4-10-1](#) appears.

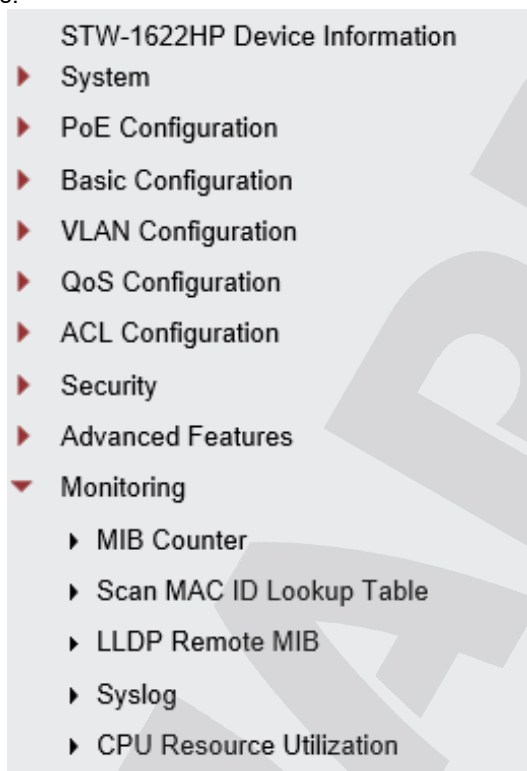


Figure 4-10-1: Web Smart Switch Monitoring Configuration Web Page

Monitoring Configuration	
Item	Description
MIB Counter	Configure and display MIB Counter settings on this web page.
Scan MAC ID Lookup Table	Configure and display Scan MAC ID Lookup Table settings on this web page.
LLDP Remote MIB	Configure and display LLDP Remote MIB settings on this web page.
Syslog	Display System Log information on this web page.
CPU Resource Utilization	Display CPU Resource Utilization information on this web page.

Table 4-10-1: Descriptions of Monitoring Configuration

4.10.1 MIB Counter

This page allows you to configure the MIB Counter settings for Web Smart Switch as the screen in Figure 4-10-2 appears.

MIB Counter						
Port No.	Receive		Transmit		Action	☐
	Packets	Bytes	Packets	Bytes		
01	0	0	0	0	Detail	☐
02	0	0	0	0	Detail	☐
03	0	0	0	0	Detail	☐
04	1919197	2724397048	866416	227567405	Detail	☐
05	0	0	0	0	Detail	☐
06	0	0	0	0	Detail	☐
07	0	0	0	0	Detail	☐
08	253824	296608276	126413	27891068	Detail	☐
09	12564252	3306396908	2365732	3146740992	Detail	☐
10	0	0	0	0	Detail	☐
11	0	0	12198590	3272660069	Detail	☐
12	0	0	0	0	Detail	☐
13	0	0	0	0	Detail	☐
14	0	0	0	0	Detail	☐
					Refresh	Clear

Figure 4-10-2: MIB Counter Configuration Page Screenshot

The page includes the following fields:

Object	Description
• Port No.	This column provides display per port list.
Receive	
• Packets	This column provides displaying per port traffic in packets receive counters.
• Bytes	This column provides displaying per port traffic in bytes receive counters.
Transmit	
• Packets	This column provides displaying per port traffic in packets transmit counters.
• Bytes	This column provides displaying per port traffic in bytes transmit counters.
• Action	This column provides click to select all port or specific port for refresh or clear current MIB counter information.
• Detail	This column provides click to enter advanced per port MIB counter web page.

Buttons

: press this button to refresh current MIB counter information.

: press this button to clear current MIB counter information.

Press **"Detail"** from MIB Counter web page, which allows you to view advanced per port MIB counter information as the screen in [Figure 4-10-3](#) appears

MIB Counter		
Port No.:	4 ▼	Apply
Type	Port 4 Counter	
	Receive	Transmit
64b	13777	354837
65-127b	16067	132346
128-255b	5616	93903
256-511b	26610	52790
512-1023b	53541	225466
1024-1518b	1803585	7074
Oversize	0	0
Bcst	1171	281796
Mcst	1181	349977
Ucst	1916844	234643
Pause	0	0
Pkts	1919197	866416

<<<Back Refresh Clear

Figure 4-10-3: Per Port Detail MIB Counter Page Screenshot

The page includes the following fields:

Object	Description
• Port No.	This column provides displaying per port list.
• Type	This column provides displaying traffic with various packet lengths and types, and the available options are: 64b 65-127b 128-255b 256-511b 512-1023b 1024-1518b Oversize Bcst: Broadcast Mcst: Multicast Ucst: Unicast Pause Pkts Bytes Drop Drop others CRC Alignment

	Runt Frag Jabber Symbol error ACL1 ACL2 Single Col Multiple Col Late Col Defered tx Excessive Col	Buttons
--	---	---------

Port X Counter (X= Port Number)

• Receive	This column displays the counters of per port traffic receive with various packet lengths and types.
• Transmit	This column displays the counters of per port traffic transmit with various packet lengths and types.

: press this button to take effect.

: press this button to refresh current MIB counter information.

: press this button to clear current MIB counter information.

4.10.2 Scan MAC ID Lookup Table

This page allows you to configure the Scan MAC ID Lookup Table settings for Web Smart Switch as the screen in [Figure 4-10-4](#) appears.

Scan MAC ID Lookup Table

MAC Table Clear

Port Selection

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐

All

Clear

Apply

MAC Table Monitor

Entry Number: 15

Refresh

MAC Address	Port
00:4a:20:a2:3e:ea	9
00:d0:89:14:b3:5c	9
00:5a:21:33:29:38	9
18:68:82:35:39:d1	9
60:45:cb:a1:21:d2	9
90:94:e4:72:4d:de	9
d8:50:e6:3d:8a:18	9
18:68:82:b0:16:16	9
94:de:80:10:e9:05	9

Figure 4-10-4: Scan MAC ID Lookup Table Page Screenshot

The page includes the following fields:

Object	Description	Buttons
MAC Table Clear		
• Port Selection	This column provides selecting specific port for Scan MAC ID Lookup Table function.	
MAC Table Monitor		
• Entry Number	This column provides displaying entry number of MAC address table.	
• MAC Address	This column provides displaying per port MAC address table information.	
• Port	This column provides displaying port list.	

- All

: press this button to select all ports.
- Clear

: press this button to clear all selected ports.
- Apply

: press this button to take effect.
- Refresh

: press this button to refresh current Scan MAC ID Lookup Table information.

4.10.3 LLDP Remote MIB

This page allows you to configure the LLDP Remote MIB settings for Web Smart Switch as the screen in [Figure 4-10-5](#) appears.

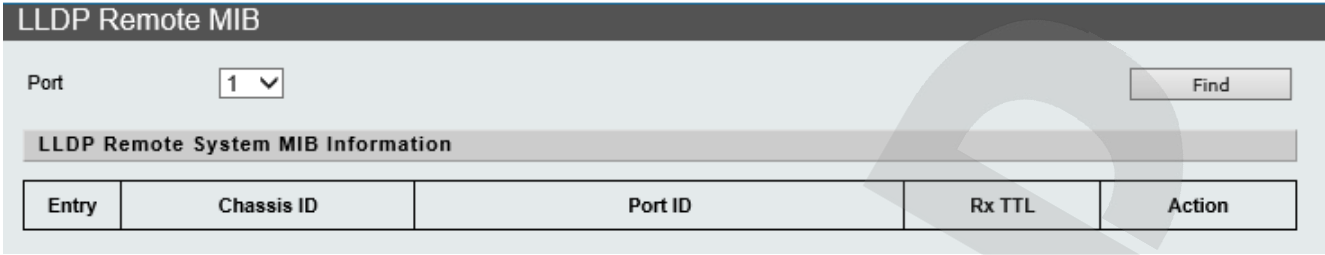


Figure 4-10-5: LLDP Remote MIB Page Screenshot

The page includes the following fields:

Object	Description
• Port	This column provides selecting specific port for LLDP Remote MIB function.
LLDP Remote System MIB Information	
• Entry	This column provides displaying entry number of LLDP Remote MIB information.
• Chassis ID	This column provides displaying chassis ID of LLDP Remote MIB information.
• Port ID	This column provides displaying Port ID of LLDP Remote MIB information.
• Rx TTL	This column provides displaying Rx TTL of LLDP Remote MIB information.
• Action	Delete : press this button to delete specific LLDP Remote MIB information.

Button

Find

: press this button to find LLDP Remote MIB information of specific port.

4.10.4 Syslog

This page allows you to view the Syslog for Web Smart Switch as the screen in [Figure 4-10-6](#) appears.

Syslog	
Refresh	
Index	Log Message
1	Jan 1 00:00:21 kernel: Dentry cache hash table entries: 8192 (order: 3, 32768 bytes)
2	Jan 1 00:00:21 kernel: Inode-cache hash table entries: 4096 (order: 2, 16384 bytes)
3	Jan 1 00:00:21 kernel: cpu_cache_init
4	Jan 1 00:00:21 kernel: Primary instruction cache 16kB, linesize 32 bytes.
5	Jan 1 00:00:21 kernel: Primary data cache 16kB, linesize 32 bytes.
6	Jan 1 00:00:21 kernel: Memory: 60524k/65536k available (2628k kernel code, 5012k reserved, 391k data, 168k init, 0k highmem)
7	Jan 1 00:00:21 kernel: NR_IRQS:32
8	Jan 1 00:00:21 kernel: Console: colour dummy device 80x25
9	Jan 1 00:00:21 kernel: Calibrating delay loop... 148.88 BogoMIPS (lpj=744448)
10	Jan 1 00:00:21 kernel: pid_max: default: 4096 minimum: 301
11	Jan 1 00:00:21 kernel: Mount-cache hash table entries: 512
12	Jan 1 00:00:21 kernel: NET: Registered protocol family 16
13	Jan 1 00:00:21 kernel: platform_device_register(&ip211_sf_pdevice)
14	Jan 1 00:00:21 kernel: platform_device_register(&ip211_mac_pdevice)
15	Jan 1 00:00:21 kernel: platform_device_register(&ip211_i2c_pdevice)

Figure 4-10-6: Syslog Page Screenshot

The page includes the following fields:

Object	Description
• Index	This column provides displaying per index list.
• Log Message	This column provides displaying log message information of per index.

Button

[Refresh](#)

: press this button to refresh current Syslog log message information.

4.10.5 CPU Resource Utilization

This page allows you to view the CPU resource utilization of Web Smart Switch as the screen in [Figure 4-10-7](#) appears.

CPU Resource Utilization	
Free Memory :	23084K
CPU Usage :	20%

Figure 4-10-7: CPU Resource Utilization Page Screenshot

The page includes the following fields:

Object	Description
• Free Memory	This column provides displaying the free memory status.
• CPU Usage	This column provides displaying the CPU Usage status.

5. SWITCH OPERATION

5.1 Address Table

The **Web Smart Switch** is implemented with an address table. This address table is composed of many entries. Each entry is used to store the address information of some node in network, including MAC address, port no., etc. This information comes from the learning process of **Web Smart Switch**.

5.2 Learning

When one packet comes in from any port, the **Web Smart Switch** will record the source address, port no., and the other related information in the address table. This information will be used to decide either forwarding or filtering for future packets.

5.3 Forwarding & Filtering

When one packet comes from some port of the **Web Smart Switch**, it will also check the destination address besides the source address learning. The **Web Smart Switch** will look up the address-table for the destination address. If not found, this packet will be forwarded to all the other ports except the port, which this packet comes in. And these ports will transmit this packet to the network it connected. If found, and the destination address is located at different port from this packet comes in, the **Web Smart Switch** will forward this packet to the port where this destination address is located according to the information from address table. But, if the destination address is located at the same port with this packet comes in, then this packet will be filtered. Thereby increasing the network throughput and availability.

5.4 Store-and-Forward

Store-and-Forward is one type of packet-forwarding techniques. A Store-and-Forward **Web Smart Switch** stores the incoming frame in an internal buffer, and does the complete error checking before transmission. Therefore, no error will occur. Choosing a network that needs efficiency and stability is the best choice.

The **Web Smart Switch** scans the destination address from the packet-header, searches the routing table provided for the incoming port and forwards the packet, only if required. The fast forwarding makes the switch attractive for connecting servers directly to the network, thereby increasing throughput and availability. However, the switch is most commonly used to segment the existing hubs, which nearly always improves the overall performance. An Ethernet Switching can be easily configured in any Ethernet network environment to significantly boost bandwidth using conventional cabling and adapters.

Due to the learning function of the **Web Smart Switch**, the source address and corresponding port number of each incoming and outgoing packet are stored in a routing table. This information is subsequently used to filter packets whose destination address is on the same segment as the source address. This confines network traffic to its respective domain and reduce the overall load on the network.

The **Web Smart Switch** performs "**Store and Forward**"; therefore, no error packets occur. More reliably, it reduces the re-transmission rate. No packet loss will occur.

5.5 Auto-Negotiation

The STP ports on the Switch have built-in "**Auto-negotiation**". This technology automatically sets the best possible bandwidth when a connection is established with another network device (usually at Power On or Reset). This is done by detecting the modes and speeds at the second of both devices is connected and capable of. Both 10BASE-T and 100BASE-TX devices can connect with the port in either Half- or Full-Duplex mode. 1000BASE-T can be only connected in Full-duplex mode.

6. Power over Ethernet Overview

What is PoE?

The PoE is an abbreviation of Power over Ethernet; the PoE technology means a system to pass electrical power safely, along with data on Ethernet UTP cable. The IEEE standard for PoE technology requires Category 5 cable or higher for high power PoE levels, but can operate with category 3 cable for low power levels. Power is supplied in common mode over two or more of the differential pairs of wires found in the Ethernet cables and comes from a power supply within a PoE-enabled networking device such as an Ethernet switch or can be injected into a cable run with a mid-span power supply.

The original IEEE 802.3af-2003 PoE standard provides up to 15.4 W of DC power (minimum 44 V DC and 350mA) to each device. Only 12.95 W is assured to be available at the powered device as some power is dissipated in the cable.

The updated IEEE 802.3at-2009 PoE standard also known as PoE+ or PoE plus, provides up to 25.5 W of power. The 2009 standard prohibits a powered device from using all four pairs for power

The 802.3af / 802.3at define two types of source equipment: Mid-Span and End-Span.

Mid-Span

Mid-Span device is placed between legacy switch and the powered device. Mid-Span is tapping the unused wire pairs 4/5 and 7/8 to carry power, the other four is for data transmit.

End-Span

End-Span device is direct connecting with power device. End-Span could also tap the wire 1/2 and 3/6.

PoE System Architecture

The specification of PoE typically requires two devices: the **Powered Source Equipment (PSE)** and the **Powered Device (PD)**. The PSE is either an End-Span or a Mid-Span, while the PD is a PoE-enabled terminal, such as IP Phones, Wireless LAN, etc. Power can be delivered over data pairs or spare pairs of standard CAT-5 cabling.

Powered Source Equipment (PSE)

Power sourcing equipment (PSE) is a device such as a switch that provides (sources) power on the Ethernet cable. The maximum allowed continuous output power per cable in IEEE 802.3af is 15.40 W. A later specification, IEEE 802.3at, offers 25.50 W. When the device is a switch, it is commonly called an End-span (although IEEE 802.3af refers to it as endpoint). Otherwise, if it's an intermediary device between a non PoE capable switch and a PoE device, it's called a Mid-span. An external PoE injector is a Mid-span device.

Powered device

A powered device (PD) is a device powered by a PSE and thus consumes energy. Examples include wireless access points, IP Phones, and IP cameras. Many powered devices have an auxiliary power connector for an optional, external, power supply. Depending on the PD design, some, none, or all power can be supplied from the auxiliary port, with the auxiliary port sometimes acting as backup power in case of PoE supplied power failure.

How Power is Transferred Through the Cable

A standard CAT5 Ethernet cable has four twisted pairs, but only two of these are used for 10BASE-T and 100BASE-TX. The specification allows two options for using these cables for power, shown in Figure 1 and Figure 2:

The spare pairs are used. Figure 1 shows the pair on pins 4 and 5 connected together and forming the positive supply, and the pair on pins 7 and 8 connected and forming the negative supply. (In fact, a late change to the spec allows either polarity to be used).

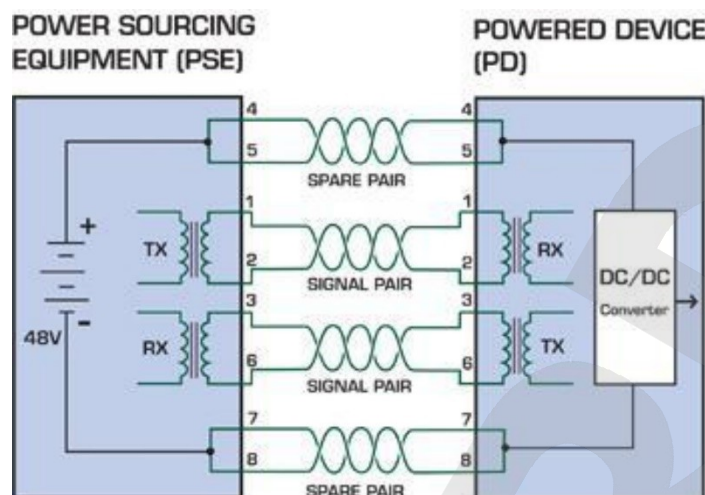


Figure 8-1: Power Supplied over the Spare Pins

The data pairs are used. Since Ethernet pairs are transformer coupled at each end, it is possible to apply DC power to the center tap of the isolation transformer without upsetting the data transfer. In this mode of operation, the pair on pins 3 and 6 and the pair on pins 1 and 2 can be of either polarity.

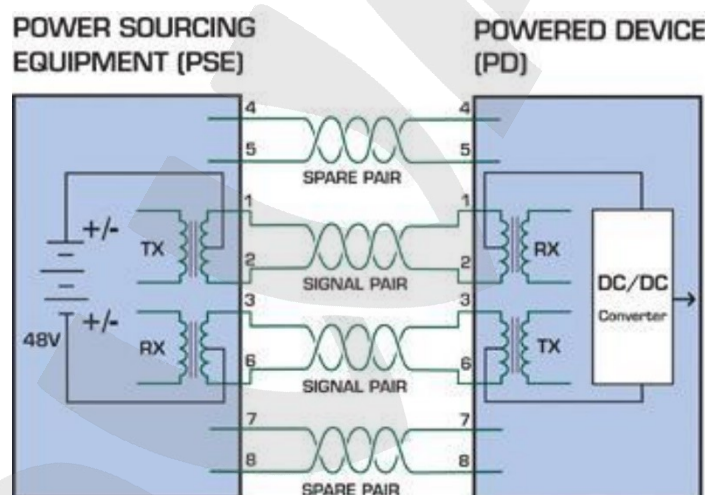


Figure 8-2: Power Supplied over the Data Pins

7. TROUBLESHOOTING

This chapter contains information to help you solve issues. If the Web Smart Switch is not functioning properly, make sure the Web Smart Switch was set up according to instructions in this manual.

■ The Link LED is not lit

Solution:

Check the cable connection and remove duplex mode of the Web Smart Switch

■ Some stations cannot talk to other stations located on the other port

Solution:

Please check the VLAN settings, trunk settings, or port enabled / disabled status.

■ Performance is bad

Solution:

Check the full duplex status of the Web Smart Switch. If the Web Smart Switch is set to full duplex and the partner is set to half duplex, then the performance will be poor. Please also check the in/out rate of the port.

■ Why the Switch doesn't connect to the network

Solution:

1. Check the LNK/ACT LED on the switch
2. Try another port on the Switch
3. Make sure the cable is installed properly
4. Make sure the cable is the right type
5. Turn off the power. After a while, turn on power again

■ 1000BASE-T port link LED is lit, but the traffic is irregular

Solution:

Check that the attached device is not set to dedicate full duplex. Some devices use a physical or software switch to change duplex modes. Auto-negotiation may not recognize this type of full-duplex setting.

■ Switch does not power up

Solution:

1. AC power cord not inserted or faulty
2. Check that the AC power cord is inserted correctly
3. Replace the power cord If the cord is inserted correctly, check that the AC power source is working by connecting a different device in place of the switch.
4. If that device works, refer to the next step.
5. If that device does not work, check the AC power

- IP address has been changed or admin password has been forgotten –

Solution:

To reset the IP address to the default IP address “**192.168.0.100**” or reset the login password to default value, press the hardware-based **reset button** on the front panel for about **5 seconds**. After the device is rebooted, you can log in to the management Web interface within the same subnet of 192.168.0.xx.

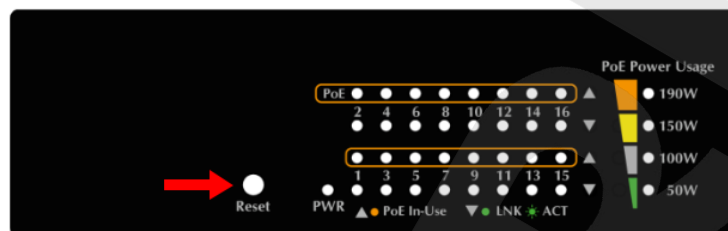



Figure 9-1: STW-1622HP Reset Button

APPENDIX A: Networking Connection

A.1 PoE RJ45 Port Pin Assignments

	PIN NO	RJ45 POWER ASSIGNMENT
	1	• Power +
	2	• Power +
	3	• Power -
	6	• Power -

A.2 Switch's Data RJ45 Pin Assignments -- 1000Mbps, 1000BASE-T

PIN NO	MDI	MDI-X
1	BI_DA+	BI_DB+
2	BI_DA-	BI_DB-
3	BI_DB+	BI_DA+
4	BI_DC+	BI_DD+
5	BI_DC-	BI_DD-
6	BI_DB-	BI_DA-
7	BI_DD+	BI_DC+
8	BI_DD-	BI_DC-


Implicit implementation of the crossover function within a twisted-pair cable, or at a wiring panel, while not expressly forbidden, is beyond the scope of this standard.

A.3 10/100Mbps, 10/100BASE-TX

When connecting your Switch to another Fast Ethernet switch, a bridge or a hub, a straight or crossover cable is necessary. Each port of the Switch supports auto-MDI/MDI-X detection. That means you can directly connect the Switch to any Ethernet devices without making a crossover cable. The following table and diagram show the standard RJ45 receptacle/ connector and their pin assignments:

RJ45 Connector pin assignment		
PIN NO	MDI	MDI-X
	Media Dependent Interface	Media Dependent Interface -- Cross
1	Tx + (transmit)	Rx + (receive)
2	Tx - (transmit)	Rx - (receive)
3	Rx + (receive)	Tx + (transmit)
4, 5	Not used	
6	Rx - (receive)	Tx - (transmit)
7, 8	Not used	

The standard cable, RJ45 pin assignment

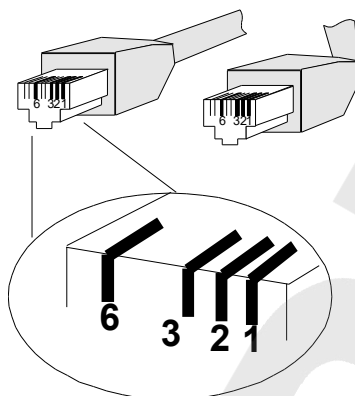

The standard RJ45 receptacle/connector

There are 8 wires on a standard UTP/STP cable and each wire is color-coded. The following shows the pin allocation and color of straight cable and crossover cable connection:

Straight Cable									SIDE 1	SIDE2
1	2	3	4	5	6	7	8		1 = White / Orange	1 = White / Orange
									2 = Orange	2 = Orange
									3 = White / Green	3 = White / Green
									4 = Blue	4 = Blue
									5 = White / Blue	5 = White / Blue
									6 = Green	6 = Green
									7 = White / Brown	7 = White / Brown
									8 = Brown	8 = Brown
1	2	3	4	5	6	7	8	SIDE 2		
Crossover Cable									SIDE 1	SIDE2
1	2	3	4	5	6	7	8		1 = White / Orange	1 = White / Green
									2 = Orange	2 = Green
									3 = White / Green	3 = White / Orange
									4 = Blue	4 = Blue
									5 = White / Blue	5 = White / Blue
									6 = Green	6 = Orange
									7 = White / Brown	7 = White / Brown
									8 = Brown	8 = Brown
1	2	3	4	5	6	7	8	SIDE 2		

Figure A-1: Straight-through and Crossover Cable

Please make sure your connected cables are with same pin assignment and color as the above table before deploying the cables into your network.

APPENDIX B: GLOSSARY

A

ACE

ACE is an acronym for Access Control Entry. It describes access permission associated with a particular ACE ID.

There are three ACE frame types (Ethernet Type, ARP, and IPv4) and two ACE actions (permit and deny). The ACE also contains many detailed, different parameter options that are available for individual application.

ACL

ACL is an acronym for Access Control List. It is the list table of ACEs, containing access control entries that specify individual users or groups permitted or denied to specific traffic objects, such as a process or a program.

Each accessible traffic object contains an identifier to its ACL. The privileges determine whether there are specific traffic object access rights.

ACL implementations can be quite complex, for example, when the ACEs are prioritized for the various situation. In networking, the ACL refers to a list of service ports or network services that are available on a host or server, each with a list of hosts or servers permitted or denied to use the service. ACL can generally be configured to control inbound traffic, and in this context, they are similar to firewalls.

There are 3 web-Pages associated with the manual ACL configuration:

ACL|Access Control List: The web Page shows the ACEs in a prioritized way, highest (top) to lowest (bottom). Default the table is empty. An ingress frame will only get a hit on one ACE even though there are more matching ACEs. The first matching ACE will take action (permit/deny) on that frame and a counter associated with that ACE is incremented. An ACE can be associated with a Policy, 1 ingress port, or any ingress port (the whole switch). If an ACE Policy is created then that Policy can be associated with a group of ports under the "Ports" web-Page. There are number of parameters that can be configured with an ACE. Read the Web Page help text to get further information for each of them. The maximum number of ACEs is 64.

ACL|Ports: The ACL Ports configuration is used to assign a Policy ID to an ingress port. This is useful to group ports to obey the same traffic rules. Traffic Policy is created under the "Access Control List" - Page. You can you also set up specific traffic properties (Action / Rate Limiter / Port copy, etc) for each ingress port. They will though only apply if the frame gets past the ACE matching without getting matched. In that case a counter associated with that port is incremented. See the Web Page help text for each specific port property.

ACL|Rate Limiters: Under this Page you can configure the rate limiters. There can be 15 different rate limiters, each ranging from 1-1024K packets per seconds. Under "Ports" and "Access Control List" web-Pages you can assign a Rate Limiter ID to the ACE(s) or ingress port(s).

AES

AES is an acronym for Advanced Encryption Standard. The encryption key protocol is applied in 802.1i standard to improve WLAN security. It is an encryption standard by the U.S. government, which will replace DES and 3DES. AES has a fixed block size of 128 bits and a key size of 128, 192, or 256 bits.

AMS

AMS is an acronym for Auto Media Select. AMS is used for dual media ports (ports supporting both copper (cu) and fiber (SFP) cables. AMS automatically determines if a SFP or a CU cable is inserted and switches to the corresponding media. If both SFP and cu cables are inserted, the port will select the preferred media.

APS

APS is an acronym for Automatic Protection Switching. This protocol is used to secure that switching is done bidirectional in the two ends of a protection group, as defined in G.8031.

Aggregation

Using multiple ports in parallel to increase the link speed beyond the limits of a port and to increase the redundancy for higher availability.

(Also *Port Aggregation*, *Link Aggregation*).

ARP

ARP is an acronym for Address Resolution Protocol. It is a protocol that used to convert an IP address into a physical address, such as an Ethernet address. ARP allows a host to communicate with other hosts when only the Internet address of its neighbors is known. Before using IP, the host sends a broadcast ARP request containing the Internet address of the desired destination system.

ARP Inspection

ARP Inspection is a secure feature. Several types of attacks can be launched against a host or devices connected to Layer 2 networks by "poisoning" the ARP caches. This feature is used to block such attacks. Only valid ARP requests and responses can go through the switch device.

Auto-Negotiation

Auto-negotiation is the process where two different devices establish the mode of operation and the speed settings that can be shared by those devices for a link.

CC

CC is an acronym for Continuity Check. It is a MEP functionality that is able to detect loss of continuity in a network by transmitting CCM frames to a peer MEP.

CCM

CCM is an acronym for Continuity Check Message. It is a OAM frame transmitted from a MEP to its peer MEP and used to implement CC functionality.

CDP

CDP is an acronym for Cisco Discovery Protocol.

D**DEI**

DEI is an acronym for Drop Eligible Indicator. It is a 1-bit field in the VLAN tag.

DES

DES is an acronym for Data Encryption Standard. It provides a complete description of a mathematical algorithm for encrypting (enciphering) and decrypting (deciphering) binary coded information.

Encrypting data converts it to an unintelligible form called cipher. Decrypting cipher converts the data back to its original form called plaintext. The algorithm described in this standard specifies both enciphering and deciphering operations which are based on a binary number called a key.

DHCP

DHCP is an acronym for Dynamic Host Configuration Protocol. It is a protocol used for assigning dynamic IP addresses to devices on a network.

DHCP used by networked computers (clients) to obtain IP addresses and other parameters such as the default gateway, subnet mask, and IP addresses of DNS servers from a DHCP server.

The DHCP server ensures that all IP addresses are unique, for example, no IP address is assigned to a second client while the first client's assignment is valid (its lease has not expired). Therefore, IP address pool management is done by the server and not by a human network administrator.

Dynamic addressing simplifies network administration because the software keeps track of IP addresses rather than requiring an administrator to manage the task. This means that a new computer can be added to a network without the hassle of manually assigning it a unique IP address.

DHCP Relay

DHCP Relay is used to forward and to transfer DHCP messages between the clients and the server when they are not on the same subnet domain.

The DHCP option 82 enables a DHCP relay agent to insert specific information into a DHCP request packets when forwarding client DHCP packets to a DHCP server and remove the specific information from a DHCP reply packets when forwarding server DHCP packets to a DHCP client. The DHCP server can use this information to implement IP address or other assignment policies. Specifically, the option works by setting two sub-options: Circuit ID (option 1) and Remote ID (option2). The Circuit ID sub-option is supposed to include information specific to which circuit the request came in on. The Remote ID sub-option was designed to carry information relating to the remote host end of the circuit.

The definition of Circuit ID in the switch is 4 bytes in length and the format is "vlan_id" "module_id" "port_no". The parameter of "vlan_id" is the first two bytes represent the VLAN ID. The parameter of "module_id" is the third byte for the module ID (in standalone switch it always equal 0, in stackable switch it means switch ID). The parameter of "port_no" is the fourth byte and it means the port number.

The Remote ID is 6 bytes in length, and the value is equal the DHCP relay agents MAC address.

DHCP Snooping

DHCP Snooping is used to block intruder on the untrusted ports of the switch device when it tries to intervene by injecting a bogus DHCP reply packet to a legitimate conversation between the DHCP client and server.

DNS

DNS is an acronym for Domain Name System. It stores and associates many types of information with domain names. Most importantly, DNS translates human-friendly domain names and computer hostnames into computer-friendly IP addresses. For example, the domain name www.example.com might translate to 192.168.0.1.

DoS

DoS is an acronym for Denial of Service. In a denial-of-service (DoS) attack, an attacker attempts to prevent legitimate users from accessing information or services. By targeting at network sites or network connection, an attacker may be able to prevent network users from accessing email, web sites, online accounts (banking, etc.), or other services that rely on the affected computer.

Dotted Decimal Notation

Dotted Decimal Notation refers to a method of writing IP addresses using decimal numbers and dots as separators between octets.

An IPv4 dotted decimal address has the form x.y.z.w, where x, y, z, and w are decimal numbers between 0 and 255.

DSCP

DSCP is an acronym for Differentiated Services Code Point. It is a field in the header of IP packets for packet classification purposes.

E

EEE

EEE is an abbreviation for Energy Efficient Ethernet defined in IEEE 802.3az.

EPS

EPS is an abbreviation for Ethernet Protection Switching defined in ITU/T G.8031.

Ethernet Type

Ethernet Type, or EtherType, is a field in the Ethernet MAC header, defined by the Ethernet networking standard. It is used to indicate which protocol is being transported in an Ethernet frame.

F

FTP

FTP is an acronym for File Transfer Protocol. It is a transfer protocol that uses the Transmission Control Protocol (TCP) and provides file writing and reading. It also provides directory service and security features.

Fast Leave

IGMP snooping Fast Leave processing allows the switch to remove an interface from the forwarding-table entry without first sending out group specific queries to the interface. The VLAN interface is pruned from the multicast tree for the multicast group specified in the original leave message. Fast-leave processing ensures optimal bandwidth management for all hosts on a switched network, even when multiple multicast groups are in use simultaneously.

H

HTTP

HTTP is an acronym for Hypertext Transfer Protocol. It is a protocol that used to transfer or convey information on the World Wide Web (WWW).

HTTP defines how messages are formatted and transmitted, and what actions Web servers and browsers should take in response to various commands. For example, when you enter a URL in your browser, this actually sends an HTTP command to the Web server directing it to fetch and transmit the requested Web Page. The other main standard that controls how the World Wide Web works is HTML, which covers how Web Pages are formatted and displayed.

Any Web server machine contains, in addition to the Web Page files it can serve, an HTTP daemon, a program that is designed to wait for HTTP requests and handle them when they arrive. The Web browser is an HTTP client, sending

requests to server machines. An HTTP client initiates a request by establishing a Transmission Control Protocol (TCP) connection to a particular port on a remote host (port 80 by default). An HTTP server listening on that port waits for the client to send a request message.

HTTPS

HTTPS is an acronym for Hypertext Transfer Protocol over Secure Socket Layer. It is used to indicate a secure HTTP connection.

HTTPS provide authentication and encrypted communication and is widely used on the World Wide Web for security-sensitive communication such as payment transactions and corporate logons.

HTTPS is really just the use of Netscape's Secure Socket Layer (SSL) as a sublayer under its regular HTTP application layering. (HTTPS uses port 443 instead of HTTP port 80 in its interactions with the lower layer, TCP/IP.) SSL uses a 40-bit key size for the RC4 stream encryption algorithm, which is considered an adequate degree of encryption for commercial exchange.

ICMP

ICMP is an acronym for Internet Control Message Protocol. It is a protocol that generated the error response, diagnostic or routing purposes. ICMP messages generally contain information about routing difficulties or simple exchanges such as time-stamp or echo transactions. For example, the PING command uses ICMP to test an Internet connection.

IEEE 802.1X

IEEE 802.1X is an IEEE standard for port-based Network Access Control. It provides authentication to devices attached to a LAN port, establishing a point-to-point connection or preventing access from that port if authentication fails. With 802.1X, access to all switch ports can be centrally controlled from a server, which means that authorized users can use the same credentials for authentication from any point within the network.

IGMP

IGMP is an acronym for Internet Group Management Protocol. It is a communications protocol used to manage the membership of Internet Protocol multicast groups. IGMP is used by IP hosts and adjacent multicast routers to establish multicast group memberships. It is an integral part of the IP multicast specification, like ICMP for unicast connections. IGMP can be used for online video and gaming, and allows more efficient use of resources when supporting these uses.

IGMP Querier

A router sends IGMP Query messages onto a particular link. This router is called the Querier.

IMAP

IMAP is an acronym for Internet Message Access Protocol. It is a protocol for email clients to retrieve email messages from a mail server.

IMAP is the protocol that IMAP clients use to communicate with the servers, and SMTP is the protocol used to transport mail to an IMAP server.

The current version of the Internet Message Access Protocol is IMAP4. It is similar to Post Office Protocol version 3 (POP3), but offers additional and more complex features. For example, the IMAP4 protocol leaves your email messages on the server rather than downloading them to your computer. If you wish to remove your messages from the server, you must use your mail client to generate local folders, copy messages to your local hard drive, and then delete and expunge the messages from the server.

IP

IP is an acronym for Internet Protocol. It is a protocol used for communicating data across an internet network.

IP is a "best effort" system, which means that no packet of information sent over it is assured to reach its destination in the same condition it was sent. Each device connected to a Local Area Network (LAN) or Wide Area Network (WAN) is given an Internet Protocol address, and this IP address is used to identify the device uniquely among all other devices connected to the extended network.

The current version of the Internet protocol is IPv4, which has 32-bits Internet Protocol addresses allowing for in excess of four billion unique addresses. This number is reduced drastically by the practice of webmasters taking addresses in large blocks, the bulk of which remain unused. There is a rather substantial movement to adopt a new version of the Internet Protocol, IPv6, which would have 128-bits Internet Protocol addresses. This number can be represented roughly by a three with thirty-nine zeroes after it. However, IPv4 is still the protocol of choice for most of the Internet.

IPMC

IPMC is an acronym for IP MultiCast.

IP Source Guard

IP Source Guard is a secure feature used to restrict IP traffic on DHCP snooping untrusted ports by filtering traffic based on the DHCP Snooping Table or manually configured IP Source Bindings. It helps prevent IP spoofing attacks when a host tries to spoof and use the IP address of another host.

L

LACP

LACP is an IEEE 802.3ad standard protocol. The Link Aggregation Control Protocol, allows bundling several physical ports together to form a single logical port.

LLDP

LLDP is an IEEE 802.1ab standard protocol.

The Link Layer Discovery Protocol(LLDP) specified in this standard allows stations attached to an IEEE 802 LAN to advertise, to other stations attached to the same IEEE 802 LAN, the major capabilities provided by the system incorporating that station, the management address or addresses of the entity or entities that provide management of those capabilities, and the identification of the stations point of attachment to the IEEE 802 LAN required by those management entity or entities. The information distributed via this protocol is stored by its recipients in a standard Management Information Base (MIB), making it possible for the information to be accessed by a Network Management System (NMS) using a management protocol such as the Simple Network Management Protocol (SNMP).

LLDP-MED

LLDP-MED is an extension of IEEE 802.1ab and is defined by the telecommunication industry association (TIA-1057).

LOC

LOC is an acronym for Loss Of Connectivity and is detected by a MEP and is indicating lost connectivity in the network. Can be used as a switch criteria by EPS

M

MAC Table

Switching of frames is based upon the DMAC address contained in the frame. The switch builds up a table that maps MAC addresses to switch ports for knowing which ports the frames should go to (based upon the DMAC address in the frame). This table contains both static and dynamic entries. The static entries are configured by the network administrator if the administrator wants to do a fixed mapping between the DMAC address and switch ports.

The frames also contain a MAC address (SMAC address), which shows the MAC address of the equipment sending the frame. The SMAC address is used by the switch to automatically update the MAC table with these dynamic MAC addresses. Dynamic entries are removed from the MAC table if no frame with the corresponding SMAC address have been seen after a configurable age time.

MEP

MEP is an acronym for Maintenance Entity Endpoint and is an endpoint in a Maintenance Entity Group (ITU-T Y.1731).

MD5

MD5 is an acronym for Message-Digest algorithm 5. MD5 is a message digest algorithm, used cryptographic hash function with a 128-bit hash value. It was designed by Ron Rivest in 1991. MD5 is officially defined in RFC 1321 - The MD5 Message-Digest Algorithm.

Mirroring

For debugging network problems or monitoring network traffic, the switch system can be configured to mirror frames from multiple ports to a mirror port. (In this context, mirroring a frame is the same as copying the frame.)

Both incoming (source) and outgoing (destination) frames can be mirrored to the mirror port.

MLD

MLD is an acronym for Multicast Listener Discovery for IPv6. MLD is used by IPv6 routers to discover multicast listeners on a directly attached link, much as IGMP is used in IPv4. The protocol is embedded in ICMPv6 instead of using a separate protocol.

MVR

Multicast VLAN Registration (MVR) is a protocol for Layer 2 (IP)-networks that enables multicast-traffic from a source VLAN to be shared with subscriber-VLANs.

The main reason for using MVR is to save bandwidth by preventing duplicate multicast streams being sent in the core network, instead the stream(s) are received on the MVR-VLAN and forwarded to the VLANs where hosts have requested it/them (Wikipedia).

N

NAS

NAS is an acronym for Network Access Server. The NAS is meant to act as a gateway to guard access to a protected source. A client connects to the NAS, and the NAS connects to another resource asking whether the client's supplied credentials are valid. Based on the answer, the NAS then allows or disallows access to the protected resource. An example of a NAS implementation is IEEE 802.1X.

NetBIOS

NetBIOS is an acronym for Network Basic Input/Output System. It is a program that allows applications on separate computers to communicate within a Local Area Network (LAN), and it is not supported on a Wide Area Network (WAN).

The NetBIOS giving each computer in the network both a NetBIOS name and an IP address corresponding to a different host name, provides the session and transport services described in the Open Systems Interconnection (OSI) model.

NFS

NFS is an acronym for **N**etwork **F**ile **S**ystem. It allows hosts to mount partitions on a remote system and use them as though they are local file systems.

NFS allows the system administrator to store resources in a central location on the network, providing authorized users continuous access to them, which means NFS supports sharing of files, printers, and other resources as persistent storage over a computer network.

NTP

NTP is an acronym for **N**etwork **T**ime **P**rotocol, a network protocol for synchronizing the clocks of computer systems. NTP uses UDP (datagrams) as transport layer.

O

OAM

OAM is an acronym for **O**peration **A**dministration and **M**aintenance.

It is a protocol described in ITU-T Y.1731 used to implement carrier ethernet functionality. MEP functionality like CC and RDI is based on this.

Optional TLVs.

A LLDP frame contains multiple TLVs

For some TLVs it is configurable if the switch shall include the TLV in the LLDP frame. These TLVs are known as optional TLVs. If an optional TLVs is disabled the corresponding information is not included in the LLDP frame.

OUI

OUI is the organizationally unique identifier. An OUI address is a globally unique identifier assigned to a vendor by IEEE. You can determine which vendor a device belongs to according to the OUI address which forms the first 24 bits of a MAC address.

P

PCP

PCP is an acronym for Priority Code Point. It is a 3-bit field storing the priority level for the 802.1Q frame. It is also known as User Priority.

PD

PD is an acronym for Powered Device. In a PoE system the power is delivered from a PSE (power sourcing equipment) to a remote device. The remote device is called a PD.

PHY

PHY is an abbreviation for Physical Interface Transceiver and is the device that implements the Ethernet physical layer (IEEE-802.3).

PING

ping is a program that sends a series of packets over a network or the Internet to a specific computer in order to generate a response from that computer. The other computer responds with an acknowledgment that it received the packets. Ping was created to verify whether a specific computer on a network or the Internet exists and is connected.

ping uses Internet Control Message Protocol (ICMP) packets. The PING Request is the packet from the origin computer, and the PING Reply is the packet response from the target.

Policer

A policer can limit the bandwidth of received frames. It is located in front of the ingress queue.

POP3

POP3 is an acronym for Post Office Protocol version 3. It is a protocol for email clients to retrieve email messages from a mail server.

POP3 is designed to delete mail on the server as soon as the user has downloaded it. However, some implementations allow users or an administrator to specify that mail be saved for some period of time. POP can be thought of as a "store-and-forward" service.

An alternative protocol is Internet Message Access Protocol (IMAP). IMAP provides the user with more capabilities for retaining e-mail on the server and for organizing it in folders on the server. IMAP can be thought of as a remote file server.

POP and IMAP deal with the receiving of e-mail and are not to be confused with the Simple Mail Transfer Protocol (SMTP). You send e-mail with SMTP, and a mail handler receives it on your recipient's behalf. Then the mail is read

using POP or IMAP. IMAP4 and POP3 are the two most prevalent Internet standard protocols for e-mail retrieval. Virtually all modern e-mail clients and servers support both.

PPPoE

PPPoE is an acronym for Point-to-Point Protocol over Ethernet.

It is a network protocol for encapsulating Point-to-Point Protocol (PPP) frames inside Ethernet frames. It is used mainly with ADSL services where individual users connect to the ADSL transceiver (modem) over Ethernet and in plain Metro Ethernet networks (Wikipedia).

Private VLAN

In a private VLAN, communication between ports in that private VLAN is not permitted. A VLAN can be configured as a private VLAN.

PTP

PTP is an acronym for Precision Time Protocol, a network protocol for synchronizing the clocks of computer systems.

Q

QCE

QCE is an acronym for QoS Control Entry. It describes QoS class associated with a particular QCE ID.

There are six QCE frame types: Ethernet Type, VLAN, UDP/TCP Port, DSCP, TOS, and Tag Priority. Frames can be classified by one of 4 different QoS classes: "Low", "Normal", "Medium", and "High" for individual application.

QCL

QCL is an acronym for QoS Control List. It is the list table of QCEs, containing QoS control entries that classify to a specific QoS class on specific traffic objects.

Each accessible traffic object contains an identifier to its QCL. The privileges determine specific traffic object to specific QoS class.

QL

QL In SyncE this is the Quality Level of a given clock source. This is received on a port in a SSM indicating the quality of the clock received in the port.

QoS

QoS is an acronym for Quality of Service. It is a method to guarantee a bandwidth relationship between individual applications or protocols.

A communications network transports a multitude of applications and data, including high-quality video and delay-sensitive data such as real-time voice. Networks must provide secure, predictable, measurable, and sometimes guaranteed services.

Achieving the required QoS becomes the secret to a successful end-to-end business solution. Therefore, QoS is the set of techniques to manage network resources.

QoS class

Every incoming frame is classified to a QoS class, which is used throughout the device for providing queuing, scheduling and congestion control guarantees to the frame according to what was configured for that specific QoS class. There is a one-to-one mapping between QoS class, queue and priority. A QoS class of 0 (zero) has the lowest priority.

R

RARP

RARP is an acronym for Reverse Address Resolution Protocol. It is a protocol that is used to obtain an IP address for a given hardware address, such as an Ethernet address. RARP is the complement of ARP.

RADIUS

RADIUS is an acronym for Remote Authentication Dial In User Service. It is a networking protocol that provides centralized access, authorization and accounting management for people or computers to connect and use a network service.

RDI

RDI is an acronym for Remote Defect Indication. It is a OAM functionality that is used by a MEP to indicate defect detected to the remote peer MEP

Router Port

A router port is a port on the Ethernet switch that leads switch towards the Layer 3 multicast device.

RSTP

In 1998, the IEEE with document 802.1w introduced an evolution of STP: the Rapid Spanning Tree Protocol, which provides for faster spanning tree convergence after a topology change. Standard IEEE 802.1D-2004 now incorporates RSTP and obsoletes STP, while at the same time being backwards-compatible with STP.

S

SAMBA

Samba is a program running under UNIX-like operating systems that provides seamless integration between UNIX and Microsoft Windows machines. Samba acts as file and print servers for Microsoft Windows, IBM OS/2, and other

SMB client machines. Samba uses the Server Message Block (SMB) protocol and Common Internet File System (CIFS), which is the underlying protocol used in Microsoft Windows networking.

Samba can be installed on a variety of operating system platforms, including Linux, most common Unix platforms, OpenVMS, and IBM OS/2.

Samba can also register itself with the master browser on the network so that it would appear in the listing of hosts in Microsoft Windows "Neighborhood Network".

SHA

SHA is an acronym for Secure Hash Algorithm. It designed by the National Security Agency (NSA) and published by the NIST as a U.S. Federal Information Processing Standard. Hash algorithms compute a fixed-length digital representation (known as a message digest) of an input data sequence (the message) of any length.

Shaper

A shaper can limit the bandwidth of transmitted frames. It is located after the ingress queues.

SMTP

SMTP is an acronym for Simple Mail Transfer Protocol. It is a text-based protocol that uses the Transmission Control Protocol (TCP) and provides a mail service modeled on the FTP file transfer service. SMTP transfers mail messages between systems and notifications regarding incoming mail.

SNAP

The SubNetwork Access Protocol (SNAP) is a mechanism for multiplexing, on networks using IEEE 802.2 LLC, more protocols than can be distinguished by the 8-bit 802.2 Service Access Point (SAP) fields. SNAP supports identifying protocols by Ethernet type field values; it also supports vendor-private protocol identifier.

SNMP

SNMP is an acronym for Simple Network Management Protocol. It is part of the Transmission Control Protocol/Internet Protocol (TCP/IP) protocol for network management. SNMP allow diverse network objects to participate in a network management architecture. It enables network management systems to learn network problems by receiving traps or change notices from network devices implementing SNMP.

SNTP

SNTP is an acronym for Simple Network Time Protocol, a network protocol for synchronizing the clocks of computer systems. SNTP uses UDP (datagrams) as transport layer.

SPROUT

Stack Protocol using Routing Technology. An advanced protocol for almost instantaneous discovery of topology changes within a stack as well as election of a master switch. SPROUT also calculates parameters for setting up each switch to perform shortest path forwarding within the stack.

SSID

Service **S**et **I**dentifier is a name used to identify the particular 802.11 wireless LANs to which a user wants to attach. A client device will receive broadcast messages from all access points within range advertising their SSIDs, and can choose one to connect to based on pre-configuration, or by displaying a list of SSIDs in range and asking the user to select one (Wikipedia).

SSH

SSH is an acronym for **S**ecure **S**hell. It is a network protocol that allows data to be exchanged using a secure channel between two networked devices. The encryption used by SSH provides confidentiality and integrity of data over an insecure network. The goal of SSH was to replace the earlier rlogin, TELNET and rsh protocols, which did not provide strong authentication or guarantee confidentiality (Wikipedia).

SSM

SSM In SyncE this is an abbreviation for Synchronization Status Message and is containing a QL indication.

STP

Spanning **T**ree **P**rotocol is an OSI layer-2 protocol which ensures a loop free topology for any bridged LAN. The original STP protocol is now obsolete by RSTP.

SyncE

SyncE Is an abbreviation for Synchronous Ethernet. This functionality is used to make a network 'clock frequency' synchronized. Not to be confused with real time clock synchronized (IEEE 1588).

T

TACACS+

TACACS+ is an acronym for **T**erminal **A**ccess **C**ontroller **A**ccess **C**ontrol **S**ystem **P**lus. It is a networking protocol which provides access control for routers, network access servers and other networked computing devices via one or more centralized servers. TACACS+ provides separate authentication, authorization and accounting services.

Tag Priority

Tag Priority is a 3-bit field storing the priority level for the 802.1Q frame.

TCP

TCP is an acronym for **T**ransmission **C**ontrol **P**rotocol. It is a communications protocol that uses the Internet Protocol (IP) to exchange the messages between computers.

The TCP protocol guarantees reliable and in-order delivery of data from sender to receiver and distinguishes data for multiple connections by concurrent applications (for example, Web server and e-mail server) running on the same host.

The applications on networked hosts can use TCP to create connections to one another. It is known as a connection-oriented protocol, which means that a connection is established and maintained until such time as the message or

messages to be exchanged by the application programs at each end have been exchanged. TCP is responsible for ensuring that a message is divided into the packets that IP manages and for reassembling the packets back into the complete message at the other end.

Common network applications that use TCP include the World Wide Web (WWW), e-mail, and File Transfer Protocol (FTP).

TFTP

TFTP is an acronym for Tivial File Transfer Protocol. It is transfer protocol that uses the User Datagram Protocol (UDP) and provides file writing and reading, but it does not provides directory service and security features.

ToS

ToS is an acronym for Type of Service. It is implemented as the IPv4 ToS priority control. It is fully decoded to determine the priority from the 6-bit ToS field in the IP header. The most significant 6 bits of the ToS field are fully decoded into 64 possibilities, and the singular code that results is compared against the corresponding bit in the IPv4 ToS priority control bit (0~63).

TLV

TLV is an acronym for Type Length Value. A LLDP frame can contain multiple pieces of information. Each of these pieces of information is known as TLV.

TKIP

TKIP is an acronym for Temporal Key Integrity Protocol. It used in WPA to replace WEP with a new encryption algorithm. TKIP comprises the same encryption engine and RC4 algorithm defined for WEP. The key used for encryption in TKIP is 128 bits and changes the key used for each packet.

U

UDP

UDP is an acronym for User Datagram Protocol. It is a communications protocol that uses the Internet Protocol (IP) to exchange the messages between computers.

UDP is an alternative to the Transmission Control Protocol (TCP) that uses the Internet Protocol (IP). Unlike TCP, UDP does not provide the service of dividing a message into packet datagrams, and UDP doesn't provide reassembling and sequencing of the packets. This means that the application program that uses UDP must be able to make sure that the entire message has arrived and is in the right order. Network applications that want to save processing time because they have very small data units to exchange may prefer UDP to TCP.

UDP provides two services not provided by the IP layer. It provides port numbers to help distinguish different user requests and, optionally, a checksum capability to verify that the data arrived intact.

Common network applications that use UDP include the Domain Name System (DNS), streaming media applications such as IPTV, Voice over IP (VoIP), and Trivial File Transfer Protocol (TFTP).

UPnP

UPnP is an acronym for **U**niversal **P**lug and **P**lay. The goals of UPnP are to allow devices to connect seamlessly and to simplify the implementation of networks in the home (data sharing, communications, and entertainment) and in corporate environments for simplified installation of computer components

User Priority

User Priority is a 3-bit field storing the priority level for the 802.1Q frame.

V

VLAN

Virtual LAN. A method to restrict communication between switch ports. VLANs can be used for the following applications:

VLAN unaware switching: This is the default configuration. All ports are VLAN unaware with Port VLAN ID 1 and members of VLAN 1. This means that MAC addresses are learned in VLAN 1, and the switch does not remove or insert VLAN tags.

VLAN aware switching: This is based on the IEEE 802.1Q standard. All ports are VLAN aware. Ports connected to VLAN aware switches are members of multiple VLANs and transmit tagged frames. Other ports are members of one VLAN, set up with this Port VLAN ID, and transmit untagged frames.

Provider switching: This is also known as Q-in-Q switching. Ports connected to subscribers are VLAN unaware, members of one VLAN, and set up with this unique Port VLAN ID. Ports connected to the service provider are VLAN aware, members of multiple VLANs, and set up to tag all frames. Untagged frames received on a subscriber port are forwarded to the provider port with a single VLAN tag. Tagged frames received on a subscriber port are forwarded to the provider port with a double VLAN tag.

VLAN ID

VLAN ID is a 12-bit field specifying the VLAN to which the frame belongs.

Voice VLAN

Voice VLAN is VLAN configured specially for voice traffic. By adding the ports with voice devices attached to voice VLAN, we can perform QoS-related configuration for voice data, ensuring the transmission priority of voice traffic and voice quality.

W

WEP

WEP is an acronym for Wired Equivalent Privacy. WEP is a deprecated algorithm to secure IEEE 802.11 wireless networks. Wireless networks broadcast messages using radio, so are more susceptible to eavesdropping than wired networks. When introduced in 1999, WEP was intended to provide confidentiality comparable to that of a traditional wired network (Wikipedia).

WiFi

WiFi is an acronym for Wireless Fidelity. It is meant to be used generically when referring of any type of 802.11 network, whether 802.11b, 802.11a, dual-band, etc. The term is promulgated by the Wi-Fi Alliance.

WPA

WPA is an acronym for Wi-Fi Protected Access. It was created in response to several serious weaknesses researchers had found in the previous system, Wired Equivalent Privacy (WEP). WPA implements the majority of the IEEE 802.11i standard, and was intended as an intermediate measure to take the place of WEP while 802.11i was prepared. WPA is specifically designed to also work with pre-WPA wireless network interface cards (through firmware upgrades), but not necessarily with first generation wireless access points. WPA2 implements the full standard, but will not work with some older network cards (Wikipedia).

WPA-PSK

WPA-PSK is an acronym for Wi-Fi Protected Access - Pre Shared Key. WPA was designed to enhance the security of wireless networks. There are two flavors of WPA: enterprise and personal. Enterprise is meant for use with an IEEE 802.1X authentication server, which distributes different keys to each user. Personal WPA utilizes less scalable 'pre-shared key' (PSK) mode, where every allowed computer is given the same passphrase. In PSK mode, security depends on the strength and secrecy of the passphrase. The design of WPA is based on a Draft 3 of the IEEE 802.11i standard (Wikipedia)

WPA-Radius

WPA-Radius is an acronym for Wi-Fi Protected Access - Radius (802.1X authentication server). WPA was designed to enhance the security of wireless networks. There are two flavors of WPA: enterprise and personal. Enterprise is meant for use with an IEEE 802.1X authentication server, which distributes different keys to each user. Personal WPA utilizes less scalable 'pre-shared key' (PSK) mode, where every allowed computer is given the same passphrase. In PSK mode, security depends on the strength and secrecy of the passphrase. The design of WPA is based on a Draft 3 of the IEEE 802.11i standard (Wikipedia)

WPS

WPS is an acronym for Wi-Fi Protected Setup. It is a standard for easy and secure establishment of a wireless home network. The goal of the WPS protocol is to simplify the process of connecting any home device to the wireless network (Wikipedia).

WRED

WRED is an acronym for Weighted Random Early Detection. It is an active queue management mechanism that provides preferential treatment of higher priority frames when traffic builds up within a queue. A frame's DP level is used as input to WRED. A higher DP level assigned to a frame results in a higher probability that the frame is dropped during times of congestion.

WTR

WTR is an acronym for Wait To Restore. This is the time a failure on a resource has to be 'not active' before restoration back to this (previously failing) resource is done.