




DATASHEET TRASSIR TR-NS1106-60-4POE

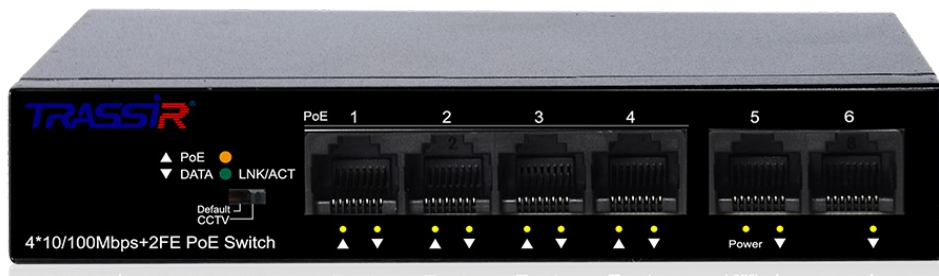

TRASSIR TR-NS1106-60-4POE is an unmanaged switch with 4 10/100 Mbps PoE ports with the ability to power up the connected devices power twisted pair.

Basic equipment:

- Switch 1pcs.
- Power adapter 1pcs.
- Datasheet 1pcs.

Specification:

Model	TRASSIR TR-NS1106-60-4POE
Ethernet ports	4*10/100 Mbps 2 Uplink * 10/100 Mbps
PoE protocols	IEEE802.3af/at
Maximum capacity per port	32W General: 60 W
Power pinout via PoE	DC+: 1/2 DC-: 3/6
Switching capacity	1.2 Gbps
Transmission speed	0.89 M pps
Buffer size	448 Kbyte
MAC addresses table sizes	1000
Stream management	Enabled by default
Function	Normal mode CCTV
PD Alive ¹	Supported. The port restarts 180 seconds after device connection loss
Power	100-240 V DC power adapter
Lightning protection	Standard mode 4 кV Differential mode 2 кV
Electrostatic discharge protection	Air discharge 8кV Contact discharge 6кV
Power consumption	65W (PoE: 60W + Switch: 5W)
Working temperature	0°C...40°C
Permissible humidity level	5 – 90 %
Weight, kg	0.630
Dimensions (W xD x H), mm	140 x 76.7 x 28

¹ For more details, see the user manual for the device.

Warranty service:

- Two - year warranty service from the date of sale.
- In case the warranty card absence, the warranty period is determined from the date of sale.

You can check the detailed description of the device settings in user guidelines on our web site www.trassir.com.

DATE OF SALE

DEVICE SERIAL NUMBER