




DATASHEET TR-NS11191S-285-16PoE

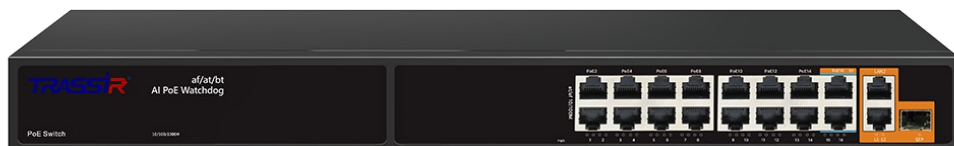

TR-NS11191S-285-16PoE is an unmanaged switch with 1x10/100/1000 Mbps and 15x10/100 Mbps PoE port with the ability to power up the connected devices through twisted pair.

Basic equipment:

- Switch 1pcs.
- Power cord with adapter 1pcs.
- Rack mounting kit 1pcs.
- Device datasheet 1pcs.

Specification:

Ethernet ports	1 x 10/100/1000 Mbps (Base-T) 15 x 10/100 Mbps (Base-TX) 2 x 10/100/1000 Mbps (Uplink, Base-T) 1 x 1000 Mbps (SFP)	
PoE Standards	Ports 1-14: IEEE802.3af/at	Ports 15-16: IEEE802.3af/at/bt
Maximum capacity per port	Total: 285W Ports 1-14: up to 30W	Ports 15-16: up to 60W
Power pinout via PoE	Ports 1-14: DC+: 1/2 DC-: 3/6	Ports 15-16: DC+: 1/2/4/5 DC-: 3/6/7/8
Switching capacity	12.8 Gbps	
Transmission speed	1.48 Mpps	
Buffer size	3 MB	
MAC addresses table size	8000	
Stream management	Enabled by default	
Function	Autoadaptation	
PD Alive ¹	Supported. The port restarts 240-420 seconds after device connection loss.	
Power consumption	90-240V AC power adapter	
Lightning protection	Standard mode 6kV Differential mode 4kV	
Electrostatic discharge protection	Air discharge 10kV Contact discharge 8kV	
Maximum power capacity	300W	
Working temperature	-30°C...60°C	
Permissible humidity level	10 – 90 %	
Weight, kg	2,65	
Dimensions (WxDxH), mm	440 x 180 x 45	

¹ For more details, see the user manual for the device.

Warranty service:

- Three - year warranty service from the date of sale.
- In case of the warranty card absence, the warranty period is determined from the date of sale.

DATE OF SALE

SERIAL NUMBER